DEKOLIGHT

LIGHT

TECHNICAL. LINEAR. EFFICIENT.

25 // 26

YOUR PERSONAL CONTACT PERSONS

Your personal advisors in the office and in the field are available to answer all your questions about our products and services.

MIRJAM GEBHARD

Key Account International

T +49 7248 9271 604
M +49 170 455 62 55
mirjam.gebhard@deko-light.com

SANDY TREIBER

Key Account International

T +49 7248 9271 603
M +49 151 724 525 83
sandy.treiber@deko-light.com

THE RIGHT LIGHTING FOR EVERY APPLICATION

Our versatile range for professional building lighting offers you the right solution - whether for refurbishment, modernisation or new build. With well thought-out lighting concepts and innovative products, we create optimum conditions for every application situation.

industrie

hotel and catering industry

living space

retail trade

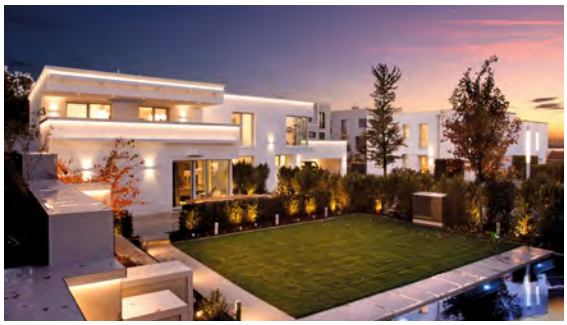

outdoor area

office

educational institution

healthcare facility

04 product highlights

INTERIOR LIGHTS

34 pendant lights
58 surface mounted ceiling lights
106 built in ceiling lights
156 downlights
178 insert panels
198 surface mounted wall lights
208 built in wall lights
218 reading lights
228 table and floor lights
238 showcase lights
246 office lights
270 hall floodlight
280 damp-proof luminaires

SINGLE-PHASE LIGHTS

294 single-phase lights

POWER RAILS

304 D ONE 1-phase power rail system
322 1-phase power rail luminaires
338 D Line 3-phase power rail system
370 D Line DALI 3-phase power rail system
398 power rail luminaires

BATTERY AND SOLAR LIGHTS

448 battery lights
456 solar lights

OUTDOOR LIGHTS

464 bollard lights
484 surface mounted wall lights
522 ceiling and wall lights
526 built in wall lights
532 spherical lamps
536 energy distributor
546 surface mounted / ground spike lights
556 wall washer
560 ground recessed lights
580 floodlight
586 display lights

SYSTEM LAUTARO

592 pendant lights
598 surface mounted ceiling lights

SYSTEM PLANO

604 luminaire system
622 profile system

SYSTEM COMBO

630 concrete profile
636 built-in profile
640 facade profile
644 insulation profile
646 click profile

ALUMINIUM PROFILES

652 linear light in 5 steps
656 assembly
658 homogeneous light image
660 U-profiles – flat + high – built-in / built-on
684 T-profiles – flat + high – built-in
702 H- and groove-profiles
710 step/plinth/angle/corner-profiles – built-in / built-on
734 dry contruction profiles
754 tile profiles
770 profiles for outdoor usw – walkable/trafficable

LED STRIPES

786 COB
800 12V
802 24V
840 48V
854 230V
856 mounting material for LED stripes

POWER SUPPLIES

862 DC – CV
878 DC – CC
892 AC – CV

CONTROLLER

898 RF-Smart
920 Casambi Bluetooth
922 DMX-controller / dimmer
926 DALI PWM dimmer

ILLUMINANTS

934 MR16 / GU53
935 G9 – GU10
939 E27
943 R7s – GX53

ACCESSOIRES

948 indoor
951 outdoor
959 chemical products

960 legend
968 lighting solutions
972 index

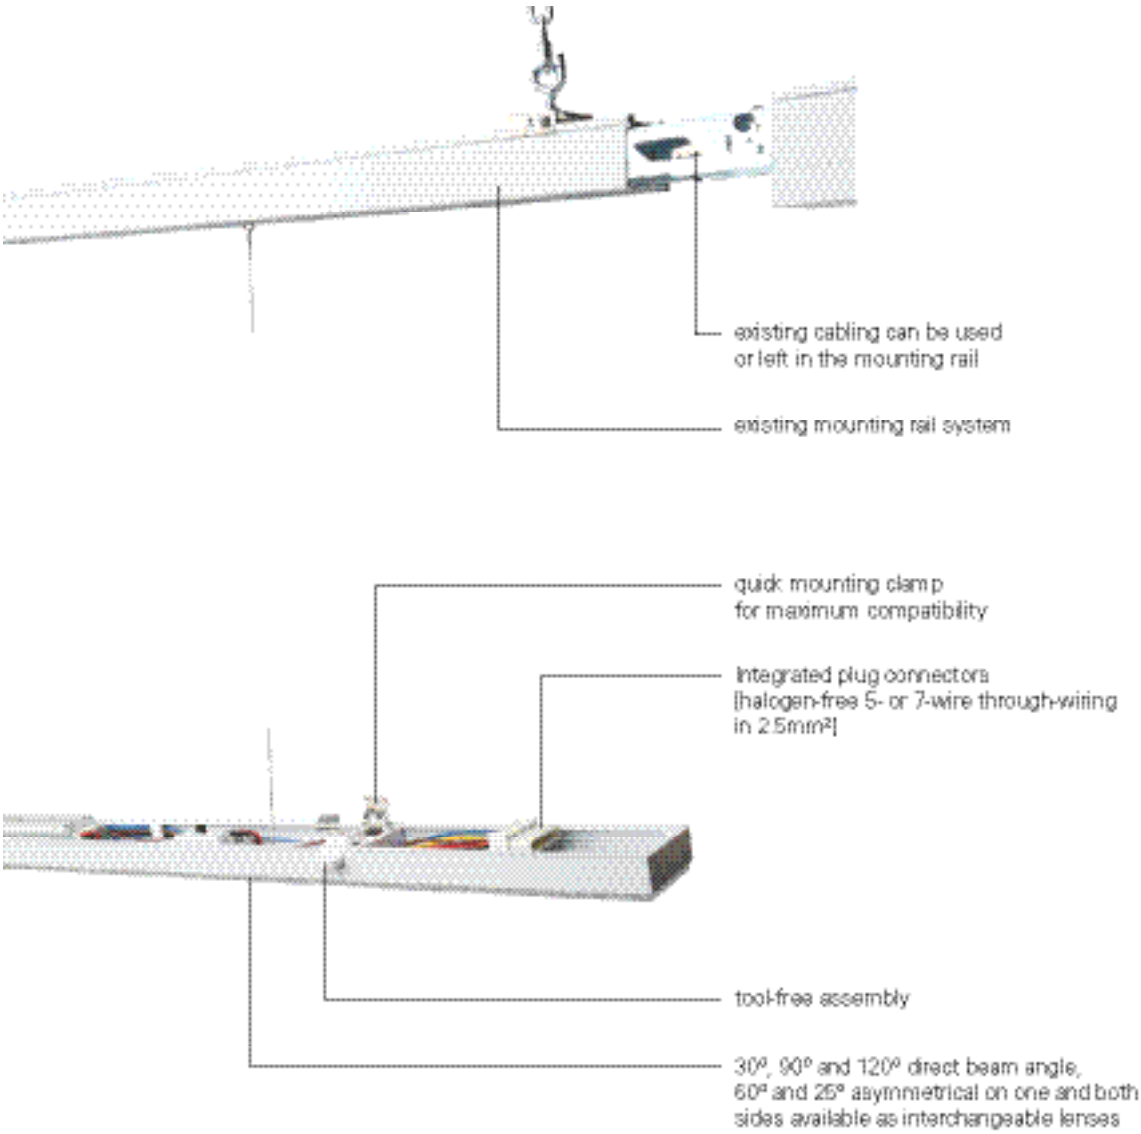

SANOTRUNK UNIVERSAL

LED refurbishment doesn't have to be a major construction project. With the right products, it can be completed quickly, safely and economically. With SANOTRUNK UNIVERSAL, DEKO-LIGHT offers an LED system for the simple retrofit of existing T5/T8 trunking systems, which is compatible with almost all common trunking rails on the market. This allows users to continue using their existing trunking rails without having to forgo the many advantages of modern LED technology.

All information on the SANOTRUNK UNIVERSAL can be found from page 290.

SANOTRUNK UNIVERSAL is compatible with over 40 brands and systems. You can find the complete list here.

SANOTRUNK UNIVERSAL is the ideal solution for refurbishing high-bay warehouses, industrial and storage halls, or DIY and supermarkets, and sets new standards in terms of compatibility. Thanks to quick-mounting clips and tool-free installation, the system can be quickly and easily integrated into existing trunking systems. The retrofit takes place in five simple steps:

1

REMOVE OLD LUMINAIRE INSERTS
Simply unclip the existing T5/T8 luminaires from the current trunking rail – the wiring remains in the rail and does not need to be replaced.

2

HOOK IN NEW LED MODULES
The SANOTRUNK LED modules are inserted into the existing trunking rail without tools – no drilling or screwing required.

3

CONNECT MODULES AND SET OUTPUT
The LED modules can be connected quickly and securely using integrated plug connectors. Optionally, the desired power level can be selected via the power switch.

4

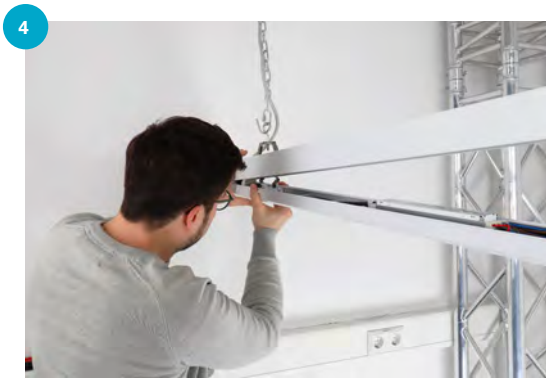

CLICK IN MODULES
The pre-mounted quick-mounting clips ensure a secure fit in the trunking rail – regardless of the manufacturer.

5

DONE
The retrofit is complete – the new LED lighting is ready for immediate use.

BENEFITS FOR EVERY APPLICATION

The SANOTRUNK UNIVERSAL refurbishment insert offers a wide range of possible applications and enables sustainable modernisation of your lighting.

Supermarket / Sales Area
Optic: 25° asymmetric, single- or double-sided
Benefit: The asymmetric light distribution illuminates shelf areas precisely, avoids stray light in the aisles, and creates a pleasant, sales-promoting atmosphere.

Industrial and Production Halls
Optic: 90° beam angle
Benefit: Uniform, standard-compliant illumination of work areas. Ideal for precision tasks and safety-relevant activities.

Warehouse / High-Bay Storage
Optics: 30°, 60° or 90°
Benefit: Deep shelving aisles and varying storage heights can be illuminated with pinpoint accuracy. The light reaches the lowest and highest levels – without shadows or isolated light spots.

Workshops / Assembly Areas
Optic: 120° beam angle
Benefit: Broad, low-shadow illumination of entire rooms. Perfect for fine assembly work, inspections, or manual tasks with high lighting requirements.

PRO OFFICE SANO

The PRO OFFICE SANO ceiling luminaires are the ideal solution for converting old grid luminaires to modern LED technology – quickly, efficiently and without complex renovation work. Thanks to their well-designed housing shape, the panels are slightly larger than traditional T5/T8 luminaires and effortlessly cover old drill holes or discoloration on ceilings and walls. This not only eliminates the need for painting, but also ensures a clean, uniform appearance.

Installation is fast and tool-free thanks to safety cables, mounting brackets and plug-in systems – often manageable by a single person. This significantly reduces installation effort without compromising on safety or stability. All panels feature a three-step adjustable colour temperature (3,000 K / 3,500 K / 4,000 K). The TRIAC models also offer four-level power adjustment – ideal for optimising energy consumption and brightness.

The microprismatic surface and a 90° beam angle ensure glare-free, uniform lighting that meets the requirements for computer workstations according to EN 12464-1. With a colour rendering index of Ra ≥ 90, the panels provide high-quality light for productive work. In addition to their high efficiency (up to 5,500 lumens at just 42 W), the luminaires are also suitable for emergency power operation (176–280 V/DC, EOFI: 95%) – a valuable feature for safety-relevant areas. All models are eligible for BEG funding, making them particularly attractive for sustainable refurbishment projects in existing buildings.

All information on PRO OFFICE SANO can be found from page 98.

1

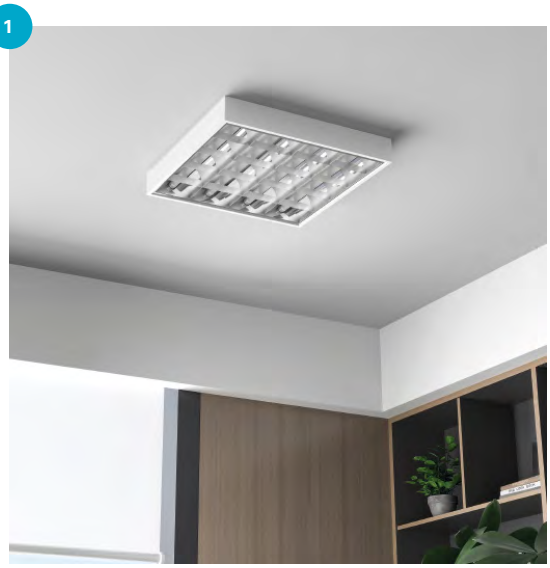

old T5/T8 grid luminaire on the ceiling

2

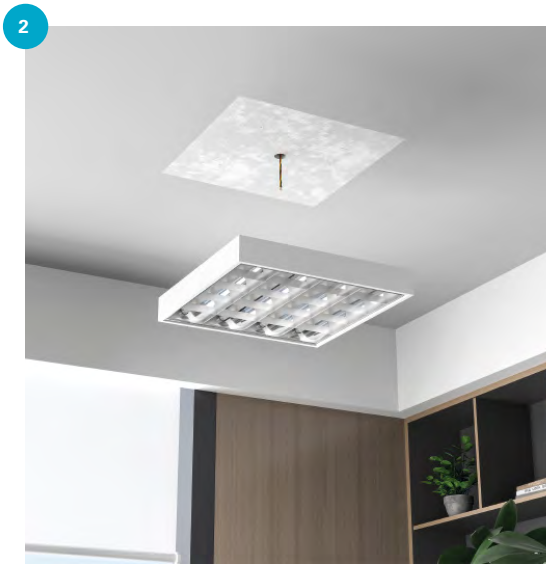

remove old grid luminaire

3

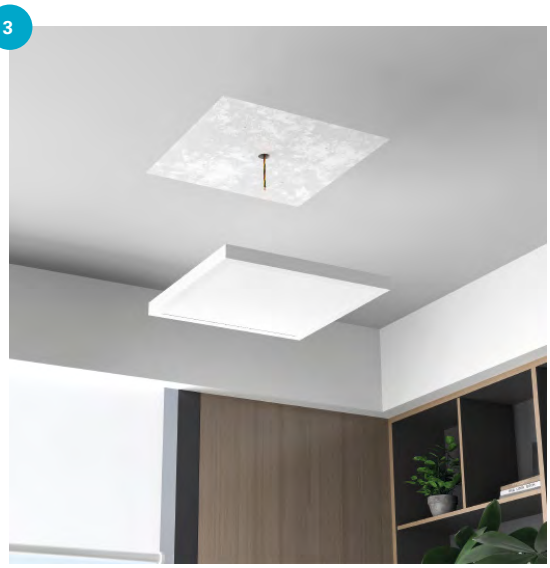

hook in new panel – with safety cable and pre-assembled plug connection

4

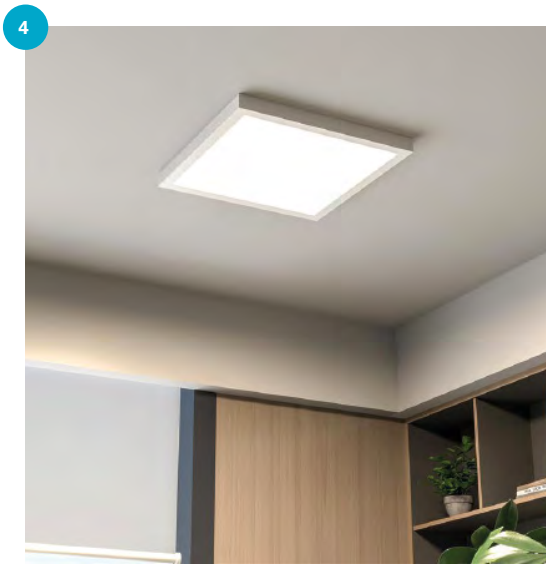

slide panel onto mounting bracket – luminaire sits securely

TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control [see list]. This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.

Overview of variants

- housing colour: black, light grey, white
- colour temperature: 2700K, 3000K, 4000K
- beam angle: 15°, 30°, 45°
- control: DALI 2.0, DT6, push dim

The TARVOS series meets the requirements for BEG funding (Federal Funding for Efficient Buildings). Combined with its high energy efficiency and long-lasting LED technology, the recessed spotlights thus present a future-proof solution from both economic and ecological perspectives – especially for refurbishment projects in existing buildings. The range covers offices, corridors and stairwells, retail and gastronomy areas, as well as public facilities.

All information on the TARVOS series can be found from page 130.

ANIK

The ANIK series stands for modern lighting solutions with minimal installation depth and maximum design freedom. With its elegant design language – available as either round or square versions – and three variants [Standard, CCT, RGBW], it offers flexible options for indoor use. The downlights are equipped with high-quality LEDs and feature a wide light distribution of 120° as well as excellent colour rendering [Ra > 90]. Additionally, low glare [UGR < 19] ensures high visual comfort – ideal for computer workstations and longer stays in the room.

Thanks to the particularly slim design [maximum installation depth 36 mm] and its elegant aluminium housing, the ANIK is perfect for demanding applications in ceilings with limited installation depth – for example in hotels, shops, corridors, or bathrooms. The series is splash-proof according to IP44 [downwards when installed] and can be individually combined with suitable power supplies.

All luminaires in the ANIK series are supplied without power supplies and can be combined with various dimmable or switchable drivers. The extensive accessories enable flexible integration into existing or new control systems [e.g., DALI DT6/DT8, Casambi, PWM, or wireless].

All information on the ANIK series can be found from page 158.

OVERVIEW OF VARIANTS

ANIK ROUND
Classic round downlights in four sizes and three colour temperatures [2,700 / 3,000 / 4,000 K]. Ideal for use in residential and commercial areas.

ANIK ROUND CCT
Tunable white variant for dynamic light atmospheres from 2,700 - 6,500 K. Controllable via DALI, RF-Smart, Casambi, or DMX.

ANIK ROUND RGBW
The ANIK for coloured light accents: RGB reproduction plus warm white [3,000 K] for creative applications.

ANIK SQUARE
Square version in four sizes and three colour temperatures [2,700 / 3,000 / 4,000 K] – for modern, clean architectures.

ANIK SQUARE CCT
Tunable white variant in square format – individually controllable, e.g., for modern offices, hotels, or retail spaces.

ANIK SQUARE RGBW
RGBW solutions in square format for impressive accents and individual light design.

ACRUX PRO

The ACRUX PRO series combines compact design with maximum functionality. Whether for living spaces, corridors, or commercial areas, the recessed downlights impress with their high light quality [Ra > 90], flexible adjustment options, and easy installation.

Thanks to the integrated power supply, a 230V direct connection is possible without additional accessories. The integrated CCT switch allows the colour temperature to be set before installation to 2,700 K, 3,000 K, or 4,000 K – ideal for different room requirements. For models from Ø 145 mm upwards, an additional power switch is used to adjust the output in three stages. This enables precise control of the light output – all without external control.

With a high efficiency of over 120 lm/W, IP54 protection rating [downwards], and the possibility for through-wiring, the ACRUX PRO is also well suited for larger installation projects. Additionally, it is BEG eligible and thus meets all requirements for energy-efficient construction and renovation.

All information on the new ACRUX PRO can be found on page 157.

ALWAID PRO

The new ALWAID PRO series combines functional wall-mounted recessed luminaires with a compact design, elegant appearance, and practical features. With a mounting depth of only 39 mm, the luminaires fit into all common 68 mm switch boxes – whether standard or deep versions. This makes the ALWAID PRO ideal for renovations and new constructions with limited space.

The ALWAID PRO series offers maximum design freedom: all luminaires are available with both round and square covers. Two colour options are available for the housing – white and black – as well as two high-quality material finishes: aluminium and glass/polycarbonate. Additionally, a selection of geometric light exit openings provides individual lighting moods depending on the application and architectural requirements. Furthermore, the recessed spots [2,700 K or 3,000 K] are available as dimmable versions or as ALWAID PRO MOTION with integrated motion sensor. The latter additionally offers a two-stage power switch [2 W / 4 W] for individual adjustment of light output.

All variants are equipped with an integrated power supply for 230V direct connection and can be easily through-wired – ideal for series installations in corridors or staircases.

All information on the new ALWAID PRO can be found from page 208.

CAN MIX'N MATCH

The new CAN series is the all-round solution for both private and commercial use – more extensive than ever before! Whether pendant light, ceiling light, wall light, reading light, track light, table and floor lamp, or outdoor luminaire – CAN is available in numerous variants and feels at home almost anywhere: living rooms, hotel rooms, restaurants, or garden areas.

With the new Mix'n Match variant – available for almost every type of luminaire – CAN can now be designed even more individually and adapted to different environments. The modular principle includes base, cylinder housing, and reflector ring as well as individual accessories, which, however, do not affect the look of the luminaire itself.

All information on the CAN MIX'N MATCH series can be found from page 94.

1 **choose BASE**
Define the CAN luminaire type:
ceiling light, wall light, floor lamp, etc.

2 **select CYLINDER HOUSING**
The cylinder housing is available in six different colours:
black, white, dark grey, brass, bronze, rose gold.

3 **add REFLECTOR RING**
Combine the reflector ring colour-matched to the cylinder housing or create a deliberate contrast.

4 **ACCESSORIES [optional]**
If desired, the CAN can be complemented with a honeycomb filter or a special lens.

base [6 types]
1/3
cylinder housing [6 colours]
2/3
softening lens [optional]
spread lens [optional]
honeycomb filter [optional]
reflector ring [4 colours]
3/3
acrylic attachment [optional]

HIGHBAY BASIC

The HIGHBAY BASIC series combines high luminous output, robust industrial quality, and maximum energy efficiency – ideal for workshops, production areas, warehouses, or sales areas with high ceilings. Both variants – HIGHBAY BASIC and HIGHBAY BASIC DALI – impress with a compact IP65 housing featuring integrated power and CCT control, allowing flexible adjustment of power [110W / 160W / 210W] and colour temperature [4,000K / 4,500K / 5,700K] to suit the specific usage and environment.

With a luminous flux of up to 34,500 lumens and a wide beam angle of 90°, the HIGHBAY BASIC is perfect for large-area lighting. Optional lenses [60° / 120°] enable targeted light control, for example in aisleways, production floors, or sales areas. The DALI version is also equipped with a modern DALI-2 / DT6 D4i driver and supports Intelli-Data for monitoring energy, maintenance, and luminaire data according to DALI Parts 251, 252, and 253 – a real advantage for smart lighting networks in industrial settings.

HIGHBAY BASIC AT A GLANCE

- high luminous flux up to 34,500 lm
- selectable power: 110W / 160W / 210W
- switchable color temperature: 4,000K / 4,500K / 5,700K
- protection rating IP65 – ideal for industrial and commercial use
- robust IK08 housing made of aluminum and steel
- beam angle: 90° [optional: 60° / 120°]
- DALI 2 DT6 D4i [for DALI version] including Intelli-Data

FOR INDUSTRY, TRADE, AND COMMERCIAL USE

The HIGHBAY BASIC series is ideal for all applications requiring high light output, long operating hours, and economical operation, such as industrial halls, supermarkets, hardware stores, car dealerships, or storage areas. The simple installation with chain suspension or wall bracket, flexible control options, and robust materials make this series the perfect solution for energy-efficient lighting concepts with high operational reliability.

All information on the HIGHBAY BASIC can be found from page 270.

GODOWAY

4
4
5
5
0 1 8
0 1 8
4 - 2 -
4 - 2 - 1

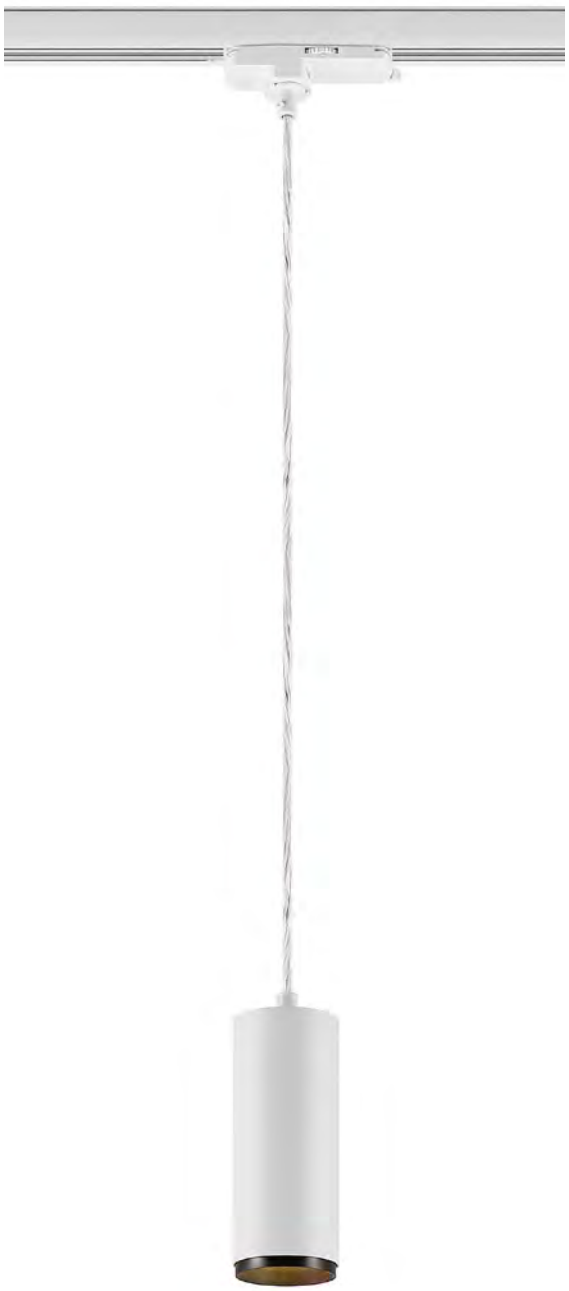

LUCEA DALI

The LUCEA DALI track luminaires combine minimalist design with state-of-the-art control technology – ideal for projects where aesthetics, flexibility, and precise lighting control are equally important. Whether in retail, office, or public spaces, LUCEA blends seamlessly into any interior and can be controlled via DALI 2 / DT6 or Push-Dim with high precision.

The LUCEA DALI series is available in two versions: a classic spotlight and an elegant pendant luminaire. Both are fully compatible with the exclusive D LINE DALI track system available from DE-KO-LIGHT. All models in the series are emergency power-capable [176–280 V/DC, EOFI: 100 %] and come in various output levels [10 to 40 W], with fixed or switchable colour temperatures [CCT: 3,000 K / 4,000 K], and selectable luminous flux [up to 4,480 lm] – ideal for zoned lighting, accent lighting, or general illumination.

LUCEA DALI luminaires are perfect for high-end lighting concepts in retail environments, gastronomy, offices, hotels, galleries, or residential spaces. With their clean cylindrical design in black or white and tool-free mounting onto track systems, they offer both technical and visual flexibility. A wide range of accessories – including barn doors, interchangeable lenses [24° / 60°], and decorative black reflector rings – allows for custom lighting effects that can be adapted at any time.

All information on LUCEA DALI can be found from page 426.

1,080 GOOD REASONS

The LAUTARO surface-mounted and pendant light offers so many variants. But don't worry: the configuration is very simple! LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common: it is round or ring-shaped and has a uniform, all-round light emission. But that's where the similarities end. All other product features can be selected, making LAUTARO ideal for a wide range of commercial [and private] applications, including reception areas, restaurants, atriums, open-plan offices and much more.

DALI for all
All LAUTARO variants are equipped with an integrated DALI power supply unit and are dimmable. The power supply units are suitable for emergency power and facilitate installation thanks to integrated loop-in/loop-out technology.

All information on the LAUTARO series can be found from page 588.

Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.

6 STEPS TO A CUSTOMISED LAUTARO

1. **SELECT THE PRODUCT VARIANT**
   The LAUTARO is available as a surface-mounted or pendant luminaire - the latter with two types of suspension and direct or direct/indirect lighting.

2. **SELECT THE PROFILE**
   There is a choice of three different profiles [height x width in mm]: 60x40, 80x55 and 100x80.

3. **SELECT THE DIAMETER**
   In order to use the LAUTARO in different room sizes and applications, it is available in four diameters: 600, 900, 1,200 and 1,500 mm.

4. **SELECT THE HOUSING COLOUR**
   Black, grey, white - each in matt with a powder-coated surface. Individual RAL colours are available on special request.

5. **SELECT THE DIFFUSER**
   In addition to the opal diffuser, a microprismatic version is also available for for use in workplaces with particularly low glare [UGR<19].

6. **SELECT THE COLOUR TEMPERATURE**
   2,700K, 3,000K or 4,000K - incandescent lamp, warm white or neutral white. With these three colour temperatures, you can cover most lighting requirements.

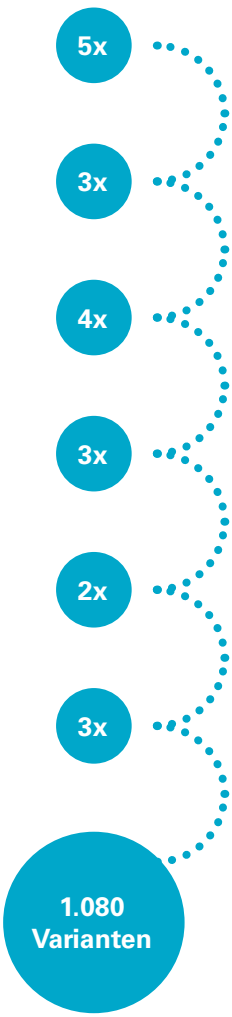

SHORELINE

The SHORELINE PRO series features premium surface-mounted wall luminaires for outdoor use, offering maximum design freedom for modern façade and architectural lighting. With more than a dozen models in round or square designs – available as downlights or up-and-down variants – the series covers a wide range of applications, from residential and commercial buildings to hotel and hospitality environments.

All luminaires are made from durable die-cast aluminum, are seawater-resistant, and offer IP65 protection and IK08 impact resistance. The integrated technology allows for two-stage color temperature switching [3,000K / 4,000K] directly on the unit, while the high-quality optics ensure targeted, uniform light distribution.

These lights have been developed for use in coastal regions and can withstand the increased salt and moisture in the environment - ideal for outdoor areas near the sea.

EASY INSTALLATION
The SHORELINE PRO series has been specifically designed for fast and secure installation, featuring several well-thought-out mounting details:

- detachable mounting plate with plug-in connector for easy pre-installation
- angled locking screws for improved accessibility during fastening
- through-wiring capability for continuous row installation
- optional spacers available for a clean and elegant surface-mount – even on uneven walls

ACCESSORIES FOR SHORELINE PRO

- reflector inserts: 24°, 30°, 36°, 60° [depending on the model]
- covers: with slot or triangle openings [for directional light emission]
- spacers: for clean surface mounting on uneven backgrounds

Note: All accessories are available in colors matching the housing finish [white, black, grey].

All information on the SHORELINE series can be found from page 484.

FACADO II

FACADO II is our flexible solution for outdoor lighting - either as a bollard light or as a wall light. In both versions, the IP65 luminaires made of robust die-cast aluminium offer a wide range of optical options: angular or round shape, with opal or transparent diffuser in smoked glass look, in dark grey or rust housing colours. diffuser in smoked glass look, in the housing colours dark grey or rust. The FACADO II bollard luminaires are also available in two different sizes [650 mm / 1,000 mm]. For even more flexibility, the FACADO II has an E27 socket for interchangeable light sources. Both FACADO II versions enable quick and easy installation: the wall luminaires have a removable mounting plate with plug-in connection and screwless connection terminals. The bollard luminaires are supplied with an IP67 connection box with double M20 cable gland
which is suitable for underground cables with 3x 1.5 mm2, 5x 1.5 mm2 or 3x 2.5 mm2, among others. All FACADO II luminaires can also be through-wired.

All information on the FACADO II series can be found from page 466.

ROLLABLE COVER

The new rollable cover for LED profiles opens up entirely new possibilities in lighting design. Supplied as a 20-meter roll, the flexible cover can be cut with millimeter precision—ideal for seamless light lines without visible joints, gaps, or interruptions. Especially in longer lighting runs, angled rooms, or complex ceiling shapes, this solution offers significant advantages over rigid diffuser profiles.

Thanks to its frameless design, the visible profile edge disappears completely—leaving behind a smooth, continuous light surface that integrates perfectly into architectural elements, furniture, or ceiling and wall structures. Whether used as general lighting, for accent lines, or as a decorative feature, the rollable cover is an innovative, professional solution for electricians, lighting designers, and architects alike.

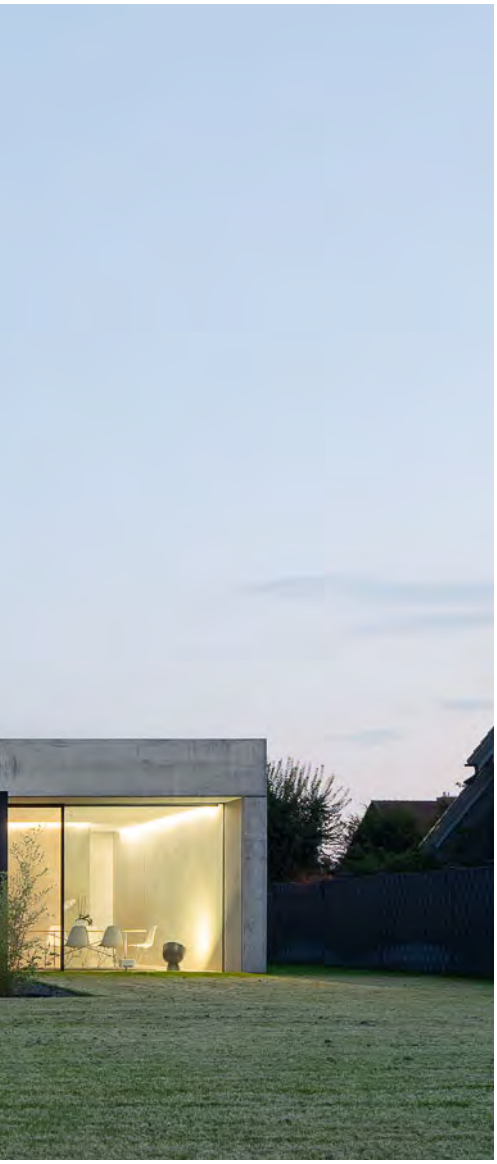

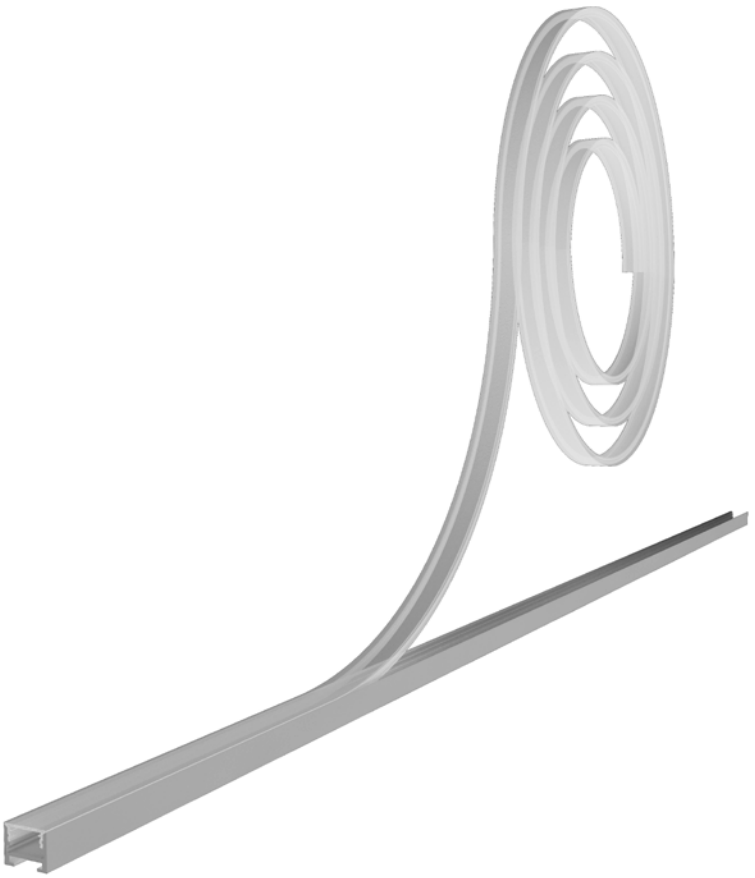

3 VARIANTS
The rollable covers are available in three variants:

- frosted – for soft, diffused light without visible light spots
- clear – for maximum efficiency and direct lighting
- black – for particularly discreet applications with full light output and architectural effect

COMPATIBILITY
The rollable LED profile covers are compatible with the following DEKO-LIGHT profile types:
AU-10-12, EL-04-12, EU-10-12, EV-11-12, EV-12-12

The matching profiles can be found from page 708.

FACADE LONG RUN 48V

The FACADE LONG RUN 48V series is specially designed for use on exposed façades and outdoor areas with direct sunlight. Featuring a UV-resistant casing, an operating temperature range from -40 to +95 °C, and an IP67 rating, it is the perfect solution for all environmental conditions – including sauna applications. Available in lengths of 5 or 15 meters, the flexible COB LED strips deliver homogeneous light runs without visible breaks – ideal for large-scale illumination of buildings, walls, pathways, or architectural lines. Thanks to the 48V operation, long power feed lines can be efficiently implemented without visible brightness loss.

Whether warm white for atmospheric light lines or RGB for colorful accents – the FACADE LONG RUN series offers the right solution for every application. Particularly practical are the combination models with RGB plus warm or neutral white [3,000K or 4,000K], which combine atmospheric color effects with functional lighting – without the need for additional light sources. Switchable versions with CCT [2,700K-6,500K] also allow variable lighting design depending on time of day, architecture, or use. All variants are dimmable via suitable controllers and can be quickly and securely installed using a wide range of accessories such as silicone end caps, clamps, plastic profiles, or power feed cables.

All information on the LED Stripes can be found from page 792.

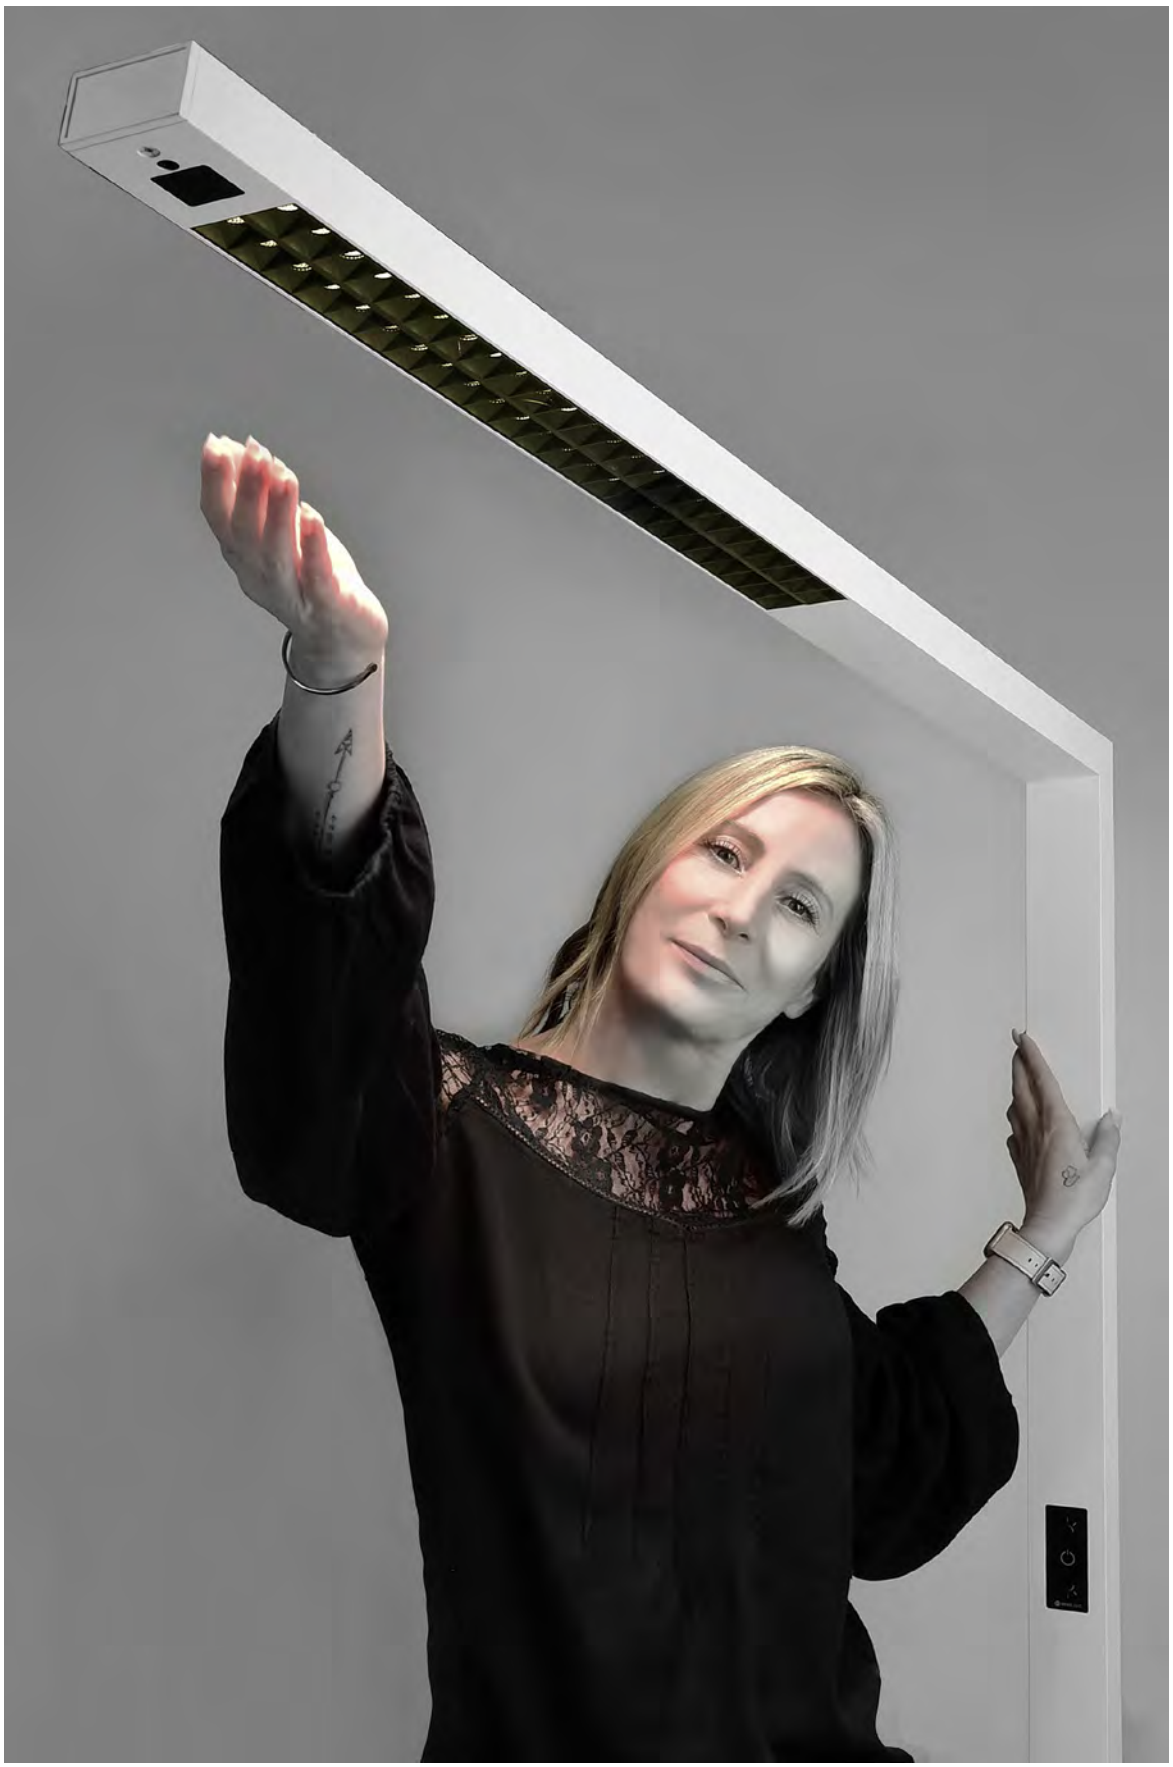

INTERIOR LIGHTS

34 pendant lights
58 surface mounted ceiling lights
106 built in ceiling lights
156 downlights
178 insert panels
198 surface mounted wall lights
208 built in wall lights
218 reading lights
228 table and floor lights
238 showcase lights
246 office lights
270 hall floodlight
280 damp-proof luminaires

pendant lights

page 34

page 36

page 39

page 40

page 42

page 44

page 45

page 46

page 48

page 50

page 51

page 52

page 53

page 54

MENKAR

The pendant lights in the MENKAR series impress with clever lighting functions and high-quality aluminium accents. The separate rear light (approx. 15 - 20 % indirect light component) enables permanent indirect lighting. The light colour can be adjusted in 2 stages [3000/4000K] via a CCT switch.

CCT

MENKAR

- **Indirect and direct lighting**
- **High light intensity**
- **Light colour adjustable in two stages**
- **Can be suspended by up to 1,800/3,000 mm [depending on model]**
- **Optional diffuser lens for UGR<19**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Height	90 mm	IK Protection Class	IK04
Base Height	30 mm		



342201

Article	Housing Color		Luminous Flux	Power	Ø	Pendulum Length	Base Ø	Price
342201	White	WW NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 239.95**
342202	Black	WW NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 239.95**
342203	Silver	WW NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 239.95**
342204	Coffee	WW NW	3300/3500 lm	45.0 W	400 mm	1800 mm	100 mm	**€ 239.95**
342205	White	WW NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 399.95**
342206	Black	WW NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 399.95**
342207	Silver	WW NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 399.95**
342208	Coffee	WW NW	5600/6000 lm	65.0 W	600 mm	1800 mm	120 mm	**€ 399.95**
342209	White	WW NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 559.95**
342210	Black	WW NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 559.95**
342211	Silver	WW NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 559.95**
342212	Coffee	WW NW	8400/8700 lm	90.0 W	800 mm	3000 mm	150 mm	**€ 559.95**

Accessories for **342201**, **342202**, **342203**, **342204**
930709 Diffusing lenses UGR 19 for Menkar 400 lamp **€ 14.95**

Accessories for **342205**, **342206**, **342207**, **342208**
930710 Diffusing lenses UGR 19 for Menkar 600 lamp **€ 24.95**

Accessories for **342209**, **342210**, **342211**, **342212**
930711 Diffusing lenses UGR 19 for Menkar 800 lamp **€ 39.95**

MEROPE

The pendant lamps of the MEROPE series combine timeless elegance and subdued modernity. Available in the diameters 380, 580 and 780 mm, the light colour [3,000/4,000 K] can be selected before installation using a CCT switch. The exterior finish is brushed aluminium in the colours coffee and silver or matt powder-coated in black and white.

page 60

CCT

MEROPE

- **Light colour adjustable in two stages**
- **Can be suspended by up to 1,800/3,000 mm [depending on model]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Height	35 mm	IK Protection Class	IK04
Base Height	65 mm		



342189

Article	Housing Color		Luminous Flux	Power	Ø	Pendulum Length	Base Ø	Price
342189	White	WW NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 209.95**
342190	Black	WW NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 209.95**
342191	Silver	WW NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 209.95**
342192	Coffee	WW NW	2100/2200 lm	30.0 W	380 mm	1800 mm	220 mm	**€ 209.95**
342193	White	WW NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 279.95**
342194	Black	WW NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 279.95**
342195	Silver	WW NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 279.95**
342196	Coffee	WW NW	3100/3200 lm	42.0 W	580 mm	1800 mm	220 mm	**€ 279.95**
342197	White	WW NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 469.95**
342198	Black	WW NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 469.95**
342199	Silver	WW NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 469.95**
342200	Coffee	WW NW	4800/4900 lm	60.0 W	780 mm	3000 mm	275 mm	**€ 469.95**



Ra>90 UGR<19

SLIM ANGULAR

- **Extra-soft fabric cable**
- **Glare-free, due to low UGR value [<19]**
- **Slim design at just 39 mm in diameter**
- **Incl. silver-coloured reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Length	370 mm
Colour Temperature	2700 K	Base Width	80 mm
Luminous Flux	1500 lm	Base Height	26 mm
Power	15 W	Power Supply Unit incl.	Yes
Rated Input Voltage	220-240 V/AC	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm		
Pendulum Length	1800 mm	CRI (Ra)	90



342239

Article	Housing Color		Price
342239	Black	WW	**€ 209.95**
342240	White	WW	**€ 209.95**

IP20

Accessories

930744	Reflector ring white for Slim series		**€ 4.95**
930745	Reflector ring black for Slim series		**€ 4.95**
930746	Reflector ring gold-coloured for Slim series		**€ 5.95**
930748	36° lens for Slim series		**€ 4.95**
930749	60° lens for Slim series		**€ 4.95**

page 331

page 440

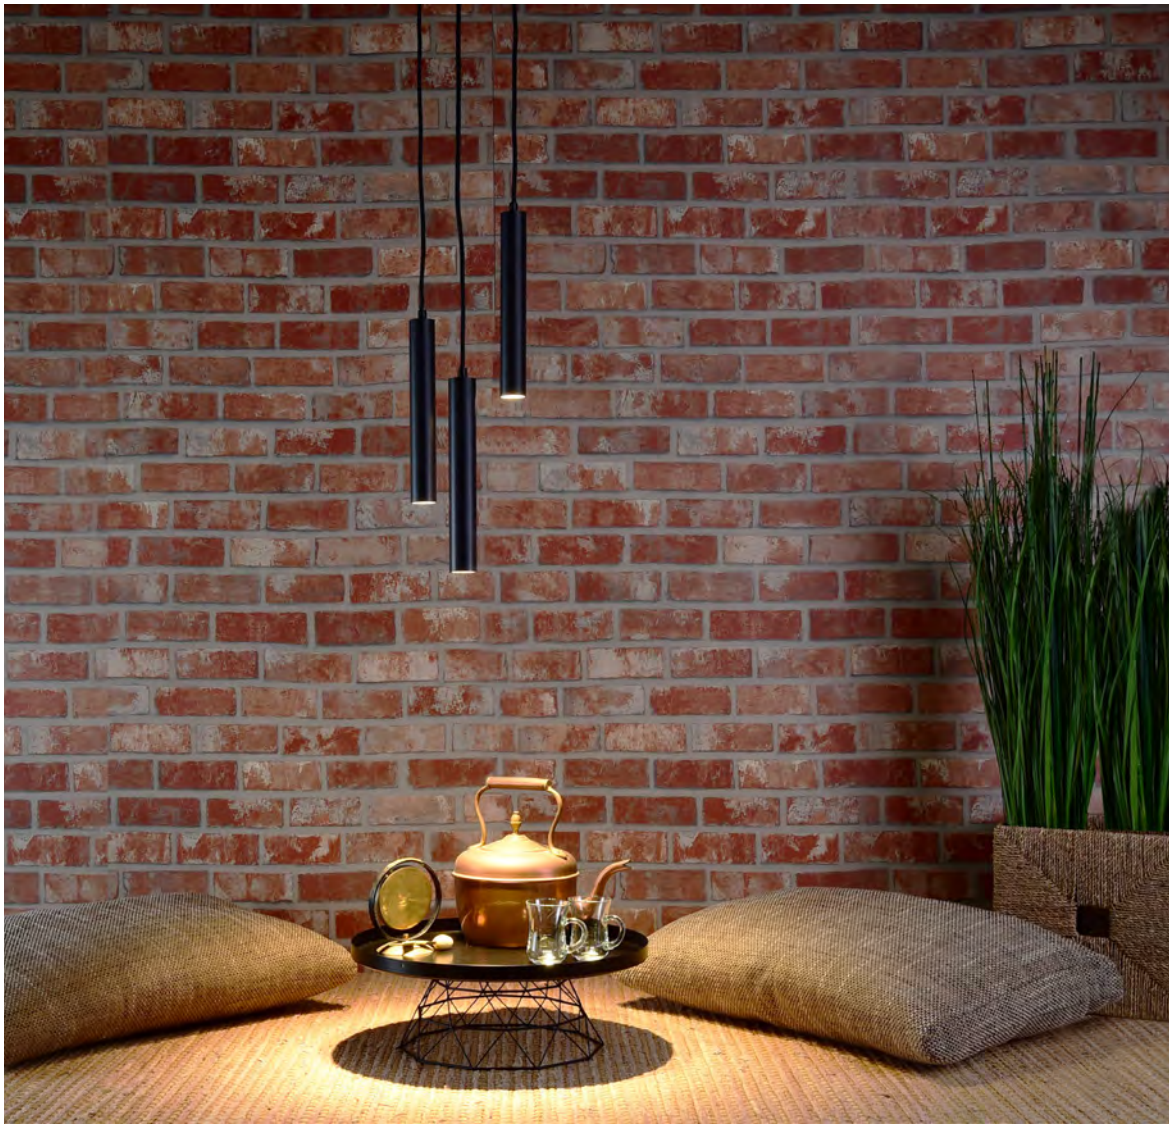

SLIM ROUND

SLIM series lights include single-luminaire and triple-luminaire pendant lamps, recessed ceiling lights and matching pendant lamps for the DEKO-LIGHT current track system. The die-cast aluminium light body is the same size for all variants [300 × 39 mm]. Several SLIM models therefore can also be combined with each other in larger spaces. The pendant lamps for ceiling installation with max. 180 cm suspended mounting are available in a one or three-luminaire variant; three-luminaire variant both with long or round base depending on the arrangement of the lights.
While the fixed SLIM models create a pleasant warm white light in dining rooms, reading nooks and more, the single-luminaire SLIM current track light is ideal for gastronomy and retail projects with changing room layouts. The premium SLIM series is rounded off with the opportunity for customisation using interchangeable reflector rings and lenses.

Ra>90 UGR<19

SLIM ROUND

- **Extra-soft fabric cable**
- **Glare-free, due to low UGR value [<19]**
- **Slim design at just 39 mm in diameter**
- **Incl. silver-coloured reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	25 mm
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Rated Input Voltage	220-240 V/AC	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm	CRI (Ra)	90
Pendulum Length	1800 mm		



342237

Article	Housing Color		Luminous Flux	Power	Base Ø	Price
342237	Black	ww	500 lm	5.0 W	100 mm	**€ 84.95**
342238	White	ww	500 lm	5.0 W	100 mm	**€ 84.95**
342241	Black	ww	1500 lm	15.0 W	240 mm	**€ 209.95**
342242	White	ww	1500 lm	15.0 W	240 mm	**€ 209.95**

Accessories

930744	Reflector ring white for Slim series		**€ 4.95**
930745	Reflector ring black for Slim series		**€ 4.95**
930746	Reflector ring gold-coloured for Slim series		**€ 5.95**
930748	36° lens for Slim series		**€ 4.95**
930749	60° lens for Slim series		**€ 4.95**

Accessories for **342237**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black		**€ 29.95**

Accessories for **342238**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white		**€ 29.95**

page 331

page 440

LUCEA CCT

LUCEA series pendant lights with CCT are available in 10, 15 and 20 W versions and offer up to 2,000 lumens of light output. The maximum suspended mounting is 1,800 mm. Optional lenses can be used to narrow or expand the light emission angle of the individual models. LUCEA lights feature a die-cast aluminium housing.

page 80 page 82 page 432 page 436

CCT Ra>90 SDCM<5

LUCEA CCT

- **Light colour adjustable in two stages**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Pendulum Length	1800 mm	CRI (Ra)	90
Base Height	29 mm	IK Protection Class	IK03
Base Ø	104.5 mm		



342177

Article	Housing Color		Luminous Flux	Power	Height	Ø	Price
342177	White	WW NW	930/1000 lm	10.0 W	157 mm	65 mm	**€ 139.95**
342178	Black	WW NW	930/1000 lm	10.0 W	157 mm	65 mm	**€ 139.95**
342179	White	WW NW	1460/1500 lm	15.0 W	178 mm	85 mm	**€ 159.95**
342180	Black	WW NW	1460/1500 lm	15.0 W	178 mm	85 mm	**€ 159.95**
342181	White	WW NW	1930/2000 lm	20.0 W	178 mm	85 mm	**€ 179.95**
342182	Black	WW NW	1930/2000 lm	20.0 W	178 mm	85 mm	**€ 179.95**

IP20

Accessories for **342177**, **342178**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **342177**, **342179**, **342181**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 29.95**

Accessories for **342178**, **342180**, **342182**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 29.95**

Accessories for **342179**, **342180**, **342181**, **342182**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

NEW Ra>90 SDCM<5

LUCEA

- **Extra-soft fabric cable**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Ø	104.5 mm
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Rated Input Voltage	200-240 V/AC	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm	CRI (Ra)	90
Pendulum Length	1800 mm	IK Protection Class	IK03
Base Height	29 mm		

Article	Housing Color		Luminous Flux	Power	Price
342243	White	WW	800 lm	6.0 W	**€ 129.95**
342244	Black	WW	800 lm	6.0 W	**€ 129.95**
342245	White	WW	1300 lm	10.0 W	**€ 139.95**
342246	Black	WW	1300 lm	10.0 W	**€ 139.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **342243**, **342245**
930913 68 mm Recessed Ceiling Adapter for Pendant Luminaires, white **€ 29.95**

Accessories for **342244**, **342246**
930914 68 mm Recessed Ceiling Adapter for Pendant Luminaires, black **€ 29.95**

page 84 page 85 page 332 page 333

NEW dtw Ra>90

LUCEA DTW

- **Extra-soft fabric cable**
- **Dim-to-warm 1,800 K-2,700 K**
- **Incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Pendulum Length	1800 mm
Colour Temperature	1800-2700 K	Power Supply Unit incl.	Yes
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Power	10 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	200-240 V/AC	CRI (Ra)	90
Height	157 mm	IK Protection Class	IK03
Ø	65 mm		

Article	Housing Color		Price
342247	White	WW	**€ 149.95**
342248	Black	WW	**€ 149.95**

IP20

Accessories

930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **342247**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 29.95**

Accessories for **342248**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 29.95**

page 80 page 82 page 432 page 436

CAN

The CAN pendant light in lengths 150 mm and 350 mm combines modern design with practical functionality. The GU10 base enables quick and simple replacement of the lamp. The screw-on cylinder enables tool-free maintenance and optional decorative rings allow colourful accents to be created. The pendant light is part of the CAN series, which also contains ceiling, wall, reading and outdoor lights and therefore provides versatile application options for private and commercial spaces.

NEW

CAN

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Sockets	1 PCS
Ø	60 mm	Max. Power	1x max. 7.5 W
Pendulum Length	1700 mm	Rated Input Voltage	220-240 V/AC
Base Height	27 mm	Control	Dimmable via optional light source
Base Ø	60 mm		

Article	Housing Color	Height	Price
342254	White	150 mm	**€ 64.95**
342255	Black	150 mm	**€ 64.95**
342256	White	350 mm	**€ 74.95**
342257	Black	350 mm	**€ 74.95**

GU10 | IP20

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

Accessories for **342254**, **342256**

930913	68 mm Recessed Ceiling Adapter for Pendant Luminaires, white	**€ 29.95**

Accessories for **342255**, **342257**

930914	68 mm Recessed Ceiling Adapter for Pendant Luminaires, black	**€ 29.95**

page 88 page 90 page 202 page 204 page 222 page 223 page 414

APOLLON

The APOLLON narrow, puristic pendant lamp fits into almost any environment seamlessly and in addition to the elegant visual design also delivers a rich warm white light. The APOLLON is available in two different sizes with a matte surface in black.

Ra>90

APOLLON

- **Especially narrow design**
- **High colour rendering**
- **Suspended mounting up to max. 3,000 mm**
- **Dimmable**

Application Area
Home / Living, Reception / Communication

Housing	Aluminium	Base Height	48 mm
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Rated Input Voltage	200-250 V/AC	Light Beam Angle	110 Degree
Width	8 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	80 mm		
Pendulum Length	3000 mm	CRI (Ra)	90
Base Width	35 mm		



342148

Article	Housing Color		Luminous Flux	Power	Length	Base Length	EEI	Price
342148	Black	WW	1755 lm	28.0 W	1004 mm	650 mm	G	**€ 344.95**
342150	Black	WW	2475 lm	42.0 W	1464 mm	850 mm	F	**€ 459.95**

IP20

SOCKET SEGULA DESIGN BULBS

The pendant lights are fitted with textile cables. This generous cable length enables flexible installation even in high rooms and allows individual height adjustment depending on the installation situation. The housing is characterised by a reduced, clear design language and is therefore ideal for modern architectural and lighting concepts in interiors. The E27 sockets used are deliberately oversized. The enlarged sleeve creates a visually harmonious unit between the socket and light source - without visible transitions or technical breaks. Compatible with our DESIGN-BULB light sources, this pendant luminaire is particularly suitable for project-oriented applications in the interior design, shop fitting or catering sectors. It provides an ideal basis for decorative lighting solutions with design requirements.

NEW

SOCKET SEGULA DESIGN BULBS

- **Sliding E27 socket sleeve(s) for adapting to lamps with special dimensions**
- **Ideal for use in conjunction with our designer bulb series**
- **Soft textile cable**
- **High-quality surface finish**

Housing	Metal, Plastic	Rated Input Voltage	220-240 V/AC
Height	80 mm	Connection Type	Connectionbox IP20
Ø	50 mm		

Article	Housing Color	Max. Power	Pendulum Length	Base Length	Base Width	Base Height	Base Ø	Price
930908	Black	1x max. 60.0 W	2.000 mm			20 mm	100 mm	**€ 59.95**
930909	Black	1x max. 60.0 W	5.000 mm			20 mm	100 mm	**€ 69.95**
930965	Black	3x max. 57.0 W	3.000 mm			25 mm	125 mm	**€ 194.95**
930966	Black	3x max. 57.0 W	1.500 mm	990 mm	150 mm	25 mm		**€ 329.95**

IP20 | E27

DEKO-LIGHT LED DESIGN-BULB ORBIT E27 DIMMABLE

Housing	Glass	Rated Input Voltage	220-240 V/AC
Light Beam Angle	330 Degree	Life Time	20000 h
Height	120 mm	Control	Trailing-edge dimmer
Ø	220 mm	Channels	1

Article	Housing Color	Colour Temperature	Luminous Flux	Power	CRI (Ra)	EEI	Price
180731	Smoky	WW 1900 K	185 lm	4.5 W	85		**€ 129.95**
180730	Gold	WW 2200 K	240 lm	4.0 W	90	A G	**€ 129.95**

E27 | IP20 | 1 CH

DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

Let our new designer light series ORBIT, SHINE and MOON take you into the world of style. The sophisticated luminous elements and the reflections generated in the glass create the impression of floating light. Whether light and airy in your living room at home or opulent and spacious in the hotel lobby - the dimmable LED lamps from the designer bulb series are perfect for open lights without shades or lampholders with E27 sockets and are a real eye-catcher wherever they are used.

Ra>90

DEKO-LIGHT LED DESIGN BULB SHINE E27 DIMMABLE

Housing	Glass	Rated Input Voltage	220-240 V/AC
Light Beam Angle	330 Degree	Life Time	20000 h
Height	190 mm	Control	Trailing-edge dimmer
Ø	200 mm	Channels	1
Power Consumption	5 kWh/1000h		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	CRI (Ra)	EEI	Price
180733	Smoky	WW 1900 K	210 lm	5 W	85		**€ 114.95**
180732	Gold	WW 2200 K	300 lm	4.5 W	90	A G	**€ 114.95**

E27 | IP20 | 1 CH

NEW

DEKO-LIGHT LED DESIGN BULB MOON E27 DIMMABLE

- **Glass body is manufactured by hand**
- **Filigree lamp**
- **Reflections create the impression of floating light**
- **Patented soft filament technology**
- **Suitable for decorative and creative lights with and without lampshade**
- **Ideal for use in combination with our sockets with sliding socket sleeve**

Housing	Glass	Control	Trailing-edge dimmer
Light Beam Angle	330 Degree	Channels	1
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Height	Ø	EEI	Price
180734	Smoky	WW 1900 K	220 lm	6.0 W	165 mm	125 mm		**€ 69.95**
180735	Smoky	WW 1900 K	260 lm	6.0 W	185 mm	150 mm		**€ 79.95**
180736	Smoky	WW 1900 K	300 lm	6.0 W	230 mm	200 mm		**€ 109.95**
180737	Smoky	WW 1900 K	350 lm	8.0 W	320 mm	300 mm		**€ 249.95**
180741	Black	WW 2200 K	240 lm	4.0 W	165 mm	125 mm	A G	**€ 89.95**
180742	Black	WW 2200 K	240 lm	4.0 W	200 mm	150 mm	A G	**€ 114.95**
180743	Black	WW 2200 K	240 lm	4.0 W	230 mm	200 mm	A G	**€ 149.95**

E27 | IP20 | 1 CH

68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

The recessed ceiling adapter is the ideal solution for discreetly and securely installing pendant lights weighing up to 2.5 kg. Thanks to the integrated three-pin connection box with strain relief and feed-through wiring, the adapter can be connected to the power supply quickly and reliably. Suitable for cable diameters of 5-7 mm and ceiling thicknesses of 2-15 mm, the adapter ensures that the light is seamlessly integrated into the ceiling. The result: A simple, high-quality look that discreetly conceals all electrical components and meets the highest aesthetic demands.

NEW

68 MM CEILING MOUNT ADAPTER FOR PENDANT LAMPS

- **Secure installation of pendant lamps in 68 mm ceiling recesses**
- **Includes three-pin connection box with strain relief and feed-through wiring**
- **Suitable for cable diameters of 5-7 mm**
- **Suitable for ceiling thicknesses of 2-15 mm**

Housing	Polycarbonate, Steel	Installation Depth	27 mm
Height	32 mm	Cut Out Ø	65-75 mm
Ø	90 mm		

Article	Housing Color	Price
930913	White	**€ 29.95**
930914	Black	**€ 29.95**

IP20

Accessories for **930914**

930908	Segula E27 socket for designer bulb, black, with 2 m fabric cable and canopy	**€ 59.95**
930909	Segula E27 socket for designer bulb, black, with 5 m fabric cable and canopy	**€ 69.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

surface mounted ceiling lights

page 58

page 60

page 62

page 64

page 66

page 68

page 69

page 70

page 74

page 75

page 76

page 77

page 78

page 79

page 80

page 82

page 84

page 85

page 86

page 87

page 88

page 89

page 90

page 92

page 94

page 94

page 96

page 97

page 98

page 101

page 102

MENKAR

MENKAR series ceiling and wall lights feature clever lighting functions and high-quality aluminium accents. The rear light (approx. 15-20 % indirect light) also allows additional indirect lighting.

page 34

CCT

MENKAR

- **Direct and indirect lighting (light proportion approx. 15-20 %)**
- **Light colour adjustable in two steps**
- **Optional diffuser lens for UGR<19**
- **Can be used as a wall or ceiling light (depending on model)**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium, Polycarbonate, Steel	Power Supply Unit incl.	Yes
		Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K		
Height	90 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK04



348198

Article	Housing Color		Luminous Flux	Surface	Ø	Power	Price
348200	Silver	WW NW	3300/3500 lm	Brushed	400 mm	45.0 W	**€ 219.95**
348201	Coffee	WW NW	3300/3500 lm	Brushed	400 mm	45.0 W	**€ 219.95**
348198	White	WW NW	3300/3500 lm	Matt	400 mm	45.0 W	**€ 219.95**
348199	Black	WW NW	3300/3500 lm	Matt	400 mm	45.0 W	**€ 219.95**
348204	Silver	WW NW	5600/6000 lm	Brushed	600 mm	65.0 W	**€ 379.95**
348205	Coffee	WW NW	5600/6000 lm	Brushed	600 mm	65.0 W	**€ 379.95**
348202	White	WW NW	5600/6000 lm	Matt	600 mm	65.0 W	**€ 379.95**
348203	Black	WW NW	5600/6000 lm	Matt	600 mm	65.0 W	**€ 379.95**
348208	Silver	WW NW	8400/8700 lm	Brushed	800 mm	90.0 W	**€ 539.95**
348209	Coffee	WW NW	8400/8700 lm	Brushed	800 mm	90.0 W	**€ 539.95**
348206	White	WW NW	8400/8700 lm	Matt	800 mm	90.0 W	**€ 539.95**
348207	Black	WW NW	8400/8700 lm	Matt	800 mm	90.0 W	**€ 539.95**

Accessories for **348198**, **348199**, **348200**, **348201**
930709 Diffusing lenses UGR 19 for Menkar 400 lamp **€ 14.95**

Accessories for **348202**, **348203**, **348204**, **348205**
930710 Diffusing lenses UGR 19 for Menkar 600 lamp **€ 24.95**

Accessories for **348206**, **348207**, **348208**, **348209**
930711 Diffusing lenses UGR 19 for Menkar 800 lamp **€ 39.95**

MEROPE

The timeless MEROPE demonstrates not only impressively high luminous flux and a low assembly height, it is also highly visually appealing thanks to its elegant outer aluminium ring – available in sandblasted white or black, brushed in silver or on-trend coffee. Available in the diameters 380 mm, 580 mm and 780 mm, the MEROPE can be integrated into very different environments even more flexibly.

In addition, the light colour can be adjusted in 2 stages, 3,000 K or 4,000 K.

page 36

CCT

MEROPE

- **High luminous flux**
- **Light colour adjustable in 2 stages**
- **Low assembly height**

Application Area
Home / Living

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K	CRI (Ra)	80
Height	60 mm	IK Protection Class	IK04
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes		



348186

Article	Housing Color		Luminous Flux	Surface	Ø	Power	Price
348188	Silver	WW NW	2100/2200 lm	Brushed	380 mm	30.0 W	**€ 189.95**
348189	Coffee	WW NW	2100/2200 lm	Brushed	380 mm	30.0 W	**€ 189.95**
348186	White	WW NW	2100/2200 lm	Matt	380 mm	30.0 W	**€ 189.95**
348187	Black	WW NW	2100/2200 lm	Matt	380 mm	30.0 W	**€ 189.95**
348192	Silver	WW NW	3100/3200 lm	Brushed	580 mm	42.0 W	**€ 269.95**
348193	Coffee	WW NW	3100/3200 lm	Brushed	580 mm	42.0 W	**€ 269.95**
348190	White	WW NW	3100/3200 lm	Matt	580 mm	42.0 W	**€ 269.95**
348191	Black	WW NW	3100/3200 lm	Matt	580 mm	42.0 W	**€ 269.95**
348196	Silver	WW NW	4800/4900 lm	Brushed	780 mm	60.0 W	**€ 449.95**
348197	Coffee	WW NW	4800/4900 lm	Brushed	780 mm	60.0 W	**€ 449.95**
348194	White	WW NW	4800/4900 lm	Matt	780 mm	60.0 W	**€ 449.95**
348195	Black	WW NW	4800/4900 lm	Matt	780 mm	60.0 W	**€ 449.95**

SCULPTORIS

Modern elegance for ceilings; the ceiling lights from the SCULPTORIS series can be used in a number of ways indoors thanks to different outputs, sizes and colour temperatures. The surface-mounted ceiling lights provide extensive illumination for rooms and also look great as wall lights.
The light is softly and extensively diffused through the large, circumferential diffuser with matt aluminium design and illuminates rooms pleasantly and evenly.

The light colours warm white (3,000 K) or neutral white (4,000 K) can be set for each variant.

CCT

SCULPTORIS

- **Light colour adjustable in 2 stages**
- **Uniform illumination**
- **Circumferential diffuser**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	150 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Surface	Matt	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK04
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
348180	White	WW NW	2000/2100 lm	100 mm	400 mm	30.0 W	**€ 269.95**
348181	Black	WW NW	2000/2100 lm	100 mm	400 mm	30.0 W	**€ 269.95**
348182	White	WW NW	3000/3100 lm	130 mm	600 mm	42.0 W	**€ 349.95**
348183	Black	WW NW	3000/3100 lm	130 mm	600 mm	42.0 W	**€ 349.95**
348184	White	WW NW	4100/4200 lm	130 mm	800 mm	60.0 W	**€ 579.95**
348185	Black	WW NW	4100/4200 lm	130 mm	800 mm	60.0 W	**€ 579.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

ZANIAH

Whilst flat surfaces and covers are the go-to for most surface-mounted ceiling lights, the ZANIAH places special emphasis on its 360° lamp [either a 12 W, 18 W or 24 W variant]. Replaceable covers allow the visual appearance of ZANIAH to be changed even after installation. The covers are available in eight colour variants, allowing plenty of scope for customisation.

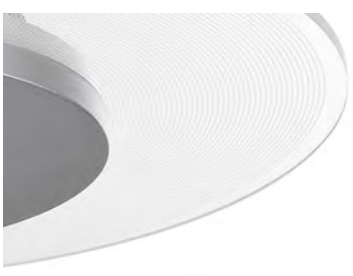

IK05

ZANIAH

- **Can be customised using coloured covers**
- **360° light emission angle**
- **Can be used as a wall or ceiling light**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Hotel / catering

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000 K		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	IK Protection Class	IK05
Light Beam Angle	120 Degree		

Article	Housing Color		Luminous Flux	Height	Ø	Power	EEI	Price
620033	Silver	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620034	Blue	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620035	Green	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620036	Red	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620037	Yellow	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620038	Grey	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620039	Black	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620040	White	WW	1510 lm	42 mm	290 mm	12.0 W	F	**€ 99.95**
620041	Silver	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620042	Blue	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620043	Green	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620044	Red	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620045	Yellow	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620046	Grey	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620047	Black	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620048	White	WW	2020 lm	46 mm	370 mm	18.0 W	G	**€ 109.95**
620049	Silver	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620050	Blue	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620051	Green	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620052	Red	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620053	Yellow	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620054	Grey	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620055	Black	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**
620056	White	WW	2565 lm	46 mm	420 mm	24.0 W	F	**€ 119.95**

IP20

ALTAIS 2 ROUND

The ALTAIS 2 Round is a modern ceiling and wall luminaire that is ideal for lighting solutions in commercial, public and private areas. Its clear, round design blends into a wide variety of architectural settings - from technical rooms, corridors and stairwells to modern residential and commercial areas. Thanks to the integrated CCT switch, the light colour can be adjusted in three stages (2700K / 3000K / 4000K). The output can also be adjusted in two stages to optimise energy efficiency and luminous efficacy depending on the room requirements. With through-wiring and surface-mounted cable entries, the installation options are very flexible. Installation is convenient thanks to a practical and time-saving click system.

As an eligible product in accordance with the requirements of the Federal Subsidy for Efficient Buildings (BEG), the ALTAIS 2 Round also contributes to energy-efficient refurbishment - a plus point for sustainable projects.

ALTAIS 2 ROUND

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 steps**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living

Housing	Polycarbonate	Rated Input Voltage	100-240 V/AC
Colour Temperature	2700/3000/4000 K	Light Beam Angle	120 Degree
Height	52 mm	CRI (Ra)	85
Base Height	20.5 mm	IK Protection Class	IK10

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348276	☐ White	WW NW	1650/1800/1800 lm	220 mm	180 mm	10.0 W / 15.0 W	**€ 69.95**
348277	☐ White	WW NW	1980/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 84.95**
348278	☐ White	WW NW	2750/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 99.95**

IP54

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

ALTAIS 2 ROUND MOTION

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 levels**
- **Adjustable motion detector with corridor function**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living

Housing	Polycarbonate	Light Beam Angle	120 Degree
Colour Temperature	2700/3000/4000 K	CRI (Ra)	85
Height	52 mm	Motion Detector	Yes
Base Height	20.5 mm	IK Protection Class	IK10
Rated Input Voltage	100-240 V/AC		

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348279	☐ White	WW NW	1650/1800/1800 lm	220 mm	180 mm	10.0 W / 15.0 W	**€ 99.95**
348280	☐ White	WW NW	1980/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 114.95**
348281	☐ White	WW NW	2750/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 129.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

ALTAIS 2 ROUND MOTION MS

- **Light colour adjustable in 3 stages**
- **Power adjustable in 2 levels**
- **Adjustable motion detector with corridor function**
- **Multi-master-slave configuration with up to 8 groups**
- **through-wiring possible**
- **Easy installation thanks to click system**
- **Optional surface-mounted cable entry**
- **BEG eligible**

Application Area
Bathroom / WC, Corridor / stairwell, Wellness / Spa / Gym, Workshop / Craft / Warehouse, Home / Living

Housing	Polycarbonate	Light Beam Angle	120 Degree
Colour Temperature	2700/3000/4000 K	CRI (Ra)	85
Height	52 mm	Motion Detector	Yes
Base Height	20.5 mm	IK Protection Class	IK10
Rated Input Voltage	100-240 V/AC		

Article	Housing Color		Luminous Flux	Ø	Base Ø	Power Selectable	Price
348285	☐ White	WW NW	1980/2160/2160 lm	280 mm	240 mm	13.0 W / 18.0 W	**€ 134.95**
348286	☐ White	WW NW	2750/3000/3000 lm	330 mm	280 mm	18.0 W / 25.0 W	**€ 149.95**

IP54

Accessories
931075 **€ 24.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

CCT IP54

HELEN

- **Light colour adjustable in 3 stages**
- **Splash water protected**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC, Hotel bathrooms / commercial wet areas

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000/5500 K	Power Supply Unit incl.	Yes
Surface	Brushed	Light Beam Angle	115 Degree
Base Height	20 mm	CRI (Ra)	80



348052

Article	Housing Color		Luminous Flux	Height	Ø	Power	Base Ø	Price
348051	Silver	WW NW CW	1400 lm	83 mm	276 mm	16.3 W	251 mm	**€ 79.95**
348052	Silver	WW NW CW	1800 lm	89 mm	351 mm	20.0 W	326 mm	**€ 119.95**

IP54 A ↑ G G

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

UNI II

The UNI II series comprises high-quality surface-mounted luminaires and track-mounted spotlights for use on walls and ceilings in commercial and private premises.

The rotating and swivelling luminaire heads of the UNI II series – available in white and black aluminium housing versions – are equipped with warm white COB LEDs and can be folded flush onto the base if required to shine vertically downwards like a ceiling spotlight. In addition to the single, double and triple versions, both a MINI version [with smaller luminaire head and base] and a MAX version are available.

THE SERIES AT A GLANCE

UNI II
The standard version [TILT] with 3,000 K is also available with two [DOUBLE] and three [TRIPLE] luminaire heads on a base and as a wall-mounted version.

UNI II MINI
The MINI version [optionally 2,700 K or 3,000 K] is available with one [MINI II TILT] or two [MINI II DOUBLE] luminaire heads and is suitable for particularly discreet use in small rooms.

UNI II MAX
THE MAX version [3,000 K] with its 2,410 lumens also makes a big impression on its own.

UNI II
TRACK SPOT
Whether private [1-phase] or commercial [3-phase]: As a track spotlight, the UNI II can be aligned even more flexibly in the room. Available as a standard version [UNI II TILT] and as a MINI version [MINI II TILT].

UNI II
RECESSED LIGHT
The rotatable and swivelling luminaire head of the UNI II recessed luminaire [also available as a MINI and MAX version] can be folded flush onto the base if required in order to shine vertically downwards like a ceiling spotlight.

VERSATILE ACCESSORIES

THE UNI II series offers numerous options to further individualise the light and appearance of the luminaires:

Reflectors
Interchangeable reflectors for narrower [24°] or wider [48°] light emission.

Lenses
Interchangeable lenses in clear/satin finish for a broader and/or softer light.

Honeycomb filter
Optional honeycomb filter to reduce glare.

Reflector rings
Interchangeable reflector rings [black, glossy black, gold, chrome[for customising the lighting effect.

Covers
Covers [white, black] as replacement or deliberate colour contrast when UNI II is opened.

Ra>90

UNI 2

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	103 mm	Rotation Angle	350 Degree
Ø	100 mm	Swivelling Angle	90 Degree
Power	12 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	14.5 mm		
Base Ø	96 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348124

Article	Housing Color		Luminous Flux	Price
348179	Black	WW	780 lm	**€ 144.95**
348124	White	WW	835 lm	**€ 144.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 3.60**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930334	Rear white cover for Uni II series		**€ 3.55**
930335	Rear black cover for Uni II series		**€ 2.95**
930336	White heat sink cover for Uni II series		**€ 3.55**
930337	Black heat sink cover for Uni II series		**€ 7.95**
930338	Reflector ring white for Uni II series		**€ 11.95**
930339	Reflector ring black for Uni II series		**€ 10.95**
930340	Reflector ring gold for Uni II series		**€ 10.95**
930341	Reflector ring chrome for Uni II series		**€ 10.95**

page 148 page 420

Ra>90

UNI 2 DOUBLE

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Length	212 mm	Light Beam Angle	36 Degree
Width	100 mm	Rotation Angle	350 Degree
Height	103 mm	Swivelling Angle	90 Degree
Power	20 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	212 mm		
Base Width	20 mm	CRI (Ra)	90
Base Height	14 mm		


348125

Article	Housing Color		Luminous Flux	Price
348175	Black	ww	1440 lm	**€ 259.95**
348125	White	ww	1730 lm	**€ 259.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 3.60**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930334	Rear white cover for Uni II series		**€ 3.55**
930335	Rear black cover for Uni II series		**€ 2.95**
930336	White heat sink cover for Uni II series		**€ 3.55**
930337	Black heat sink cover for Uni II series		**€ 7.95**
930338	Reflector ring white for Uni II series		**€ 11.95**
930339	Reflector ring black for Uni II series		**€ 10.95**
930340	Reflector ring gold for Uni II series		**€ 10.95**
930341	Reflector ring chrome for Uni II series		**€ 10.95**

page 148

page 420

Ra>90

UNI 2 TRIPLE

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	14.5 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	324 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	103 mm	Rotation Angle	350 Degree
Ø	100 mm	Swivelling Angle	90 Degree
Power	30 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	315 mm		
Base Width	25 mm	CRI (Ra)	90

Article	Housing Color		Luminous Flux	Price
348210	Black	ww	2150 lm	**€ 369.95**
348107	White	ww	2420 lm	**€ 369.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 3.60**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930334	Rear white cover for Uni II series		**€ 3.55**
930335	Rear black cover for Uni II series		**€ 2.95**
930336	White heat sink cover for Uni II series		**€ 3.55**
930337	Black heat sink cover for Uni II series		**€ 7.95**
930338	Reflector ring white for Uni II series		**€ 11.95**
930339	Reflector ring black for Uni II series		**€ 10.95**
930340	Reflector ring gold for Uni II series		**€ 10.95**
930341	Reflector ring chrome for Uni II series		**€ 10.95**

page 148

page 420

Ra>90

UNI 2 MINI

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Height	75 mm	Rotation Angle	350 Degree
Ø	91 mm	Swivelling Angle	90 Degree
Base Height	44 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Ø	75 mm		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes		



348122

Article	Housing Color	Colour Temperature	Luminous Flux	Power	EEI	Price
348234	Black	WW 2700 K	700 lm	11.3 W		**€ 129.95**
348233	White	WW 2700 K	730 lm	11.3 W		**€ 129.95**
348178	Black	WW 3000 K	540 lm	8.0 W	A G	**€ 119.95**
348122	White	WW 3000 K	630 lm	8.0 W	A G	**€ 119.95**

Accessories

930327	Rear black cover for Uni II Mini series	**€ 3.45**
930328	White heat sink cover for Uni II Mini series	**€ 3.55**
930329	Black heat sink cover for Uni II Mini series	**€ 2.95**
930330	Reflector ring white for Uni II Mini series	**€ 10.95**
930331	Reflector ring black for Uni II Mini series	**€ 10.95**
930332	Reflector ring gold for Uni II Mini series	**€ 10.95**
930333	Reflector ring chrome for Uni II Mini series	**€ 10.95**
930770	Reflector 24° for Uni II Mini series	**€ 10.95**
930771	Reflector 48° for Uni II Mini series	**€ 10.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

Ra>90

UNI 2 MINI DOUBLE

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	160 mm	Light Beam Angle	36 Degree
Width	75 mm	Rotation Angle	350 Degree
Height	91 mm	Swivelling Angle	90 Degree
Base Length	160 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Width	75 mm		
Base Height	44 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348123

Article	Housing Color	Colour Temperature	Luminous Flux	Power	EEI	Price
348236	Black	WW 2700 K	1300 lm	21.0 W		**€ 209.95**
348235	White	WW 2700 K	1400 lm	21.0 W		**€ 209.95**
348177	Black	WW 3000 K	1020 lm	15.0 W	A G	**€ 199.95**
348123	White	WW 3000 K	1210 lm	15.0 W	A G	**€ 199.95**

Accessories

930327	Rear black cover for Uni II Mini series		**€ 3.45**
930328	White heat sink cover for Uni II Mini series		**€ 3.55**
930329	Black heat sink cover for Uni II Mini series		**€ 2.95**
930330	Reflector ring white for Uni II Mini series		**€ 10.95**
930331	Reflector ring black for Uni II Mini series		**€ 10.95**
930332	Reflector ring gold for Uni II Mini series		**€ 10.95**
930333	Reflector ring chrome for Uni II Mini series		**€ 10.95**
930770	Reflector 24° for Uni II Mini series		**€ 10.95**
930771	Reflector 48° for Uni II Mini series		**€ 10.95**

Ra>90

UNI 2 MAX

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	128 mm	Rotation Angle	350 Degree
Ø	125 mm	Swivelling Angle	90 Degree
Power	32 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	62 mm		
Base Ø	125 mm	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC		



348127

Article	Housing Color		Luminous Flux	Price
348176	Black	WW	2730 lm	**€ 249.95**
348127	White	WW	2830 lm	**€ 249.95**

Accessories

930390	24° reflector for Uni II Max		**€ 10.95**
930391	36° reflector for Uni II Max		**€ 12.95**
930392	48° reflector for Uni II Max		**€ 10.95**
930393	Rear white cover for Uni II Max series		**€ 10.95**
930394	Rear black cover for Uni II Max series		**€ 10.95**
930395	White heat sink cover for Uni II Max series		**€ 10.95**
930396	Black heat sink cover for Uni II Max series		**€ 10.95**
930397	Reflector ring white for Uni II Max series		**€ 12.95**
930398	Reflector ring black for Uni II Max series		**€ 10.95**
930399	Reflector ring gold for Uni II Max series		**€ 14.95**

page 150

page 329

LUCEA CCT

- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**
- **Light colour adjustable in two steps**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Control	Leading-edge dimmer, Trailing-edge dimmer
Colour Temperature	3000/4000 K		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03
Light Beam Angle	36 Degree		



348153

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
348153	White	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 119.95**
348154	Black	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 119.95**
348155	White	WW NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 139.95**
348156	Black	WW NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 139.95**
348157	White	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 159.95**
348158	Black	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 159.95**
348159	White	WW NW	2700/2900 lm	211 mm	100 mm	30.0 W	**€ 179.95**
348160	Black	WW NW	2700/2900 lm	211 mm	100 mm	30.0 W	**€ 179.95**

IP20

Accessories for **348153**, **348154**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **348155**, **348156**, **348157**, **348158**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

Accessories for **348159**

930677	Door panel for Lucea 30/40 white	**€ 24.95**

Accessories for **348159**, **348160**

930682	Lens 24° for Lucea 30	**€ 15.95**
930684	Lens 60° for Lucea 30	**€ 15.95**
930762	Reflector ring for Lucea 30/40 white	**€ 6.95**
930763	Reflector ring for Lucea 30/40 black	**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold	**€ 6.95**

LUCEA TILT CCT

- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**
- **Light colour adjustable in two steps**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Swivelling Angle	90 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03
Light Beam Angle	36 Degree		
Rotation Angle	350 Degree		



348161

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
348161	White	WW NW	930/1000 lm	218 mm	65 mm	10.0 W	**€ 129.95**
348162	Black	WW NW	930/1000 lm	218 mm	65 mm	10.0 W	**€ 129.95**
348163	White	WW NW	1460/1500 lm	241 mm	85 mm	15.0 W	**€ 149.95**
348164	Black	WW NW	1460/1500 lm	241 mm	85 mm	15.0 W	**€ 149.95**
348165	White	WW NW	1930/2000 lm	241 mm	85 mm	20.0 W	**€ 169.95**
348166	Black	WW NW	1930/2000 lm	241 mm	85 mm	20.0 W	**€ 169.95**
348167	White	WW NW	2700/2900 lm	274 mm	100 mm	30.0 W	**€ 189.95**
348168	Black	WW NW	2700/2900 lm	274 mm	100 mm	30.0 W	**€ 189.95**

Accessories for **348161**, **348162**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **348163**, **348164**, **348165**, **348166**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930754	Door panel for Lucea 15/20 white	**€ 23.95**
930755	Door panel for Lucea 15/20 black	**€ 23.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

Accessories for **348167**, **348168**

930677	Door panel for Lucea 30/40 white	**€ 24.95**
930678	Door panel for Lucea 30/40 black	**€ 24.95**
930682	Lens 24° for Lucea 30	**€ 15.95**
930684	Lens 60° for Lucea 30	**€ 15.95**
930762	Reflector ring for Lucea 30/40 white	**€ 6.95**
930763	Reflector ring for Lucea 30/40 black	**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold	**€ 6.95**

page 42

page 432

page 436

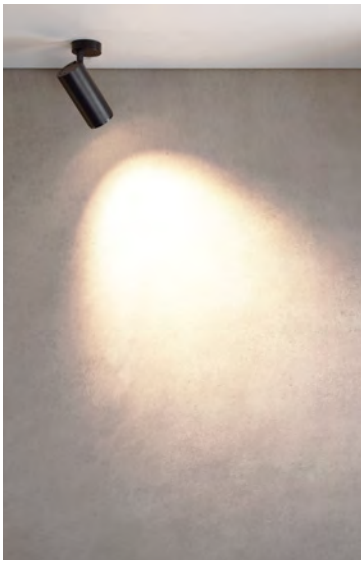

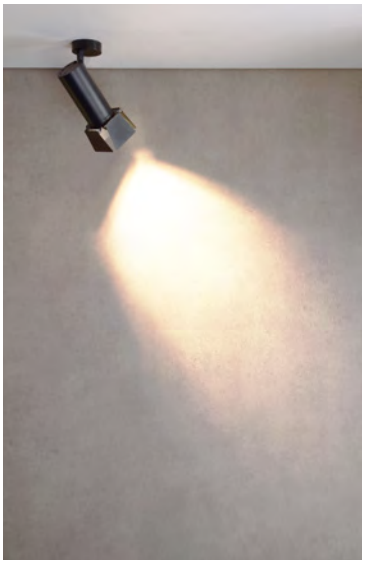

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Ra>90 SDCM<3 UGR<16

LUCEA

- **High colour rendering**
- **Light colour adjustable in 2 stages**
- **Housing made from die-cast aluminium**
- **Dimmable**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	2700 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	157 mm	CRI (Ra)	90
Ø	65 mm	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Power	Price
348213	White	WW	800 lm	6.0 W	**€ 119.95**
348214	Black	WW	800 lm	6.0 W	**€ 119.95**
348215	White	WW	1300 lm	10.0 W	**€ 129.95**
348216	Black	WW	1300 lm	10.0 W	**€ 129.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 44 page 332 page 333

Ra>90 SDCM<3 UGR<16

LUCEA TILT

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	2700 K	Rotation Angle	350 Degree
Height	157 mm	Swivelling Angle	90 Degree
Ø	65 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Height	29 mm	CRI (Ra)	90
Base Ø	103.5 mm	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Power	Price
348223	White	WW	800 lm	6.0 W	**€ 119.95**
348224	Black	WW	800 lm	6.0 W	**€ 119.95**
348225	White	WW	1300 lm	10.0 W	**€ 129.95**
348226	Black	WW	1300 lm	10.0 W	**€ 129.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 44 page 332 page 333

LUCEA DTW

- **Dim-to-warm 1,800K-2,700K**
- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	1800-2700 K	Light Beam Angle	36 Degree
Luminous Flux	750 lm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	157 mm	CRI (Ra)	90
Ø	65 mm	IK Protection Class	IK03
Power	10 W		
Rated Input Voltage	200-240 V/AC		

Article	Housing Color		Price
348237	White	WW	**€ 129.95**
348238	Black	WW	**€ 129.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 42

page 432

page 436

LUCEA DTW TILT

- **Dim-to-warm 1,800K-2,700K**
- **Incl. black reflector ring**
- **Comprehensive range of accessories for customisation**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	1800-2700 K	Rotation Angle	350 Degree
Luminous Flux	750 lm	Swivelling Angle	90 Degree
Height	218 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm	CRI (Ra)	90
Power	10 W	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes		

Article	Housing Color		Price
348239	White	WW	**€ 129.95**
348240	Black	WW	**€ 129.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white		**€ 22.95**
930753	Door panel for Lucea 6/10 black		**€ 22.95**
930756	Reflector ring for Lucea 6/10 white		**€ 4.95**
930757	Reflector ring for Lucea 6/10 black		**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold		**€ 4.95**

page 42

page 432

page 436

NEW

CAN IP20

- **Can be customised with a wide range of accessories**
- **Replaceable light source to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Price
348241	White	**€ 29.95**
348242	Black	**€ 29.95**

GU10 | IP20

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

NEW

IP44

CAN IP44

- **Customised lighting solution thanks to replaceable light source**
- **Can be combined with the extensive product family of the CAN series**
- **Suitable for damp rooms**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC, Hotel bathrooms / commercial wet areas

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Price
348243	White	**€ 34.95**
348244	Black	**€ 34.95**

GU10 | IP44

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**

page 46 page 202 page 222 page 223 page 414 page 507

CAN TILT SQUARE

The square CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.

NEW

CAN TILT SQUARE

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	125 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Width	90 mm	Rotation Angle	350 Degree
Base Height	15 mm	Swivelling Angle	90 Degree

Article	Housing Color	Base Length	Max. Power	Price
348245	White	110 mm	1x max. 7.5 W	**€ 44.95**
348246	Black	110 mm	1x max. 7.5 W	**€ 44.95**
348247	White	305 mm	2x max. 7.5 W	**€ 84.95**
348248	Black	305 mm	2x max. 7.5 W	**€ 84.95**
348249	White	480 mm	3x max. 7.5 W	**€ 119.95**
348250	Black	480 mm	3x max. 7.5 W	**€ 119.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

Page 46 Page 202 Page 222 Page 223 Page 414 Page 507

CAN TILT ROUND

The round CAN surface-mounted ceiling light provides a flexible lighting solution for commercial and private spaces. Available as a one-, two- and three-luminaire variant in the colours black and white, it enables precise alignment of the light using rotating and swivelling luminous elements. The widely used GU10 base enables quick and simple replacement of the lamp, while the screw-on cylinder housing enables tool-free access. Installation for rigid and flexible conductors is easy and efficient due to the integrated push terminals. The CAN surface-mounted ceiling light is part of a versatile series, which also contains pendant, wall, reading and outdoor lights.

NEW

CAN TILT ROUND

- **Flat and discreet lamp base**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be customised with a wide range of accessories**
- **Can be combined with the comprehensive CAN series product family**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Control	Dimmable via optional light source
Height	125 mm	Rotation Angle	350 Degree
Ø	60 mm	Swivelling Angle	90 Degree
Base Height	15 mm		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Base Ø	Max. Power	Price
348251	White	80 mm	1x max. 7.5 W	**€ 44.95**
348252	Black	80 mm	1x max. 7.5 W	**€ 44.95**
348253	White	200 mm	2x max. 7.5 W	**€ 84.95**
348254	Black	200 mm	2x max. 7.5 W	**€ 84.95**
348255	White	250 mm	3x max. 7.5 W	**€ 119.95**
348256	Black	250 mm	3x max. 7.5 W	**€ 119.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

Page 46 Page 202 Page 222 Page 223 Page 414 Page 507

CAN TILT SQUARE BASE MIX'N MATCH 1/3

- **flat and discreet luminaire base**
- **can be customised with cylinder housing in 6 different colours**

Housing	Aluminium	Control	Dimmable via optional light source
Height	58 mm		
Base Width	90 mm	Rotation Angle	350 Degree
Base Height	15 mm	Swivelling Angle	90 Degree
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Base Length	Max. Power	Price
348264	White	110 mm	1x max. 7.5 W	**€ 36.95**
348265	Black	110 mm	1x max. 7.5 W	**€ 36.95**
348266	White	305 mm	2x max. 7.5 W	**€ 69.95**
348267	Black	305 mm	2x max. 7.5 W	**€ 69.95**
348268	White	480 mm	3x max. 7.5 W	**€ 99.95**
348269	Black	480 mm	3x max. 7.5 W	**€ 99.95**

GU10 | IP20

CAN TILT ROUND BASE MIX'N MATCH 1/3

Housing	Aluminium	Control	Dimmable via optional light source
Height	58 mm		
Base Height	15 mm	Rotation Angle	350 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Base Ø	Max. Power	Price
348272	White	20 mm	2x max. 7.5 W	**€ 68.95**
348273	Black	20 mm	2x max. 7.5 W	**€ 68.95**
348274	White	25 mm	3x max. 7.5 W	**€ 99.95**
348275	Black	25 mm	3x max. 7.5 W	**€ 99.95**
348270	White	80 mm	1x max. 7.5 W	**€ 36.95**
348271	Black	80 mm	1x max. 7.5 W	**€ 36.95**

GU10 | IP20

CYLINDER HOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 7.95**
931054	Black	**€ 7.95**
931055	Bronze	**€ 18.95**
931056	Brass	**€ 18.95**
931057	Black gray	**€ 18.95**
931058	Rosé	**€ 18.95**

IP20

REFLECTOR RING CAN SERIES MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 4.95**
930302	Black	**€ 4.95**
930303	Gold	**€ 4.95**
930366	Silver	**€ 4.95**

IP20



BENGALA

- **Exchangeable lamp**
- **Can be rotated and swivelled**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Control	Dimmable via optional light source
Height	120 mm	Swivelling Angle	30 Degree
Max. Power	1x max. 50 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Length	Width	Ø	Base Length	Base Width	Price
122416	Silver			96 mm			**€ 44.95**
348022	Black			96 mm			**€ 44.95**
348023	White			96 mm			**€ 44.95**
122417	Silver	96 mm	96 mm		96 mm	96 mm	**€ 44.95**
348024	Black	96 mm	96 mm		96 mm	96 mm	**€ 44.95**
348025	White	96 mm	96 mm		96 mm	96 mm	**€ 44.95**

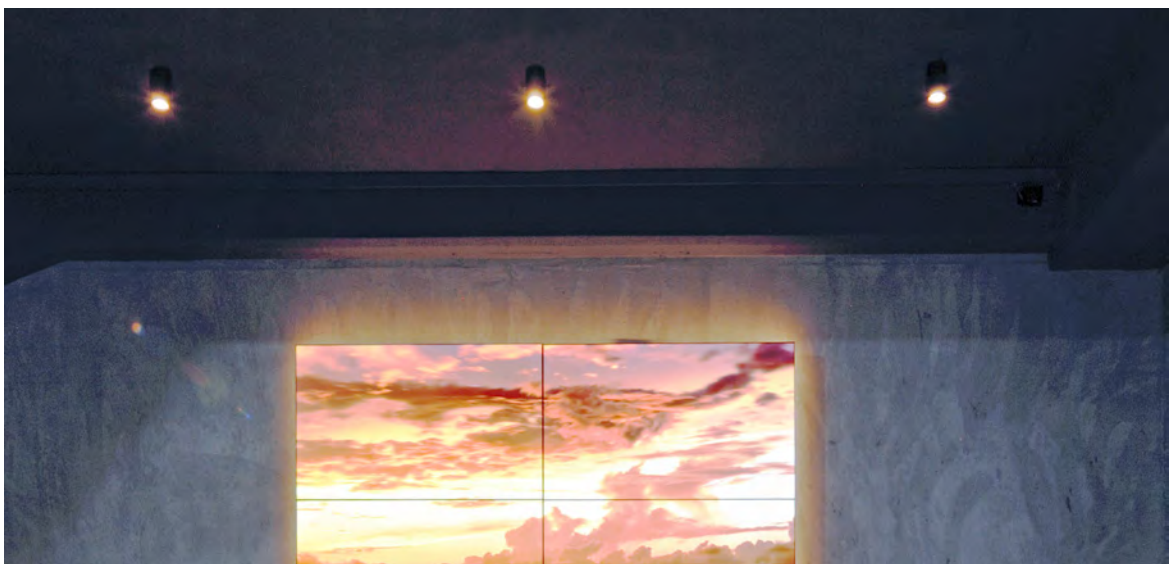

MONA

- **Exchangeable lamp**
- **Can be rotated and swivelled**

Housing	Aluminium	Control	Dimmable via optional light source
Width	93 mm		
Height	120 mm	Swivelling Angle	45 Degree
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Length	Max. Power	Price
348001	White	93 mm	1x max. 50.0 W	**€ 61.95**
348002	Black	93 mm	1x max. 50.0 W	**€ 61.95**
348004	White	186 mm	2x max. 50.0 W	**€ 114.95**
348005	Black	186 mm	2x max. 50.0 W	**€ 114.95**

PRO OFFICE SANO

PRO OFFICE SANO series ceiling lights are an efficient solution for renovating and modernising old T5/T8 louver lights. Due to slightly larger dimensions, the lights cover the old installations and so do not require the ceiling to be repainted.
Arrestor cables, plug connectors and mounting brackets make installation so easy that it can be performed by one person. In addition to ease of installation, the series offers impressive technical highlights: It provides flexible light control via CCT switch (3,000 K / 3,500 K / 4,000 K), dimmable variants (leading-edge/trailing-edge or DALI) and output adjustment in four stages (TRIAC variants only). They are also eligible for BEG German federal funding for energy-efficient buildings and emergency power capable (176-280 V/DC EOFI: 95 %).

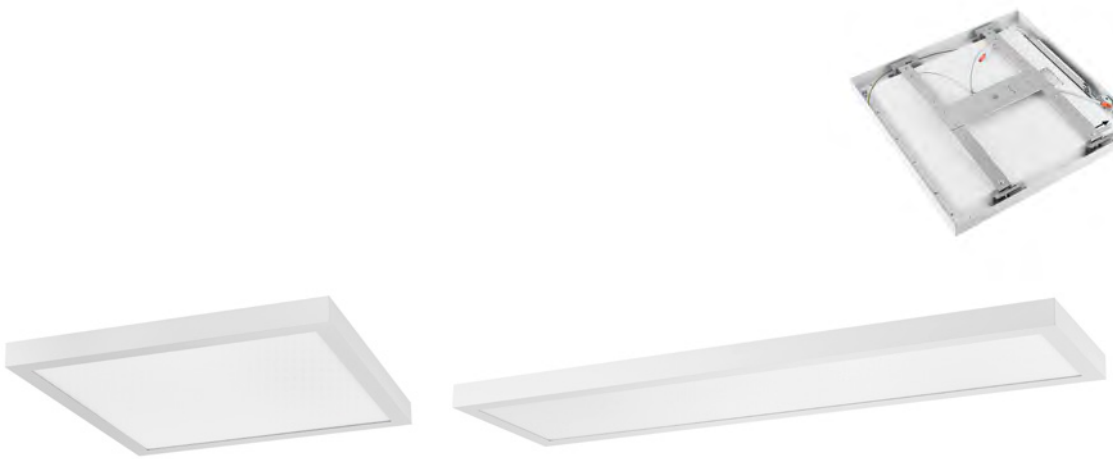

PRO OFFICE SANO

- **Renovation solution for T5/T8 louver lights**
- **Uniform illumination**
- **Covers the old installation, therefore no repainting necessary**
- **Easy to install due to plug connector, arrestor cables and mounting bracket**
- **Light colour adjustable in three levels**
- **Output adjustable in four levels [TRIAC variants only]**
- **Microprismatic surface structure**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [176-280 V/DC EOFI: 95 %]**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65<=3,000 cd/m²]**

Application Area
Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Stainless steel	Power Supply Unit incl.	Yes
		Light Beam Angle	90 Degree
Colour Temperature	3000/3500/4000 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Height	48 mm		
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90



348258

Article	Housing Color		Luminous Flux	Length	Width	Power Selectable	EEI	Price
348258	White	WW NW	4200/4500/4400 lm	625 mm	625 mm	27,0 / 30,0 / 33,0 / 35,0 W	E	**€ 189.95**
348259	White	WW NW	4350/4600/4500 lm	1225 mm	325 mm	27,0 / 30,0 / 32,0 / 35,0 W	F	**€ 209.95**
348260	White	WW NW	5200/5500/5400 lm	1525 mm	325 mm	32,0 / 35,5 / 38,0 / 42,0 W	E	**€ 229.95**

IP40 EL

THE HOUSE THAT
PINTEREST
BUILT

PRO OFFICE SANO DALI

- **Renovation solution for T5/T8 louver lights**
- **uniform illumination**
- **Covers the old installation, therefore no repainting necessary**
- **Easy to install due to plug connector, arrestor cables and mounting bracket**
- **Light colour adjustable in three levels**
- **Output adjustable in four levels [TRIAC variants only]**
- **Microprismatic surface structure**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [176-280 V/DC EOFI: 95 %]**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65 [L65<=3,000 cd/m²]**

Application Area
Office / conference, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Stainless steel	Power Supply Unit incl.	Yes
		Light Beam Angle	90 Degree
Colour Temperature	3000/3500/4000 K	Control	DALI 2 / DT6, Intelli Push-Dim
Height	48 mm		
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90



348261

Article	Housing Color		Luminous Flux	Length	Width	Power	Price
348262	☐ White	WW NW	4200/4500/4400 lm	1225 mm	325 mm	34.0 W	**€ 239.95**
348261	☐ White	WW NW	4400/4700/4600 lm	625 mm	625 mm	35.0 W	**€ 219.95**
348263	☐ White	WW NW	5300/5600/5500 lm	1525 mm	325 mm	42.0 W	**€ 259.95**

IP40 EL A G F

DRACONIS

The DRACONIS series from DEKO-LIGHT allows flexible ceiling lighting for a variety of applications in the areas of industry, trade and logistics. With the DRACONIS light for optional use as a surface-mounted ceiling light or in a 3-phase track system, the power [45, 55 or 72 W] and light colour [2,700, 3,500 or 4,000 K] can be flexibly adjusted using a switch on the back of the housing. To be able to integrate the DRACONIS into almost any environment, we offer several lenses for asymmetrical or symmetrical lighting in different light emission angles. The maximum luminous flux is 8,215 lumens.

luminous flux at 2700 K: 72 W = 7330 lm / 55 W = 6000 lm / 45 W = 5030 lm
luminous flux at 3500 K: 72 W = 8210 lm / 55 W = 6590 lm / 45 W = 5560 lm
luminous flux at 4000 K: 72 W = 8250 lm / 55 W = 6950 lm / 45 W = 5700 lm

page 400

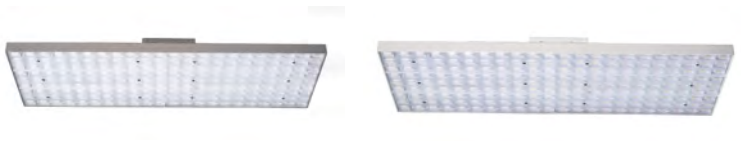

DRACONIS

- **Output adjustable in three stages**
- **Light colour adjustable in three stages**
- **High luminous flux**
- **Replaceable lenses**

Application Area
Office / conference, Home / Living

Housing	Aluminium	Base Length	102 mm
Colour Temperature	2700/3500/4000 K	Base Width	88 mm
Luminous Flux	7330/8210/8250 lm	Base Height	25 mm
Length	577.6 mm	Rated Input Voltage	220-240 V/AC
Width	188.6 mm	Power Supply Unit incl.	Yes
Height	71 mm	Light Beam Angle	60 Degree
Power Selectable	45 W, 55 W, 72 W	CRI (Ra)	80

Article	Housing Color		Price
348099	Light gray	WW NW	**€ 279.95**
348128	White	WW NW	**€ 279.95**

IP20 | A ↑ G | E

Accessories

930544	20° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930545	30° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930546	90° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930577	15° lens for surface-mounted ceiling lamp Draconis, asymmetrical	**€ 9.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

built in ceiling lights

page 106

page 107

page 108

page 109

page 111

page 116

page 122

page 123

page 124

page 126

page 129

page 131

page 146

page 148

page 152

NEW

SAMSOLA ROUND

- **Suitable for GU10/GU5.3 sockets [sold separately]**
- **Lamps are easy to install due to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Metal	Control	Dimmable via optional light source
Height	23 mm	Swivelling Angle	30 Degree
Installation Depth	100 mm		
Cut Out Ø	68 mm		

Article	Housing Color	Surface	Ø	Price
110040	Silver	Brushed	82 mm	**€ 9.95**
110038	Copper	Brushed	95 mm	**€ 9.95**
110039	White	Matt	82 mm	**€ 9.95**
110042	Aluminium	Matt	82 mm	**€ 9.95**
110043	Black	Matt	82 mm	**€ 9.95**
110041	Silver	Shiny	82 mm	**€ 9.95**

Accessories

100204	Socket GU10 with spacer		**€ 3.95**
100200	Socket GU5.3 with 15 cm cable		**€ 0.95**
829063	Safety spacer		**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

NEW

SAMSOLA SQUARE

- **Suitable for GU10/GU5.3 sockets [sold separately]**
- **Lamps are easy to install due to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Metal	Cut Out Ø	68 mm
Length	85 mm	Control	Dimmable via optional light source
Width	85 mm		
Height	23 mm	Swivelling Angle	30 Degree
Installation Depth	100 mm		

Article	Housing Color	Surface	Price
110044	Copper	Brushed	**€ 9.95**
110046	Silver	Brushed	**€ 9.95**
110045	White	Matt	**€ 9.95**
110048	Aluminium	Matt	**€ 9.95**
110049	Black	Matt	**€ 9.95**
110047	Silver	Shiny	**€ 9.95**

Accessories

100204	Socket GU10 with spacer		**€ 3.95**
100200	Socket GU5.3 with 15 cm cable		**€ 0.95**
829063	Safety spacer		**€ 3.95**
930972	Reducing ring square 130/70 mm, Traffic white		**€ 9.95**
931048	Reducing ring square 130/70 mm, Signal white		**€ 9.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

NEW

SAMSOLA MAX ROUND

- **Suitable for GU10 / GU5.3 sockets [sold separately]**
- **Easy installation of the light sources thanks to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68-80 mm
Height	23 mm	Control	Dimmable via optional light source
Ø	95 mm		
Installation Depth	100 mm	Swivelling Angle	30 Degree

Article	Housing Color	Surface	Price
110050	Copper	Brushed	**€ 11.95**
110051	White	Brushed	**€ 11.95**
110052	Silver	Brushed	**€ 11.95**
110054	Aluminium	Matt	**€ 11.95**
110055	Black	Matt	**€ 11.95**
110053	Silver	Shiny	**€ 11.95**

Accessories

100204	Socket GU10 with spacer		**€ 3.95**
100200	Socket GU5.3 with 15 cm cable		**€ .95**
829063	Safety spacer		**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

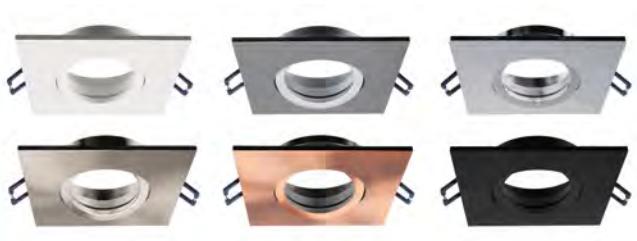

NEW

SAMSOLA MAX SQUARE

- **Suitable for GU10 / GU5.3 sockets [sold separately]**
- **Easy installation of the light sources thanks to click lock**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Cut Out Ø	68-80 mm
Length	95 mm	Control	Dimmable via optional light source
Width	95 mm		
Height	23 mm	Swivelling Angle	30 Degree
Installation Depth	100 mm		

Article	Housing Color	Surface	Price
110056	Copper	Brushed	**€ 11.95**
110058	Silver	Brushed	**€ 11.95**
110057	White	Matt	**€ 11.95**
110060	Aluminium	Matt	**€ 11.95**
110061	Black	Matt	**€ 11.95**
110059	Silver	Shiny	**€ 11.95**



Accessories

100204	Socket GU10 with spacer		**€ 3.95**
100200	Socket GU5.3 with 15 cm cable		**€ .95**
829063	Safety spacer		**€ 3.95**
930972	Reducing ring square 130/70 mm, Traffic white		**€ 9.95**
931048	Reducing ring square 130/70 mm, Signal white		**€ 9.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

CAN

The CAN series is available in numerous versions: as a pendant, ceiling, wall, reading, track, outdoor or - as shown here - recessed ceiling light. This means that the CAN feels at home almost anywhere: in living rooms, hotel rooms, restaurants and many other areas of application.

A wide range of accessory components means that each luminaire can be individually adapted. Discover the diversity of the CAN series with us - also for your next project.

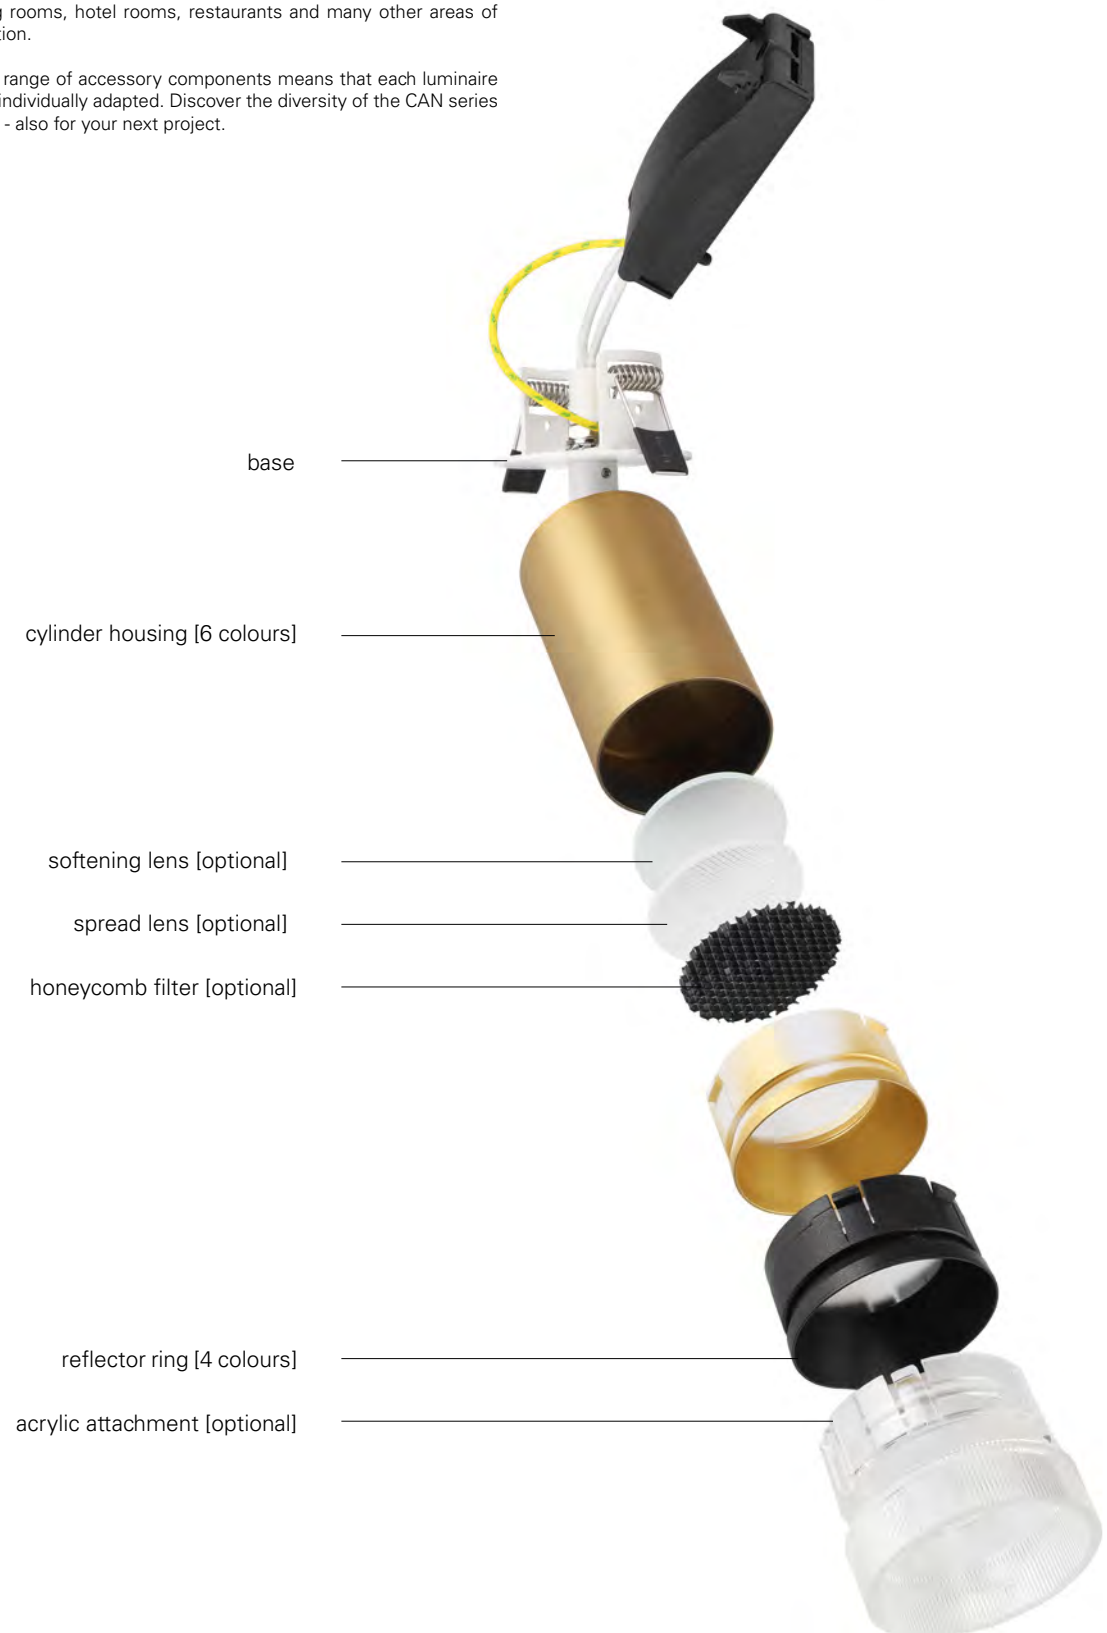

CAN ROUND

- **customised lighting solution thanks to replaceable light source**
- **can be customised with cylinder housing in 5 different colours**
- **can be combined with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Cut Out Ø	51 mm
Height	98 mm	Control	Dimmable via optional light source
Ø	60 mm		
Installation Depth	40 mm	Rotation Angle	350 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Length	Sockets	Max. Power	Cut Out Length	Price
565755	White		1 PCS	1x max. 7.5 W		**€ 33.95**
565756	Black		1 PCS	1x max. 7.5 W		**€ 33.95**
565757	White	160 mm	2 PCS	2x max. 7.5 W	100 mm	**€ 69.95**
565758	Black	160 mm	2 PCS	2x max. 7.5 W	100 mm	**€ 69.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

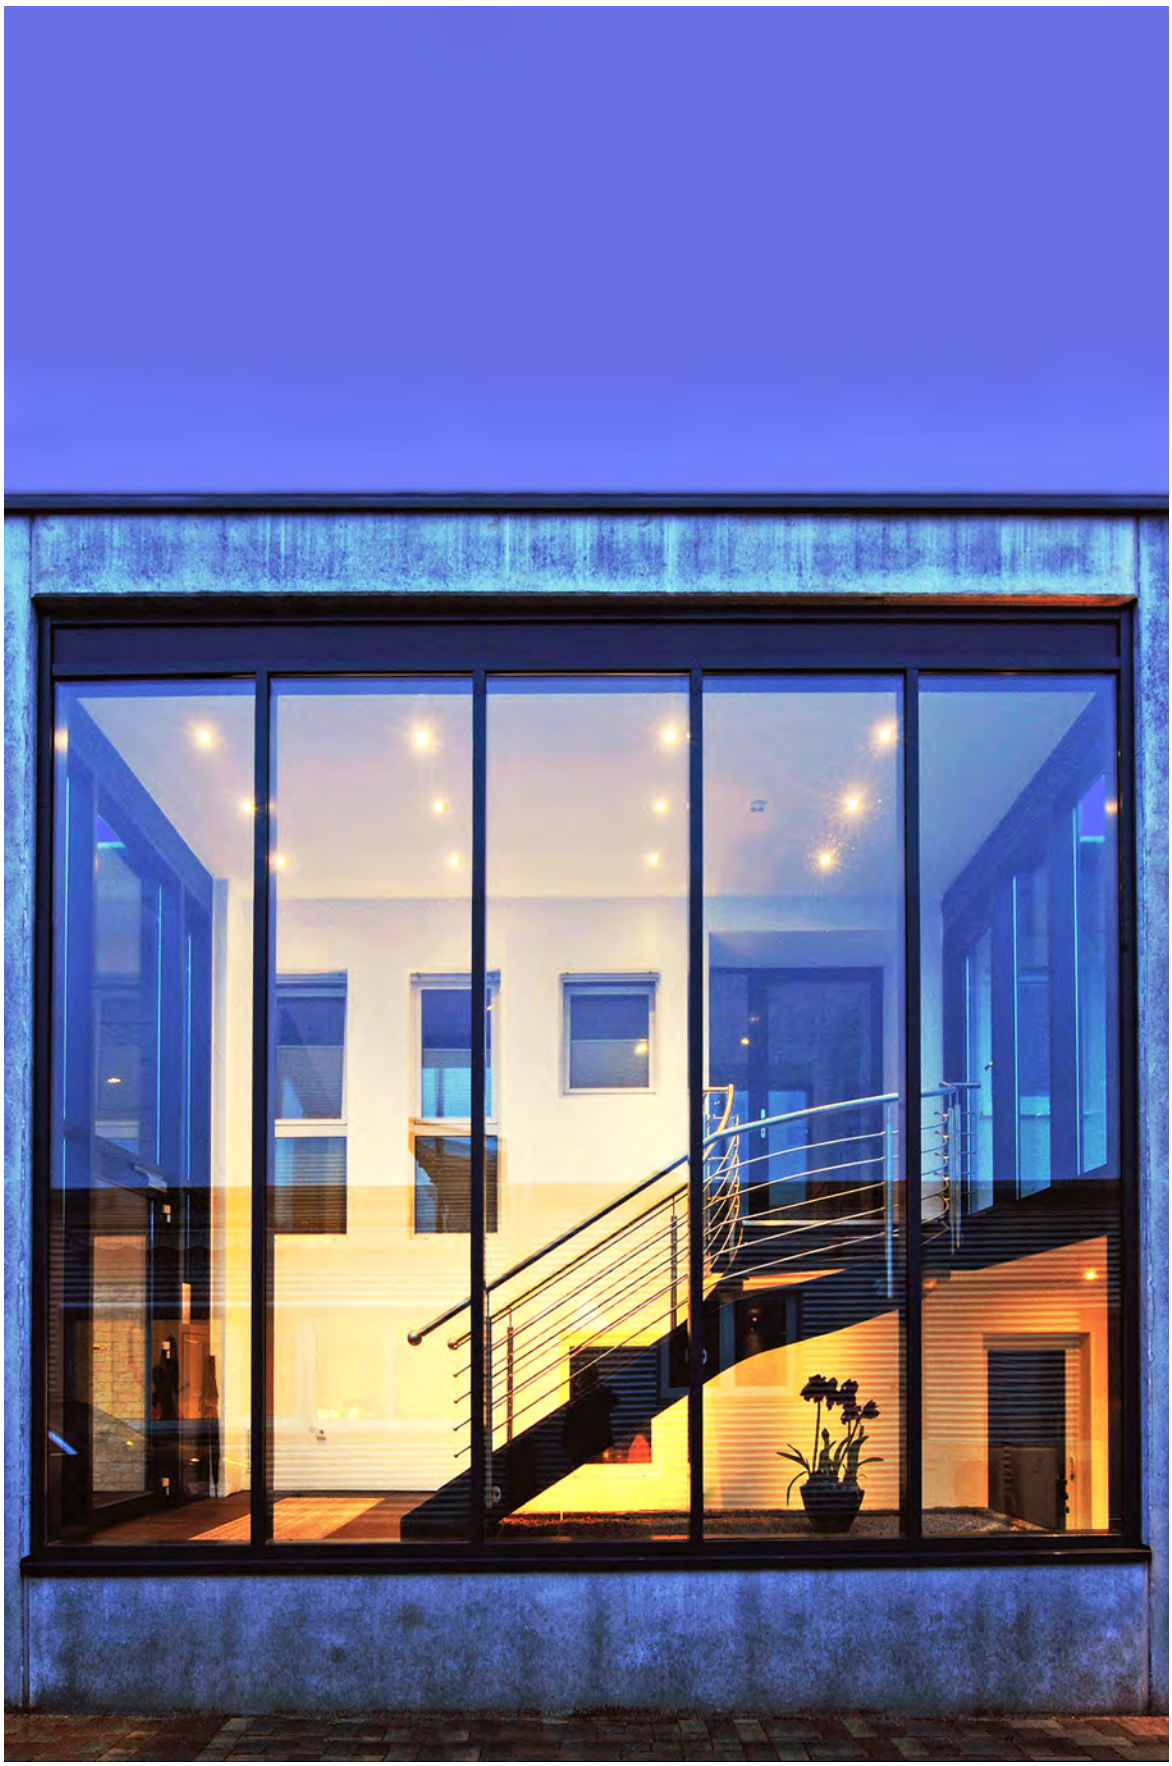

NEW

REDUCING RINGS FOR RECESSED LIGHTS

- **Renovation solution for excessively large ceiling cut-outs**
- **Flexible adaptation to ceiling cut-outs**
- **suitable for 3-30 mm thick hollow ceilings**
- **toolless installation possible**

Housing Metal Height 1.5 mm

Article	Housing Color	Length	Width	Ø	Cut Out Ø	Inner diameter	Price
930967	☐ White			130 mm	95 mm	70 mm	**€ 9.95**
931043	☐ White			130 mm	95 mm	70 mm	**€ 9.95**
930968	☐ White			155 mm	120 mm	95 mm	**€ 11.95**
931044	☐ White			155 mm	120 mm	95 mm	**€ 11.95**
930969	☐ White			210 mm	175 mm	135 mm	**€ 13.95**
931045	☐ White			210 mm	175 mm	135 mm	**€ 13.95**
930970	☐ White			240 mm	205 mm	180 mm	**€ 17.95**
931046	☐ White			240 mm	205 mm	180 mm	**€ 17.95**
930971	☐ White			280 mm	245 mm	210 mm	**€ 23.95**
931047	☐ White			280 mm	245 mm	210 mm	**€ 23.95**
930972	☐ White	130 mm	130 mm		95 mm	70 mm	**€ 9.95**
931048	☐ White	130 mm	130 mm		95 mm	70 mm	**€ 9.95**
930973	☐ White	155 mm	155 mm		120 mm	95 mm	**€ 11.95**
931049	☐ White	155 mm	155 mm		120 mm	95 mm	**€ 11.95**
930974	☐ White	210 mm	210 mm		175 mm	135 mm	**€ 13.95**
931050	☐ White	210 mm	210 mm		175 mm	135 mm	**€ 13.95**
930975	☐ White	240 mm	240 mm		205 mm	180 mm	**€ 17.95**
931051	☐ White	240 mm	240 mm		205 mm	180 mm	**€ 17.95**
930976	☐ White	280 mm	280 mm		245 mm	210 mm	**€ 23.95**
931052	☐ White	280 mm	280 mm		245 mm	210 mm	**€ 23.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

DIONE

The DIONE series comprises elegant recessed spotlights in aluminium housing with particularly shallow mounting depth - a real problem solver in the refurbishment sector.

The popular DIONE recessed ceiling luminaires with high-quality COB LED including reflector are housed in an aluminium casing and have a cut-out dimension of 68 mm. While the available colours white, silver, black, chrome and nickel harmonise with with almost any type of ceiling, the actual special feature of the DIONE is not visible when installed: The recessed spotlights are extremely space-saving when installed and require only 25 or 27 mm of ceiling cavity. This is where the power supply unit and the Quick connection box are located, which allows 3-pole through-wiring of several DIONE models as well as retrofitting as part of renovations.

The plug-in connector between the spotlight and the power supply unit allows installers to conveniently install the lighting equipment and connect the spotlight once the ceiling work has been completed.

The DIONE recessed spotlights are available in the light colours 2,700K, 3,000 K, 4,000 K and as a dim-to-warm version [1,800-3,000K]. In addition to the IP20 version, an IP44 version is also available, making the DIONE suitable for bathrooms and other damp areas indoors.

With this variety, the DIONE series offers recessed spotlights for a wide range of applications - from private homes and exhibition areas to guest areas in hotels and restaurants. Thanks to the wide selection of light colours and IP classes, the DIONE can be flexibly integrated into any environment and covers all design requirements, from a feel-good character to functional lighting.

only 25 or 27 mm ceiling cavity required

H x Ø: 41 x 82 mm [cut-out dimension 68 mm]

aluminium housing in white, silver, black, chrome and brushed nickel

reflector with 36° beam angle

high-quality COB technology with up to 800 lm

new connector between spot and power supply unit for even more convenient mounting

dimmable power supply unit

Quick connection box with quick-release fastener [optionally fixable with screw] for quick installation and through-wiring for flexible and rigid cables up to 1.5 mm^2 NYM

THAT'S HOW EASY IT IS

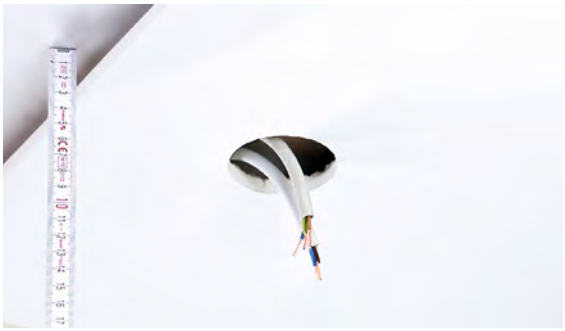

1 - Quick wiring / through-wiring on the Quick connection box due to screwless plug-in terminals

2 - quick connection box is placed over the 68 mm cut-out in the cavity

3 - compact power supply unit is inserted into the cavit

4 - connect the power supply unit to the spot using the connector

5 - inserting the spot into the ceiling cut-out

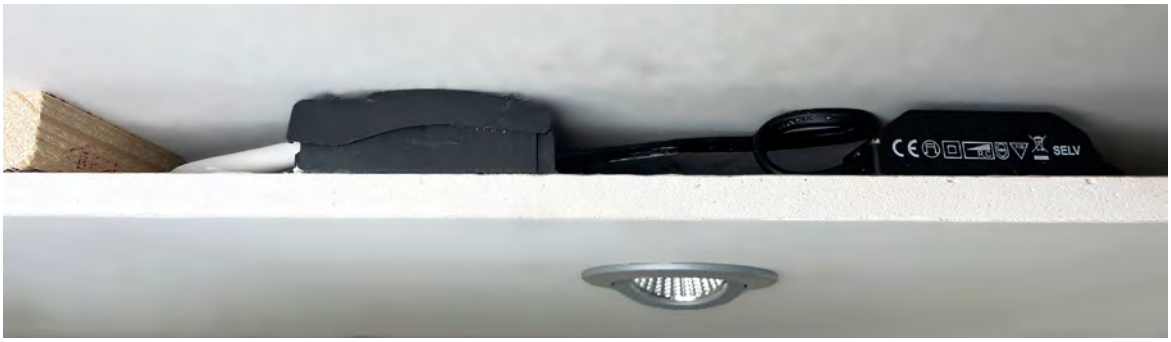

6 - The result: a compact installation with a swivelling spot, a dimmable power supply unit and the option of through-wiring in the ceiling cavity - ideal in refurbishment areas.

DIONE IP20

- **Low installation depth**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Required Installation Depth	25 mm
Height	41 mm	Light Beam Angle	36 Degree
Ø	82 mm	Swivelling Angle	30 Degree
Power	8.5 W	Cut Out Ø	68 mm
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Power Supply Unit incl.	Yes		
Installation Depth	38 mm		



565355

Article	Housing Color	Colour Temperature	Luminous Flux	CRI (Ra)	Price
565375	White	WW 2700 K	750 lm	81	**€ 59.95**
565376	Silver	WW 2700 K	750 lm	81	**€ 59.95**
565377	Black	WW 2700 K	750 lm	81	**€ 59.95**
565378	Nickel	WW 2700 K	750 lm	81	**€ 59.95**
565379	Chrome	WW 2700 K	750 lm	81	**€ 59.95**
565355	White	WW 3000 K	800 lm	81	**€ 59.95**
565356	Silver	WW 3000 K	800 lm	81	**€ 59.95**
565357	Black	WW 3000 K	800 lm	81	**€ 59.95**
565371	Nickel	WW 3000 K	800 lm	81	**€ 59.95**
565372	Chrome	WW 3000 K	800 lm	81	**€ 59.95**
565358	White	NW 4000 K	800 lm	84	**€ 59.95**
565359	Silver	NW 4000 K	800 lm	84	**€ 59.95**
565360	Black	NW 4000 K	800 lm	84	**€ 59.95**
565373	Nickel	NW 4000 K	800 lm	84	**€ 59.95**
565374	Chrome	NW 4000 K	800 lm	84	**€ 59.95**



Accessories

930863	60° reflector for Dione		**€ 5.95**
930864	Frosted diffusing lens for Dione		**€ 2.95**
829063	Safety spacer		**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

DIONE IP20 DTW

- **Low installation depth**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	38 mm
Colour Temperature	1800-3000 K	Required Installation Depth	25 mm
Luminous Flux	480 lm	Light Beam Angle	36 Degree
Height	41 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	8.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	95


565380

Article	Housing Color		Price
565380	White	ww	**€ 69.95**
565381	Silver	ww	**€ 69.95**
565382	Black	ww	**€ 69.95**
565383	Chrome	ww	**€ 69.95**
565384	Nickel	ww	**€ 69.95**

Accessories

930863	60° reflector for Dione	**€ 5.95**
930864	Frosted diffusing lens for Dione	**€ 2.95**
829063	Safety spacer	**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

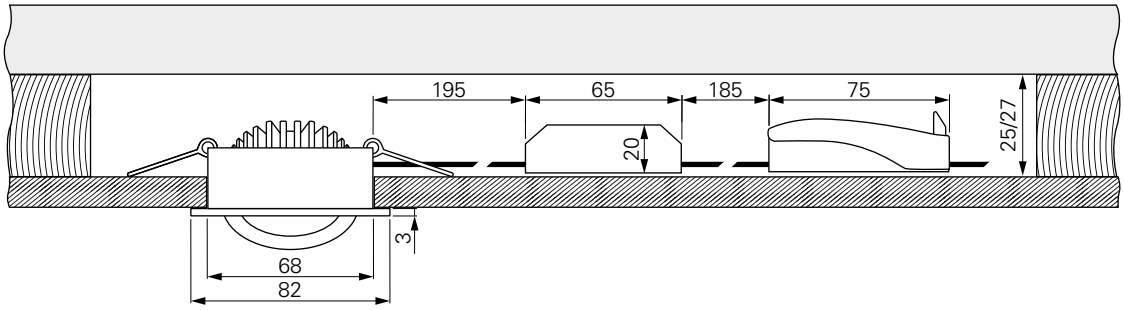

DIONE IP44

- **Low installation depth**
- **Splash-proof [downwards after installation]**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Required Installation Depth	27 mm
Height	44 m	Light Beam Angle	36 Degree
Ø	82 mm	Swivelling Angle	30 Degree
Power	8.5 W	Cut Out Ø	68 mm
Rated Input Voltage	220-240 V/AC	Control	Leading-edge dimmer, Trailing-edge dimmer
Power Supply Unit incl.	Yes		
Installation Depth	41 mm		



565388

Article	Housing Color	Colour Temperature	Luminous Flux	CRI (Ra)	Price
565388	White	WW 2700 K	750 lm	81	**€ 64.95**
565389	Silver	WW 2700 K	750 lm	81	**€ 64.95**
565390	Black	WW 2700 K	750 lm	81	**€ 64.95**
565391	Chrome	WW 2700 K	750 lm	81	**€ 64.95**
565392	Nickel	WW 2700 K	750 lm	81	**€ 64.95**
565393	White	WW 3000 K	800 lm	81	**€ 64.95**
565394	Silver	WW 3000 K	800 lm	81	**€ 64.95**
565395	Black	WW 3000 K	800 lm	81	**€ 64.95**
565396	Chrome	WW 3000 K	800 lm	81	**€ 64.95**
565397	Nickel	WW 3000 K	800 lm	81	**€ 64.95**
565398	White	NW 4000 K	800 lm	84	**€ 64.95**
565399	Silver	NW 4000 K	800 lm	84	**€ 64.95**
565400	Black	NW 4000 K	800 lm	84	**€ 64.95**
565401	Chrome	NW 4000 K	800 lm	84	**€ 64.95**
565402	Nickel	NW 4000 K	800 lm	84	**€ 64.95**



Accessories

930863	60° reflector for Dione		**€ 5.95**
930864	Frosted diffusing lens for Dione		**€ 2.95**
829063	Safety spacer		**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**



DIONE IP44 DTW

- **Low installation depth**
- **Splash-proof [downwards after installation]**
- **Incl. dimmable power supply unit and connection box**
- **Feed-through wiring possible**
- **Ideal renovation solution**
- **Light and power supply unit with intermediate connector**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Installation Depth	41 mm
Colour Temperature	1800-3000 K	Required Installation Depth	27 mm
Luminous Flux	480 lm	Light Beam Angle	36 Degree
Height	44 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	8.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	95
Power Supply Unit incl.	Yes		



565403

Article	Housing Color		Price
565403	White	ww	**€ 74.95**
565404	Silver	ww	**€ 74.95**
565405	Black	ww	**€ 74.95**
565406	Chrome	ww	**€ 74.95**
565407	Nickel	ww	**€ 74.95**



Accessories

930863	60° reflector for Dione	**€ 5.95**
930864	Frosted diffusing lens for Dione	**€ 2.95**
829063	Safety spacer	**€ 3.95**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

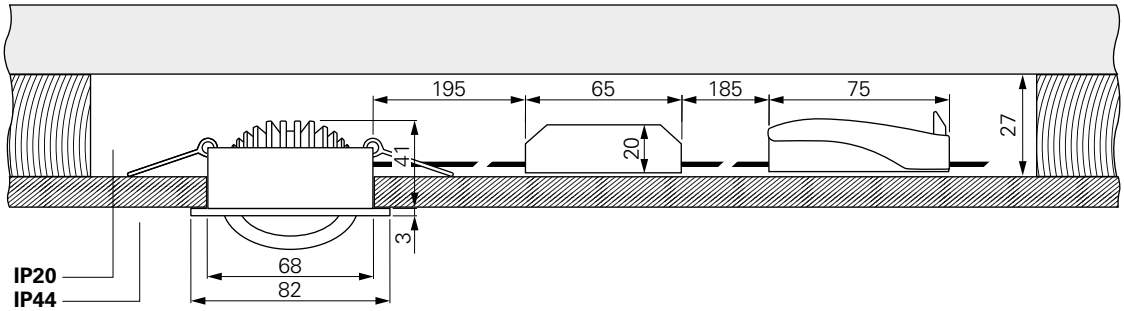

NEW IP44 Ra>90 RGBWW

DIONE, IP44, RGBW

- **Low installation depth**
- **splash-proof [downwards when installed**
- **suitable for 24V CV colour controls (e.g. RF-smart, Dali, DMX, Casambi, etc.)**
- **can be combined with all Dione recessed spotlights**
- **high-quality RGBW COB technology**
- **RGB 3x 3W, WW 1x 6W, max. possible total output 9W**
- **homogeneous colour mixing**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Installation Depth	41 mm
Colour Temperature	3000 K	Required Installation Depth	27 mm
Luminous Flux	540 lm	Light Beam Angle	36 Degree
Height	41 mm	Swivelling Angle	30 Degree
Ø	82 mm	Cut Out Ø	68 mm
Power	9 W	Control	Dimmable via optional controller
Rated Input Voltage	24 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No		

Article	Housing Color		Price
565450	White	RGB WW	**€ 74.95**
565451	Light gray	RGB WW	**€ 74.95**
565452	Black	RGB WW	**€ 74.95**
565453	Chrome	RGB WW	**€ 74.95**
565454	Nickel	RGB WW	**€ 74.95**

CV | IP20 | IP44 | 4 CH

Accessories

843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 99.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 94.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 94.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 114.95**
862234	FLAT, CV, UT 24 V/20 W	**€ 25.95**
862122	FLAT, CV, UT 24 V/50 W	**€ 52.95**
862126	LONG-FLAT, CV, LT-100-24	**€ 96.95**
930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

SURTUR

- **Integrated power supply unit**
- **through-wiring possible**
- **Light colour adjustable in 3 steps**
- **Very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Colour Temperature	2700/3000/4000 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	Accumulator/Battery Operated	No
Light Beam Angle	40 Degree	IK Protection Class	IK06
Swivelling Angle	30 Degree		
Cut Out Ø	68-75 mm		

Article	Housing Color		Luminous Flux	Housing	Height	Ø	Power	Price
565455	White	WW NW	520/600/510 lm	Polycarbonate	44 mm	85 mm	6.0 W	**€ 24.95**
565456	Black	WW NW	520/600/510 lm	Polycarbonate	44 mm	85 mm	6.0 W	**€ 24.95**
565457	White	WW NW	880/950/810 lm	Polycarbonate / PA - Polyamide	72 mm	105 mm	10.0 W	**€ 32.95**
565458	Black	WW NW	880/950/810 lm	Polycarbonate / PA - Polyamide	72 mm	105 mm	10.0 W	**€ 32.95**

IP20 IP44 A G F

Accessories for **565455**, **565456**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

Accessories for **565457**, **565458**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 11.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

NEW dtw IK06 IP44 Ra>90

SURTUR DTW

- **Integrated power supply unit**
- **Feed-through wiring possible**
- **Adjustable light colour - dim to warm**
- **Very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Colour Temperature	1800-2700 K	Control	Trailing-edge dimmer, Leading-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	Accumulator/Battery Operated	No
Light Beam Angle	40 Degree	IK Protection Class	IK06
Swivelling Angle	30 Degree		
Cut Out Ø	68-75 mm		

Article	Housing Color		Luminous Flux	Housing	Height	Ø	Power	Price
565459	White	ww	230/430 lm	Polycarbonate	44 mm	85 mm	6.0 W	**€ 28.95**
565460	Black	ww	230/430 lm	Polycarbonate	44 mm	85 mm	6.0 W	**€ 28.95**
565461	White	ww	360/720 lm	Polycarbonate / PA - Polyamide	72 mm	105 mm	10.0 W	**€ 36.95**
565462	Black	ww	360/720 lm	Polycarbonate / PA - Polyamide	72 mm	105 mm	10.0 W	**€ 36.95**



Accessories for **565459**, **565460**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

Accessories for **565461**, **565462**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 11.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

SMD-68-230V-ROUND

Plenty of power for less! SMD-68 series recessed lights deliver up to 550 lm and also have an integrated, dimmable power supply (230 V direct connection), which makes the use of GU10 holders and retrofitted equipment redundant.

SMD-68-230V-ROUND

- **Integrated power supply unit**
- **Swivel-mounted**
- **Low installation depth**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Plastic	Light Beam Angle	45 Degree
Height	43.8 mm	Swivelling Angle	36 Degree
Ø	85 mm	Cut Out Ø	68 mm
Power	6.5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes		
Installation Depth	41.3 mm		



565337

Article	Housing Color	Colour Temperature	Luminous Flux	EEI	Price
565337	White	WW 2700 K	510 lm	G	**€ 19.95**
565385	Black	WW 2700 K	510 lm	G	**€ 19.95**
565338	White	WW 3000 K	540 lm	F	**€ 19.95**
565386	Black	WW 3000 K	540 lm	F	**€ 19.95**
565339	White	NW 4000 K	550 lm	G	**€ 19.95**
565387	Black	NW 4000 K	550 lm	G	**€ 19.95**

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

COB 68 HCL

- **Suitable for 24 V HCL controllers**
- **Swivel-mounted**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	60 mm
Colour Temperature	2500-6500 K	Light Beam Angle	65 Degree
Luminous Flux	534 lm	Swivelling Angle	25 Degree
Height	46 mm	Cut Out Ø	68 mm
Ø	78 mm	Control	Dimmable via optional controller
Power	8 W		
Rated Input Voltage	24 V/DC	CRI (Ra)	80
Power Supply Unit incl.	No		

Article	Housing Color	Colour Temperature	Price
565193	White	WW CW 2500-6500 K	**€ 65.95**

CV | IP20 | III | 2 CH | A ↑ G | G

Accessories

829063	Safety spacer		**€ 3.95**
862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**
862168	BASIC, CV, Q8H-24-150 W		**€ 129.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

COB 95 HCL

- **suitable for 24V HCL control**
- **swivelling**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	70 mm
Colour Temperature	2500-6500 K	Light Beam Angle	65 Degree
Luminous Flux	1118 lm	Swivelling Angle	25 Degree
Height	65 mm	Cut Out Ø	95 mm
Ø	108 mm	Control	Dimmable via optional controller
Power	16 W	CRI (Ra)	80
Rated Input Voltage	24 V/DC		
Power Supply Unit incl.	No		

Article	Housing Color	Colour Temperature	Price
565194	White	WW CW 2500-6500 K	**€ 109.95**

CV | IP20 | III | 2 CH | A ↑ G | G

Accessories

829063	Safety spacer		**€ 3.95**
862233	FLAT, CV, UT 24 V/12 W		**€ 21.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 96.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**
930968	Reducing ring round 155/95 mm, Traffic white		**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white		**€ 11.95**

Ra>90

COB-68-350MA-2700K-SQUARE

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	45 Degree
Length	78 mm	Swivelling Angle	25 Degree
Width	78 mm	Cut Out Ø	68 mm
Height	46 mm	Control	Dimmable via optional power supply unit
Power	6 W	CRI (Ra)	90
Rated Input Voltage	16-17 V/DC	Rated Current	350 mA
Power Supply Unit incl.	No		
Installation Depth	50 mm		



565282

Article	Housing Color	Colour Temperature	Luminous Flux	EEI	Price
565282	Silver	WW 2700 K	580 lm	E	**€ 59.95**
565283	White	WW 2700 K	580 lm	E	**€ 59.95**
565284	Silver	NW 4000 K	660 lm	D	**€ 59.95**
565285	White	NW 4000 K	660 lm	E	**€ 59.95**

Accessories

829063	Safety spacer		**€ 3.95**
180512	BASIC, CC, CC35018/18 W		**€ 23.95**
862202	BASIC, DIM, CC, D35009UF/9 W		**€ 28.95**
930972	Reducing ring square 130/70 mm, Traffic white		**€ 9.95**
931048	Reducing ring square 130/70 mm, Signal white		**€ 9.95**

RGBWW

COB 95 RGBW

- **Suitable for 24 V colour controller**
- **Swivel-mounted**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	68 mm
Colour Temperature	3000 K	Light Beam Angle	60 Degree
Luminous Flux	710 lm	Swivelling Angle	25 Degree
Height	70 mm	Cut Out Ø	95 mm
Ø	110 mm	Control	Dimmable via optional controller
Power	16 W		
Rated Input Voltage	24 V/DC	CRI (Ra)	80
Power Supply Unit incl.	No		

Article	Housing Color		Price
565245	White	RGB WW	**€ 129.95**
565246	Silver	RGB WW	**€ 129.95**

CV | IP20 | 4 CH | A ↑ G | G

Accessories

862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 96.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**
930968	Reducing ring round 155/95 mm, Traffic white		**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white		**€ 11.95**

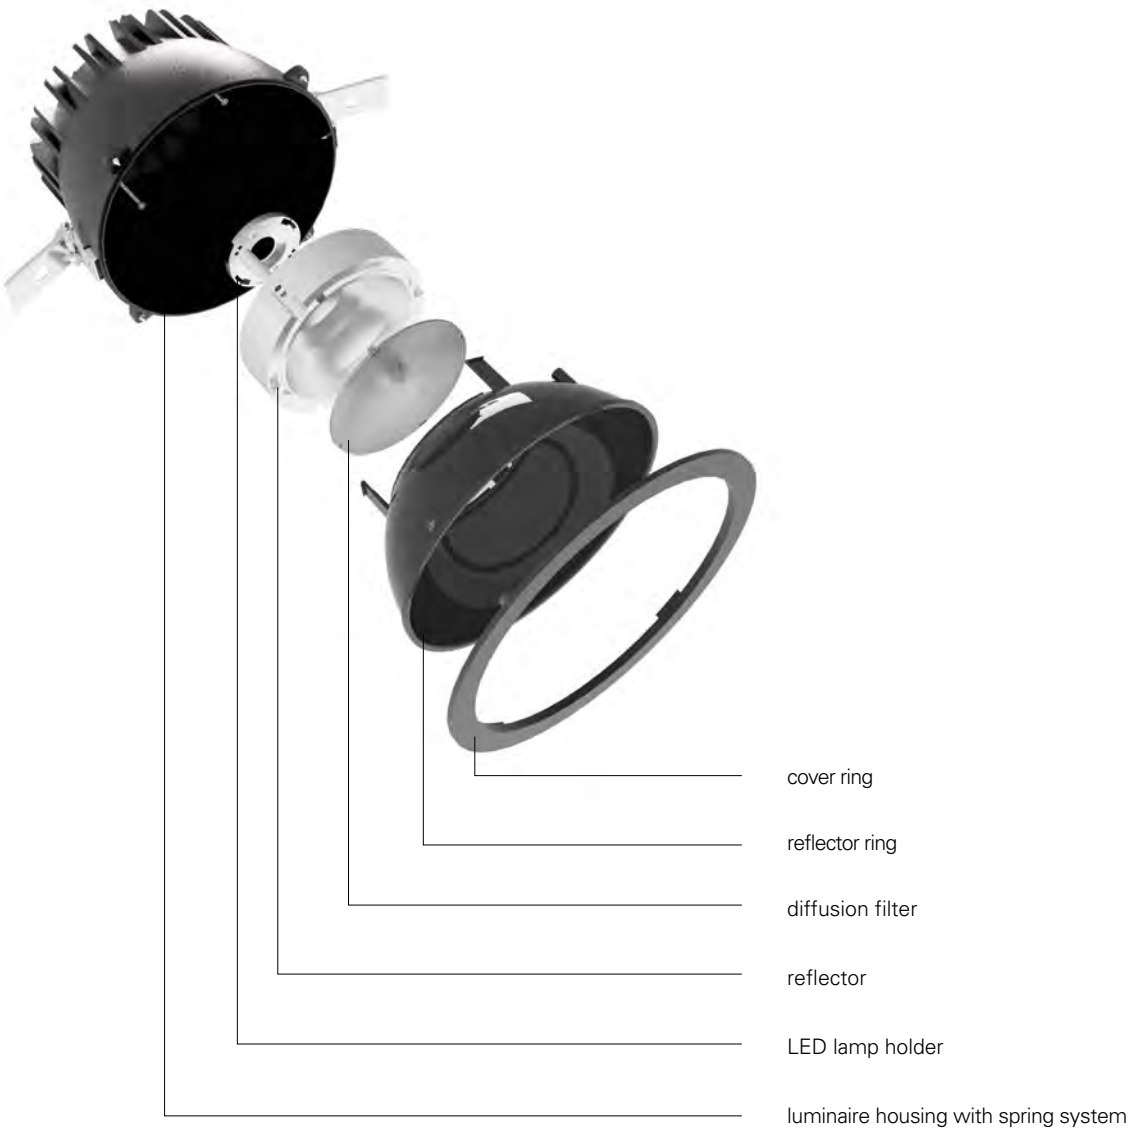

TARVOS

The TARVOS series offers a well-designed LED downlight portfolio for professional indoor lighting solutions. The name of each luminaire directly refers to the cut-out diameter in millimeters – TARVOS 68, 100, 150, or 240. This allows the models to be planned quickly and precisely into existing or new ceiling cut-outs. All TARVOS recessed spotlights are suitable for emergency power operation, feature a round housing, and are available in several variants that differ in housing colour, light colour, beam angle, and control (see list). This enables precise and individual adaptation of the lighting effect to the respective application – from pinpoint accentuation to wide, diffuse general lighting.

Note: Please note that the TARVOS series are project items that are not available from stock. The delivery time is approx. 6 weeks.

TARVOS 68 2700 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	7.2 W
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	860 lm	Cut Out Ø	68 mm
Length	85 mm	CRI (Ra)	90
Width	85 mm	Accumulator/Battery Operated	No
Height	54 mm	IK Protection Class	IK05
Ø	85 mm		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565463	Black	ww	15 Degree	No		**€ 144.95**
565466	Light gray	ww	15 Degree	No		**€ 144.95**
565469	White	ww	15 Degree	No		**€ 144.95**
565472	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565475	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565478	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565464	Black	ww	30 Degree	No		**€ 144.95**
565467	Light gray	ww	30 Degree	No		**€ 144.95**
565470	White	ww	30 Degree	No		**€ 144.95**
565473	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565476	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565479	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565465	Black	ww	45 Degree	No		**€ 144.95**
565468	Light gray	ww	45 Degree	No		**€ 144.95**
565471	White	ww	45 Degree	No		**€ 144.95**
565474	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565477	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565480	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**

IP20

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

TARVOS 68 3000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	7.2 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	870 lm	Cut Out Ø	68 mm
Length	85 mm	CRI (Ra)	90
Width	85 mm	Accumulator/Battery Operated	No
Height	54 mm		
Ø	85 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565481	Black	ww	15 Degree	No		**€ 144.95**
565484	Light gray	ww	15 Degree	No		**€ 144.95**
565487	White	ww	15 Degree	No		**€ 144.95**
565490	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565493	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565496	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565482	Black	ww	30 Degree	No		**€ 144.95**
565485	Light gray	ww	30 Degree	No		**€ 144.95**
565488	White	ww	30 Degree	No		**€ 144.95**
565491	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565494	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565497	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565483	Black	ww	45 Degree	No		**€ 144.95**
565486	Light gray	ww	45 Degree	No		**€ 144.95**
565489	White	ww	45 Degree	No		**€ 144.95**
565492	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565495	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565498	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**

IP20

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

TARVOS 68 3000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	7.2 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	905 lm	Cut Out Ø	68 mm
Length	85 mm	CRI (Ra)	90
Width	85 mm	Accumulator/Battery Operated	No
Height	54 mm		
Ø	85 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565499	Black	NW	15 Degree	No		**€ 144.95**
565502	Light gray	NW	15 Degree	No		**€ 144.95**
565505	White	NW	15 Degree	No		**€ 144.95**
565508	Black	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565511	Light gray	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565514	White	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565500	Black	NW	30 Degree	No		**€ 144.95**
565503	Light gray	NW	30 Degree	No		**€ 144.95**
565506	White	NW	30 Degree	No		**€ 144.95**
565509	Black	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565512	Light gray	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565515	White	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565501	Black	NW	45 Degree	No		**€ 144.95**
565504	Light gray	NW	45 Degree	No		**€ 144.95**
565507	White	NW	45 Degree	No		**€ 144.95**
565510	Black	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565513	Light gray	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**
565516	White	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 199.95**

IP20

Accessories

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

TARVOS 100 2700 K

- **through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **emergency power supply capable**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	10.8 W
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1290 lm	Cut Out Ø	100 mm
Length	115 mm	CRI (Ra)	90
Width	115 mm	Accumulator/Battery Operated	No
Height	68 mm	IK Protection Class	IK05
Ø	115 mm		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565517	Black	ww	15 Degree	No		**€ 159.95**
565520	Light gray	ww	15 Degree	No		**€ 159.95**
565523	White	ww	15 Degree	No		**€ 159.95**
565526	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565529	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565532	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565518	Black	ww	30 Degree	No		**€ 159.95**
565521	Light gray	ww	30 Degree	No		**€ 159.95**
565524	White	ww	30 Degree	No		**€ 159.95**
565527	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565530	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565533	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565519	Black	ww	45 Degree	No		**€ 159.95**
565522	Light gray	ww	45 Degree	No		**€ 159.95**
565525	White	ww	45 Degree	No		**€ 159.95**
565528	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565531	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565534	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**

IP20

TARVOS 100 3000 K

- **through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **emergency power supply capable**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	10.8 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1310 lm	Cut Out Ø	100 mm
Length	115 mm	CRI (Ra)	90
Width	115 mm	Accumulator/Battery Operated	No
Height	68 mm	IK Protection Class	IK05
Ø	115 mm		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565535	Black	ww	15 Degree	No		**€ 159.95**
565538	Light gray	ww	15 Degree	No		**€ 159.95**
565541	White	ww	15 Degree	No		**€ 159.95**
565544	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565547	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565550	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565536	Black	ww	30 Degree	No		**€ 159.95**
565539	Light gray	ww	30 Degree	No		**€ 159.95**
565542	White	ww	30 Degree	No		**€ 159.95**
565545	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565548	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565551	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565537	Black	ww	45 Degree	No		**€ 159.95**
565540	Light gray	ww	45 Degree	No		**€ 159.95**
565543	White	ww	45 Degree	No		**€ 159.95**
565546	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565549	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565552	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**

IP20

TARVOS 100 4000 K

- **through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **emergency power supply capable**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	10.8 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1360 lm	Cut Out Ø	100 mm
Length	115 mm	CRI (Ra)	90
Width	115 mm	Accumulator/Battery Operated	No
Height	68 mm		
Ø	115 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565553	Black	NW	15 Degree	No		**€ 159.95**
565556	Light gray	NW	15 Degree	No		**€ 159.95**
565559	White	NW	15 Degree	No		**€ 159.95**
565562	Black	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565565	Light gray	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565568	White	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565554	Black	NW	30 Degree	No		**€ 159.95**
565557	Light gray	NW	30 Degree	No		**€ 159.95**
565560	White	NW	30 Degree	No		**€ 159.95**
565563	Black	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565566	Light gray	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565569	White	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565555	Black	NW	45 Degree	No		**€ 159.95**
565558	Light gray	NW	45 Degree	No		**€ 159.95**
565561	White	NW	45 Degree	No		**€ 159.95**
565564	Black	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565567	Light gray	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**
565570	White	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 214.95**

IP20

TARVOS 150 2700 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	14.4 W
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1720 lm	Cut Out Ø	150 mm
Length	165 mm	CRI (Ra)	90
Width	165 mm	Accumulator/Battery Operated	No
Height	106 mm		
Ø	165 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565571	Black	ww	15 Degree	No		**€ 189.95**
565574	Light gray	ww	15 Degree	No		**€ 189.95**
565577	White	ww	15 Degree	No		**€ 189.95**
565580	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565583	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565586	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565572	Black	ww	30 Degree	No		**€ 189.95**
565575	Light gray	ww	30 Degree	No		**€ 189.95**
565578	White	ww	30 Degree	No		**€ 189.95**
565581	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565584	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565587	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565573	Black	ww	45 Degree	No		**€ 189.95**
565576	Light gray	ww	45 Degree	No		**€ 189.95**
565579	White	ww	45 Degree	No		**€ 189.95**
565582	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565585	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565588	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**

IP20

TARVOS 150 3000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	14.4 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1750 lm	Cut Out Ø	150 mm
Length	165 mm	CRI (Ra)	90
Width	165 mm	Accumulator/Battery Operated	No
Height	106 mm	IK Protection Class	IK05
Ø	165 mm		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565589	Black	ww	15 Degree	No		**€ 189.95**
565592	Light gray	ww	15 Degree	No		**€ 189.95**
565595	White	ww	15 Degree	No		**€ 189.95**
565598	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565601	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565604	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565590	Black	ww	30 Degree	No		**€ 189.95**
565593	Light gray	ww	30 Degree	No		**€ 189.95**
565596	White	ww	30 Degree	No		**€ 189.95**
565599	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565602	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565605	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565591	Black	ww	45 Degree	No		**€ 189.95**
565594	Light gray	ww	45 Degree	No		**€ 189.95**
565597	White	ww	45 Degree	No		**€ 189.95**
565600	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565603	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565606	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**

TARVOS 150 4000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	14.4 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1810 lm	Cut Out Ø	150 mm
Length	165 mm	CRI (Ra)	90
Width	165 mm	Accumulator/Battery Operated	No
Height	106 mm		
Ø	165 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565607	Black	NW	15 Degree	No		**€ 189.95**
565610	Light gray	NW	15 Degree	No		**€ 189.95**
565613	White	NW	15 Degree	No		**€ 189.95**
565616	Black	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565619	Light gray	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565622	White	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565608	Black	NW	30 Degree	No		**€ 189.95**
565611	Light gray	NW	30 Degree	No		**€ 189.95**
565614	White	NW	30 Degree	No		**€ 189.95**
565617	Black	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565620	Light gray	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565623	White	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565609	Black	NW	45 Degree	No		**€ 189.95**
565612	Light gray	NW	45 Degree	No		**€ 189.95**
565615	White	NW	45 Degree	No		**€ 189.95**
565618	Black	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565621	Light gray	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**
565624	White	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 244.95**

IP20

TARVOS 190 2700 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	21.6 W
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1590 lm	Cut Out Ø	190 mm
Length	205 mm	CRI (Ra)	90
Width	205 mm	Accumulator/Battery Operated	No
Height	124 mm		
Ø	205 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565625	Black	ww	15 Degree	No		**€ 204.95**
565628	Light gray	ww	15 Degree	No		**€ 204.95**
565631	White	ww	15 Degree	No		**€ 204.95**
565634	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565637	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565640	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565626	Black	ww	30 Degree	No		**€ 204.95**
565629	Light gray	ww	30 Degree	No		**€ 204.95**
565632	White	ww	30 Degree	No		**€ 204.95**
565635	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565638	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565641	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565627	Black	ww	45 Degree	No		**€ 204.95**
565630	Light gray	ww	45 Degree	No		**€ 204.95**
565633	White	ww	45 Degree	No		**€ 204.95**
565636	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565639	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565642	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**

IP20

TARVOS 190 3000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	21.6 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	2630 lm	Cut Out Ø	190 mm
Length	205 mm	CRI (Ra)	90
Width	205 mm	Accumulator/Battery Operated	No
Height	124 mm		
Ø	205 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565643	Black	ww	15 Degree	No		**€ 204.95**
565646	Light gray	ww	15 Degree	No		**€ 204.95**
565649	White	ww	15 Degree	No		**€ 204.95**
565652	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565655	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565658	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565644	Black	ww	30 Degree	No		**€ 204.95**
565647	Light gray	ww	30 Degree	No		**€ 204.95**
565650	White	ww	30 Degree	No		**€ 204.95**
565653	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565656	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565659	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565645	Black	ww	45 Degree	No		**€ 204.95**
565648	Light gray	ww	45 Degree	No		**€ 204.95**
565651	White	ww	45 Degree	No		**€ 204.95**
565654	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565657	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565660	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**

IP20

TARVOS 190 4000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power	21.6 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	2720 lm	Cut Out Ø	190 mm
Length	205 mm	CRI (Ra)	90
Width	205 mm	Accumulator/Battery Operated	No
Height	124 mm		
Ø	205 mm	IK Protection Class	IK05

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565661	Black	NW	15 Degree	No		**€ 204.95**
565664	Light gray	NW	15 Degree	No		**€ 204.95**
565667	White	NW	15 Degree	No		**€ 204.95**
565670	Black	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565673	Light gray	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565676	White	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565662	Black	NW	30 Degree	No		**€ 204.95**
565665	Light gray	NW	30 Degree	No		**€ 204.95**
565668	White	NW	30 Degree	No		**€ 204.95**
565671	Black	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565674	Light gray	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565677	White	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565663	Black	NW	45 Degree	No		**€ 204.95**
565666	Light gray	NW	45 Degree	No		**€ 204.95**
565669	White	NW	45 Degree	No		**€ 204.95**
565672	Black	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565675	Light gray	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**
565678	White	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 259.95**

IP20

TARVOS 240 2700 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	2700 K	Cut Out Ø	240 mm
Luminous Flux	3020 lm	CRI (Ra)	90
Length	255 mm	Accumulator/Battery Operated	No
Width	255 mm		
Height	141 mm	IK Protection Class	IK05
Power	25.2 W		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565679	Black	ww	15 Degree	No		**€ 239.95**
565682	Light gray	ww	15 Degree	No		**€ 239.95**
565685	White	ww	15 Degree	No		**€ 239.95**
565688	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565691	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565694	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565680	Black	ww	30 Degree	No		**€ 239.95**
565683	Light gray	ww	30 Degree	No		**€ 239.95**
565686	White	ww	30 Degree	No		**€ 239.95**
565689	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565692	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565695	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565681	Black	ww	45 Degree	No		**€ 239.95**
565684	Light gray	ww	45 Degree	No		**€ 239.95**
565687	White	ww	45 Degree	No		**€ 239.95**
565690	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565693	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565696	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**

IP20

TARVOS 240 3000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Cut Out Ø	240 mm
Luminous Flux	3070 lm	CRI (Ra)	90
Length	255 mm	Accumulator/Battery Operated	No
Width	255 mm		
Height	141 mm	IK Protection Class	IK05
Power	25.2 W		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565697	Black	ww	15 Degree	No		**€ 239.95**
565700	Light gray	ww	15 Degree	No		**€ 239.95**
565703	White	ww	15 Degree	No		**€ 239.95**
565706	Black	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565709	Light gray	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565712	White	ww	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565698	Black	ww	30 Degree	No		**€ 239.95**
565701	Light gray	ww	30 Degree	No		**€ 239.95**
565704	White	ww	30 Degree	No		**€ 239.95**
565707	Black	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565710	Light gray	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565713	White	ww	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565699	Black	ww	45 Degree	No		**€ 239.95**
565702	Light gray	ww	45 Degree	No		**€ 239.95**
565705	White	ww	45 Degree	No		**€ 239.95**
565708	Black	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565711	Light gray	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565714	White	ww	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**

IP20

TARVOS 240 4000 K

- **Through-wiring possible**
- **very high color rendering**
- **BEG eligible**
- **capable of emergency power supply**
- **incl. power supply unit and 230V direct connection**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	4000 K	Cut Out Ø	240 mm
Luminous Flux	3170 lm	CRI (Ra)	90
Length	255 mm	Accumulator/Battery Operated	No
Width	255 mm		
Height	141 mm	IK Protection Class	IK05
Power	25.2 W		

Article	Housing Color		Light Beam Angle	Dimmable	Control	Price
565715	Black	NW	15 Degree	No		**€ 239.95**
565718	Light gray	NW	15 Degree	No		**€ 239.95**
565721	White	NW	15 Degree	No		**€ 239.95**
565724	Black	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565727	Light gray	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565730	White	NW	15 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565716	Black	NW	30 Degree	No		**€ 239.95**
565719	Light gray	NW	30 Degree	No		**€ 239.95**
565722	White	NW	30 Degree	No		**€ 239.95**
565725	Black	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565728	Light gray	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565731	White	NW	30 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565717	Black	NW	45 Degree	No		**€ 239.95**
565720	Light gray	NW	45 Degree	No		**€ 239.95**
565723	White	NW	45 Degree	No		**€ 239.95**
565726	Black	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565729	Light gray	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**
565732	White	NW	45 Degree	Yes	DALI 2.0 / DT6 / Push-Dim	**€ 309.95**

IP20

SLIM

Matching recessed spotlights are available for our SLIM luminaire series. The die-cast aluminium luminaire body is always the same size [300 x 39 mm]. The SLIM recessed spotlights have the standard installation dimension of 68 mm. This makes the single-flame recessed spotlights particularly suitable for sales areas, reception areas or even hotels and restaurants.

page 39

page 331

page 441

SLIM

- **Glare-free, due to low UGR value (<19)**
- **Slim design with only 39 mm diameter**
- **Incl. silver-coloured reflector ring**
- **Installation diameter 68 mm**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	25 mm
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	300 Degree
Length	194 mm	Swivelling Angle	60 Degree
Ø	80 mm	Cut Out Ø	68 mm
Power	5 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90

Article	Housing Color		Price
565408	White	WW	**€ 59.95**
565409	Black	WW	**€ 59.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 4.95**
930745	Reflector ring black for Slim series	**€ 4.95**
930746	Reflector ring gold-coloured for Slim series	**€ 5.95**
930748	36° lens for Slim series	**€ 4.95**
930749	60° lens for Slim series	**€ 4.95**

Ra>90

UNI 2

- **„Glow“ effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000 K	Swivelling Angle	85 Degree
Height	84 mm	Cut Out Ø	125 mm
Ø	139 mm	Control	Dimmable via optional power supply unit
Power	12 W	CRI (Ra)	90
Rated Input Voltage	33-34 V/DC	Rated Current	350 mA
Power Supply Unit incl.	No		
Installation Depth	90 mm		



565361

Article	Housing Color		Luminous Flux	Price
565343	White	WW	760 lm	**€ 119.95**
565361	Black	WW	1010 lm	**€ 119.95**

Accessories

930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 3.60**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930334	Rear white cover for Uni II series		**€ 3.55**
930335	Rear black cover for Uni II series		**€ 2.95**
930336	White heat sink cover for Uni II series		**€ 3.55**
930337	Black heat sink cover for Uni II series		**€ 7.95**
930338	Reflector ring white for Uni II series		**€ 11.95**
930339	Reflector ring black for Uni II series		**€ 10.95**
930340	Reflector ring gold for Uni II series		**€ 10.95**
930341	Reflector ring chrome for Uni II series		**€ 10.95**
180512	BASIC, CC, CC35018/18 W		**€ 23.95**
862191	BASIC, DIM, Multi CC, IE-25D		**€ 64.95**
862204	BASIC, DIM, CC, D35020UF/20 W		**€ 39.95**
930969	Reducing ring round 210/135 mm, Traffic white		**€ 13.95**
931045	Reducing ring round 210/135 mm, Signal white		**€ 13.95**

page 74

page 420

Ra>90

UNI 2 MINI

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree	
Colour Temperature	3000 K	Swivelling Angle	75 Degree	
Height	80 mm	Cut Out Ø	95 mm	
Ø	103 mm	Control	Dimmable via optional power supply unit	
Power	9 W	CRI (Ra)	90	
Rated Input Voltage	18-19 V/DC	Rated Current	500 mA	
Power Supply Unit incl.	No			
Installation Depth	85 mm			



565342

Article	Housing Color		Luminous Flux	Price
565342	White	ww	765 lm	**€ 99.95**
565354	Black	ww	825 lm	**€ 99.95**

Accessories

930328	White heat sink cover for Uni II Mini series		**€ 3.55**
930329	Black heat sink cover for Uni II Mini series		**€ 2.95**
930330	Reflector ring white for Uni II Mini series		**€ 10.95**
930331	Reflector ring black for Uni II Mini series		**€ 10.95**
930332	Reflector ring gold for Uni II Mini series		**€ 10.95**
930333	Reflector ring chrome for Uni II Mini series		**€ 10.95**
930770	Reflector 24° for Uni II Mini series		**€ 10.95**
930771	Reflector 48° for Uni II Mini series		**€ 10.95**
180513	BASIC, CC, CC50018/18 W		**€ 23.95**
862190	BASIC, DIM, Multi CC, IE-12D		**€ 59.95**
862236	OCTO, DIM, CC, RSM-12-500T/12 W		**€ 29.95**
930968	Reducing ring round 155/95 mm, Traffic white		**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white		**€ 11.95**

Ra>90

UNI 2 MAX

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000 K	Swivelling Angle	85 Degree
Height	97 mm	Cut Out Ø	155 mm
Ø	165 mm	Control	Dimmable via optional power supply unit
Power	24 W	CRI (Ra)	90
Rated Input Voltage	34-35 V/DC	Rated Current	700 mA
Power Supply Unit incl.	No		
Installation Depth	100 mm		



565344

Article	Housing Color		Luminous Flux	Price
565351	Black	WW	2260 lm	**€ 149.95**
565344	White	WW	2380 lm	**€ 149.95**

Accessories

930390	24° reflector for Uni II Max		**€ 10.95**
930391	36° reflector for Uni II Max		**€ 12.95**
930392	48° reflector for Uni II Max		**€ 10.95**
930395	White heat sink cover for Uni II Max series		**€ 10.95**
930396	Black heat sink cover for Uni II Max series		**€ 10.95**
930397	Reflector ring white for Uni II Max series		**€ 12.95**
930398	Reflector ring black for Uni II Max series		**€ 10.95**
930399	Reflector ring gold for Uni II Max series		**€ 14.95**
862198	BASIC, CC, V8-30-700 mA/30 W		**€ 26.95**
862208	BASIC, DIM, CC, D70040NTF/40 W		**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**

CETI

The CETI recessed ceiling light with its LED light sources produces a glare-free, warm white light (3,000 K). The recessed reflectors of the luminaire make a major contribution to this. The interchangeable coloured reflector inserts in silver and gold offer additional design options. The CETI can be individually combined with a power supply unit and dimmed.

Ra>90

CETI

- **Very low glare light**
- **Recessed reflectors**
- **Replaceable coloured reflector inserts**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	45 Degree
Colour Temperature	3000 K	Cut Out Width	36 mm
Width	52 mm	Control	Dimmable via optional power supply unit
Height	44 mm		
Power Supply Unit incl.	No	CRI (Ra)	90
Installation Depth	50 mm	Rated Current	700 mA



565250

Article	Housing Color		Luminous Flux	Length	Power	Rated Input Voltage	Cut Out Length	Price
565250	☐ White	ww	800 lm	137 mm	10.5 W	14-15 V/DC	130 mm	**€ 109.95**
565251	☐ White	ww	1600 lm	257 mm	20.2 W	28-29 V/DC	250 mm	**€ 179.95**
565252	☐ White	ww	2400 lm	376 mm	30.8 W	44-45 V/DC	369 mm	**€ 249.95**

Accessories for **565250**

930215	Ceti 5 reflector gold		**€ 9.95**
930218	Ceti 5 reflector silver		**€ 9.95**
862227	FLAT, CC, UT700 mA/12 W		**€ 24.95**
862237	OCTO, DIM, CC, RSM-12-700T/12 W		**€ 29.95**

Accessories for **565251**

930216	Ceti 10 reflector gold		**€ 10.95**
930219	Ceti 10 reflector silver		**€ 10.95**
862191	BASIC, DIM, Multi CC, IE-25D		**€ 64.95**
862198	BASIC, CC, V8-30-700 mA/30 W		**€ 26.95**
862207	BASIC, DIM, CC, D70020UF/20 W		**€ 39.95**

Accessories for **565252**

930217	Ceti 15 reflector gold		**€ 14.95**
930220	Ceti 15 reflector silver		**€ 14.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**
862199	BASIC, CC, V8-40-700 mA/40 W		**€ 29.95**
862208	BASIC, DIM, CC, D70040NTF/40 W		**€ 46.95**

Downlights

page 156

page 157

page 158

page 160

page 161

page 162

page 163

page 164

page 166

page 170

page 172

page 174

ACRUX

- **Integrated power supply unit**
- **Light colour adjustable in three stages**
- **Incl. removable ring in silver/black [model-dependent]**
- **White basic housing, can also be used without colour ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Plastic	Light Beam Angle	90 Degree
Colour Temperature	3000/4000/6000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes		



565317

Article	Housing Color		Luminous Flux	Surface	Ø cut out	Inst. Depth	Height	Ø	Power	Price
565315	White, Silver	WW NW CW	630 lm	Matt	68 mm	55 mm	57.5 mm	95 mm	7.0 W	**€ 19.95**
565362	White, Black	WW NW CW	630 lm	Shiny	68 mm	55 mm	57.5 mm	95 mm	7.0 W	**€ 19.95**
565316	White, Silver	WW NW CW	760 lm	Matt	90 mm	55 mm	58 mm	113 mm	8.0 W	**€ 24.95**
565363	White, Black	WW NW CW	760 lm	Shiny	90 mm	55 mm	58 mm	113 mm	8.0 W	**€ 24.95**
565317	White, Silver	WW NW CW	1370 lm	Matt	120 mm	63 mm	65.8 mm	145 mm	14.5 W	**€ 29.95**
565364	White, Black	WW NW CW	1370 lm	Shiny	120 mm	63 mm	65.8 mm	145 mm	14.5 W	**€ 29.95**
565318	White, Silver	WW NW CW	1570 lm	Matt	145 mm	63 mm	68.5 mm	174 mm	16.0 W	**€ 34.95**
565365	White, Black	WW NW CW	1570 lm	Shiny	145 mm	63 mm	68.5 mm	174 mm	16.0 W	**€ 34.95**
565332	White, Silver	WW NW CW	2670 lm	Matt	195 mm	82 mm	84 mm	244 mm	26.0 W	**€ 49.95**
565366	White, Black	WW NW CW	2670 lm	Shiny	195 mm	82 mm	84 mm	244 mm	26.0 W	**€ 49.95**

IP20 A↑G F

Accessories for **565315**, **565317**, **565318**, **565362**, **565363**, **565364**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

Accessories for **565332**

930971	Reducing ring round 280/210 mm, Traffic white	**€ 23.95**
931047	Reducing ring round 280/210 mm, Signal white	**€ 23.95**

NEW CCT IK05 IP54 Ra>90 UGR<19

ACRUX PRO CCT

- **through-wiring possible**
- **Integrated power supply unit for 230V direct connection**
- **plash-proof [downwards when installed]**
- **light colour adjustable in three stages**
- **power adjustable in 3 stages (only Ø 120 / 145 / 190)**
- **BEG eligible**

Housing	Aluminium, PA - Polyamide	Control	Trailing-edge dimmer, Leading-edge dimmer
Surface	Shiny	CRI (Ra)	90
Colour Temperature	2700/3000/4000 K	Accumulator/Battery Operated	No
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
Light Beam Angle	100 Degree		

Article	Housing Color		Luminous Flux	Height	Ø	Power	Ø cut out	Inst. Depth	Price
565745	White	WW NW	800/840/840 lm	50 mm	90 mm	7 W	68-75 mm	50 mm	**€ 24.95**
565746	Black	WW NW	800/840/840 lm	50 mm	90 mm	7 W	68-75 mm	50 mm	**€ 24.95**
565747	White	WW NW	1080/1130/1180 lm	55 mm	110 mm	9 W	82-95 mm	55 mm	**€ 29.95**
565748	Black	WW NW	1080/1130/1180 lm	55 mm	110 mm	9 W	82-95 mm	55 mm	**€ 29.95**
565749	White	WW NW	1800/1950/1880 lm	60 mm	145 mm	9/12/15 W	120-130 mm	60 mm	**€ 34.95**
565750	Black	WW NW	1800/1950/1880 lm	60 mm	145 mm	9/12/15 W	120-130 mm	60 mm	**€ 34.95**
565751	White	WW NW	2400/2600/2500 lm	72 mm	180 mm	12/16/20 W	145-155 mm	72 mm	**€ 39.95**
565752	Black	WW NW	2400/2600/2500 lm	72 mm	180 mm	12/16/20 W	145-155 mm	72 mm	**€ 39.95**
565753	White	WW NW	3600/3900/3750 lm	85 mm	230 mm	18/24/30 W	190-205 mm	85 mm	**€ 54.95**
565754	Black	WW NW	3600/3900/3750 lm	85 mm	230 mm	18/24/30 W	190-205 mm	85 mm	**€ 54.95**

IP20 IP54

Accessories for **565745**, **565746**

930967	Reducing ring round 130/70 mm, Traffic white	**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white	**€ 9.95**

Accessories for **565747**, **565748**

930968	Reducing ring round 155/95 mm, Traffic white	**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 11.95**

Accessories for **565749**, **565750**

930969	Reducing ring round 210/135 mm, Traffic white	**€ 13.95**
931045	Reducing ring round 210/135 mm, Signal white	**€ 13.95**

Accessories for **565753**, **565754**

930971	Reducing ring round 280/210 mm, Traffic white	**€ 23.95**
931047	Reducing ring round 280/210 mm, Signal white	**€ 23.95**

ANIK ROUND

The ANIK ROUND LED downlight is a high-quality lighting solution for a wide range of applications - for example in reception areas, offices, conference rooms, shops, sales areas, hotels, the catering trade and in bathrooms and WCs. It impresses with its uniform, wide light distribution with a beam angle of 120° and very high colour rendering (Ra ≥ 90). Thanks to its IP44 downward protection rating when installed, it is also suitable for damp environments. The luminaire can be combined with external power supply units and is therefore dimmable. The ANIK ROUND series covers a wide power spectrum from 9 W to 30 W and is available in the colour temperatures 2700 K, 3000 K and 4000 K. With its flat design (19-22 mm high) and various diameters (144-398 mm), it is suitable for both new buildings and refurbishment projects.

NEW IK05 IP44 Ra>90 SDCM<3 UGR<19

ANIK ROUND

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **uniform and wide light distribution**
- **very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
Surface	Powder-coated, Fine structure, Matt	Control	Dimmable via optional power supply unit
Rated Input Voltage	32-37 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Accumulator/Battery Operated	No
		IK Protection Class	IK05

Article	Housing Color	Colour Temp.	Luminous Flux	Ø cut out	Height	Ø	Rated Current	Power	Price
565410	White	WW 2700 K	1070 lm	130 mm	19 mm	144 mm	260 mA	9.0 W	**€ 33.95**
565413	White	WW 2700 K	1540 lm	165 mm	22 mm	173 mm	350 mA	12.0 W	**€ 47.95**
565416	White	WW 2700 K	2050 lm	220 mm	20 mm	234 mm	500 mA	17.0 W	**€ 68.95**
565419	White	WW 2700 K	4130 lm	380 mm	20 mm	398 mm	900 mA	30.0 W	**€ 98.95**
565411	White	WW 3000 K	1100 lm	130 mm	19 mm	144 mm	260 mA	9.0 W	**€ 33.95**
565414	White	WW 3000 K	1580 lm	165 mm	22 mm	173 mm	350 mA	12.0 W	**€ 47.95**
565417	White	WW 3000 K	2080 lm	220 mm	20 mm	234 mm	500 mA	17.0 W	**€ 68.95**
565420	White	WW 3000 K	4180 lm	380 mm	20 mm	398 mm	900 mA	30.0 W	**€ 98.95**
565412	White	NW 4000 K	1150 lm	130 mm	19 mm	144 mm	260 mA	9.0 W	**€ 33.95**
565415	White	NW 4000 K	1620 lm	165 mm	22 mm	173 mm	350 mA	12.0 W	**€ 47.95**
565418	White	NW 4000 K	2130 lm	220 mm	20 mm	234 mm	500 mA	17.0 W	**€ 68.95**
565421	White	NW 4000 K	4230 lm	380 mm	20 mm	398 mm	900 mA	30.0 W	**€ 98.95**

CC | IP20 | IP44 | III

Accessories for **565410**, **565411**, **565412**
862285 BASIC, DIM, CC, D350012UF/12 W **€ 32.95**

Accessories for **565410**, **565411**, **565412**, **565413**, **565414**, **565415**
862190 BASIC, DIM, Multi CC, IE-12D **€ 59.95**

Accessories for **565413**, **565414**, **565415**
180512 BASIC, CC, CC35018/18 W **€ 23.95**
862203 BASIC, DIM, CC, D350012UF/12 W **€ 36.95**

Accessories for **565416**, **565417**, **565418**
862191 BASIC, DIM, Multi CC, IE-25D **€ 64.95**
862205 BASIC, DIM, CC, D50020UF/20 W **€ 39.95**
862226 FLAT, CC, UT500 mA/20 W **€ 28.95**

Accessories for **565419**, **565420**, **565421**
862157 BASIC, CC, V8-40-900/40 W **€ 29.95**
862192 BASIC, DIM, Multi CC, IE-45D **€ 69.95**

ANIK ROUND CCT

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **light colour adjustable from 2700-6500 K via opt. controller**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	2700-6500 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		

Article	Housing Color		Luminous Flux	Height	Ø	Power	Ø cut out	Installation Depth	Price
565422	White	WW CW	850 lm	19 mm	144 mm	9.0 W	130 mm	16.5 mm	**€ 45.95**
565423	White	WW CW	1310 lm	22 mm	173 mm	12.0 W	165 mm	19.5 mm	**€ 58.95**
565424	White	WW CW	1850 lm	20 mm	234 mm	17.0 W	220 mm	17.5 mm	**€ 79.95**
565425	White	WW CW	3220 lm	20 mm	398 mm	30.0 W	380 mm	17 mm	**€ 109.95**

CV | IP20 | IP44

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**
862165	BASIC, CV, Q8H-12-100 W		**€ 96.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 84.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 84.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 179.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 114.95**

Accessories for **565422**

930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Accessories for **565422**, **565423**

862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**

Accessories for **565424**

862163	BASIC, CV, Q8H-24-40 W		**€ 46.95**

Accessories for **565425**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**

NEW · IK05 · IP44 · Ra>90 · RGBWW · SDCM<3 · UGR<19

ANIK ROUND RGBW

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **suitable for 24V colour control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply unit**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	3000 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		

Article	Housing Color		Luminous Flux	Height	Ø	Power	Ø cut out	Installation Depth	Price
565426	White	RGB WW	735 lm	19 mm	144 mm	9.0 W	130 mm	16.5 mm	**€ 54.95**
565427	White	RGB WW	1110 lm	22 mm	173 mm	12.0 W	165 mm	19.5 mm	**€ 68.95**
565428	White	RGB WW	1190 lm	20 mm	234 mm	17.0 W	220 mm	17.5 mm	**€ 89.95**
565429	White	RGB WW	2420 lm	20 mm	398 mm	30.0 W	380 mm	17 mm	**€ 119.95**

CV · IP20 · IP44

Accessories

843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**
862165	BASIC, CV, Q8H-12-100 W		**€ 96.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6		**€ 94.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8		**€ 94.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 179.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 114.95**

Accessories for **565426**

930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Accessories for **565426**, **565427**

862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**

Accessories for **565428**

862163	BASIC, CV, Q8H-24-40 W		**€ 46.95**

Accessories for **565429**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**

ANIK SQUARE

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **uniform and wide light distribution**
- **very high colour rendering**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional power supply unit
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Rated Input Voltage	32-37 V/DC	Accumulator/Battery Operated	No
Power Supply Unit incl.	No	IK Protection Class	IK05

Article	Housing Color	Colour Temp.	Lum. Flux	Rated Current	Power	L x W x H	L x W cut out	Price
565430	White	WW 2700 K	1020 lm	260 mA	9,0 W	110x110x21 mm	90x90 mm	**€ 33.95**
565433	White	WW 2700 K	2060 lm	500 mA	17,0 W	180x180x21 mm	155x155 mm	**€ 47.95**
565436	White	WW 2700 K	2860 lm	700 mA	24,0 W	237x237x21 mm	215x215 mm	**€ 68.95**
565439	White	WW 2700 K	3850 lm	900 mA	30,0 W	398x398x20 mm	380x380 mm	**€ 98.95**
565431	White	WW 3000 K	1050 lm	260 mA	9,0 W	110x110x21 mm	90x90 mm	**€ 33.95**
565434	White	WW 3000 K	2100 lm	500 mA	17,0 W	180x180x21 mm	155x155 mm	**€ 47.95**
565437	White	WW 3000 K	2910 lm	700 mA	24,0 W	237x237x21 mm	215x215 mm	**€ 68.95**
565440	White	WW 3000 K	3900 lm	900 mA	30,0 W	398x398x20 mm	380x380 mm	**€ 98.95**
565432	White	NW 4000 K	1100 lm	260 mA	9,0 W	110x110x21 mm	90x90 mm	**€ 33.95**
565435	White	NW 4000 K	2150 lm	500 mA	17,0 W	180x180x21 mm	155x155 mm	**€ 47.95**
565438	White	NW 4000 K	2950 lm	700 mA	24,0 W	237x237x21 mm	215x215 mm	**€ 68.95**
565441	White	NW 4000 K	4170 lm	900 mA	30,0 W	398x398x20 mm	380x380 mm	**€ 98.95**

Accessories for **565430**, **565431**, **565432**

862190	BASIC, DIM, Multi CC, IE-12D		**€ 59.95**
862285	BASIC, DIM, CC, D350012UF/12 W		**€ 32.95**

Accessories for **565433**, **565434**, **565435**

862205	BASIC, DIM, CC, D50020UF/20 W		**€ 39.95**
862226	FLAT, CC, UT500 mA/20 W		**€ 28.95**

Accessories for **565433**, **565434**, **565435**, **565436**, **565437**, **565438**

862191	BASIC, DIM, Multi CC, IE-25D		**€ 64.95**

Accessories for **565436**, **565437**, **565438**

862198	BASIC, CC, V8-30-700 mA/30 W		**€ 26.95**
862208	BASIC, DIM, CC, D70040NTF/40 W		**€ 46.95**

Accessories for **565439**, **565440**, **565441**

862157	BASIC, CC, V8-40-900/40 W		**€ 29.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**

ANIK SQUARE CCT

- **splash-proof [downwards when installed]**
- **very low installation depth [max. 36mm]**
- **light colour adjustable from 2700-6500 K via opt. controller**
- **uniform and wide light distribution**
- **very high colour rendering**
- **individually combinable and dimmable with power supply**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	2700-6500 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		

Article	Housing Color		Luminous Flux	L x W x H	L x W cut out	Power	Price
565442	☐ White	WW CW	860 lm	110x110x21 mm	90x90 mm	9.0 W	**€ 45.95**
565443	☐ White	WW CW	1860 lm	180x180x21 mm	155x155 mm	17.0 W	**€ 58.95**
565444	☐ White	WW CW	2620 lm	237x237x21 mm	215x215 mm	24.0 W	**€ 79.95**
565445	☐ White	WW CW	3290 lm	398x398x20 mm	380x380 mm	30.0 W	**€ 109.95**

CV | IP20 | IP44

Accessories

843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**
862165	BASIC, CV, Q8H-12-100 W		**€ 96.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6		**€ 84.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8		**€ 84.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 179.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 114.95**

Accessories for **565442**

862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Accessories for **565443**, **565444**

862163	BASIC, CV, Q8H-24-40 W		**€ 46.95**

Accessories for **565445**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**

ANIK SQUARE RGBW

- **splash-proof [downwards when installed]**
- **suitable for 24V colour control**
- **uniform and wide light distribution**
- **very high colour rendering**
- **can be individually combined and dimmed with power supply unit**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium, Steel, PMMA - Polymethyl methacrylate	Light Beam Angle	120 Degree
		Control	Dimmable via optional controller
Surface	Powder-coated, Fine structure, Matt	CRI (Ra)	90
Colour Temperature	3000 K	Accumulator/Battery Operated	No
Rated Input Voltage	24 V/DC	IK Protection Class	IK05
Power Supply Unit incl.	No		

Article	Housing Color		Luminous Flux	L x W x H	L x W cut out	Power	Price
565446	☐ White	RGB WW	780 lm	110x110x21 mm	90x90 mm	9.0 W	**€ 54.95**
565447	☐ White	RGB WW	1230 lm	180x180x21 mm	155x155 mm	17.0 W	**€ 68.95**
565448	☐ White	RGB WW	1890 lm	237x237x21 mm	215x215 mm	24.0 W	**€ 89.95**
565449	☐ White	RGB WW	2500 lm	398x398x20 mm	380x380 mm	30.0 W	**€ 119.95**

CV | IP20 | IP44 | III

Accessories

843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**
862165	BASIC, CV, Q8H-12-100 W		**€ 96.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6		**€ 94.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8		**€ 94.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)		**€ 179.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free		**€ 114.95**

Accessories for **565446**

862234	FLAT, CV, UT 24 V/20 W		**€ 25.95**
930967	Reducing ring round 130/70 mm, Traffic white		**€ 9.95**
931043	Reducing ring round 130/70 mm, Signal white		**€ 9.95**

Accessories for **565447**, **565448**

862163	BASIC, CV, Q8H-24-40 W		**€ 46.95**

Accessories for **565449**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**

NEW

REDUCING RINGS FOR RECESSED LIGHTS

- **Renovation solution for excessively large ceiling cut-outs**
- **Flexible adaptation to ceiling cut-outs**
- **suitable for 3-30 mm thick hollow ceilings**
- **toolless installation possible**

Housing Metal Height 1.5 mm

Article	Housing Color	Length	Width	Ø	Cut Out Ø	Inner diameter	Price
930967	White			130 mm	95 mm	70 mm	**€ 9.95**
931043	White			130 mm	95 mm	70 mm	**€ 9.95**
930968	White			155 mm	120 mm	95 mm	**€ 11.95**
931044	White			155 mm	120 mm	95 mm	**€ 11.95**
930969	White			210 mm	175 mm	135 mm	**€ 13.95**
931045	White			210 mm	175 mm	135 mm	**€ 13.95**
930970	White			240 mm	205 mm	180 mm	**€ 17.95**
931046	White			240 mm	205 mm	180 mm	**€ 17.95**
930971	White			280 mm	245 mm	210 mm	**€ 23.95**
931047	White			280 mm	245 mm	210 mm	**€ 23.95**
930972	White	130 mm	130 mm		95 mm	70 mm	**€ 9.95**
931048	White	130 mm	130 mm		95 mm	70 mm	**€ 9.95**
930973	White	155 mm	155 mm		120 mm	95 mm	**€ 11.95**
931049	White	155 mm	155 mm		120 mm	95 mm	**€ 11.95**
930974	White	210 mm	210 mm		175 mm	135 mm	**€ 13.95**
931050	White	210 mm	210 mm		175 mm	135 mm	**€ 13.95**
930975	White	240 mm	240 mm		205 mm	180 mm	**€ 17.95**
931051	White	240 mm	240 mm		205 mm	180 mm	**€ 17.95**
930976	White	280 mm	280 mm		245 mm	210 mm	**€ 23.95**
931052	White	280 mm	280 mm		245 mm	210 mm	**€ 23.95**

Ra>90 SDCM<3

COB 95 MAX

- **Connector on lamp housing**
- **Incl. two diffusing lenses [transparent, satin-finished]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Installation Depth	53 mm
Luminous Flux	1100 lm	Light Beam Angle	60 Degree
Height	53 mm	Cut Out Ø	95 mm
Ø	110 mm	Control	Dimmable via optional power supply unit
Power	13 W		
Rated Input Voltage	34.8 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	350 mA

Article	Housing Color	Colour Temperature	EEI	Price
565007	White	WW 3000 K	F	**€ 94.95**
565010	White	NW 4000 K	G	**€ 94.95**

CC | IP20

Accessories

180512	BASIC, CC, CC35018/18 W	**€ 23.95**
862204	BASIC, DIM, CC, D35020UF/20 W	**€ 39.95**
862191	BASIC, DIM, Multi CC, IE-25D	**€ 64.95**
930968	Reducing ring round 155/95 mm, Traffic white	**€ 11.95**
931044	Reducing ring round 155/95 mm, Signal white	**€ 11.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

COB 130 MAX

- **Connector on lamp housing**
- **Incl. two diffusing lenses [transparent/satin-finished]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	60 Degree
Height	69 mm	Cut Out Ø	130 mm
Ø	145 mm	Control	Dimmable via optional power supply unit
Power	18.5 W		
Rated Input Voltage	34.8 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	500 mA
Installation Depth	69 mm		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565180	White	WW 3000 K	1360 lm	**€ 124.95**
565181	White	NW 4000 K	1451 lm	**€ 124.95**

CC | IP20 | III | A ↑ G | G

Accessories

862226	FLAT, CC, UT500 mA/20 W		**€ 28.95**
862205	BASIC, DIM, CC, D50020UF/20 W		**€ 39.95**
862191	BASIC, DIM, Multi CC, IE-25D		**€ 64.95**
930969	Reducing ring round 210/135 mm, Traffic white		**€ 13.95**
931045	Reducing ring round 210/135 mm, Signal white		**€ 13.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

COB 170 MAX

- **Connector on lamp housing**
- **Incl. two diffusing lenses [transparent, satin-finished]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	60 Degree
Luminous Flux	2100 lm	Cut Out Ø	170 mm
Height	86 mm	Control	Dimmable via optional power supply unit
Ø	190 mm		
Rated Input Voltage	35 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	700 mA
Installation Depth	86 mm		

Article	Housing Color	Colour Temperature	Power	Price
565182	White	WW 3000 K	25.0 W	**€ 145.95**
565183	White	NW 4000 K	25.6 W	**€ 145.95**



Accessories

862198	BASIC, CC, V8-30-700 mA/30 W		**€ 26.95**
862208	BASIC, DIM, CC, D70040NTF/40 W		**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**
930970	Reducing ring round 240/180 mm, Traffic white		**€ 17.95**
931046	Reducing ring round 240/180 mm, Signal white		**€ 17.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

COB 210 MAX

- **Connector on lamp housing**
- **Incl. two diffusing lenses [transparent, satin-finished]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Light Beam Angle	60 Degree
Height	99 mm	Cut Out Ø	210 mm
Ø	230 mm	Control	Dimmable via optional power supply unit
Power	37 W		
Rated Input Voltage	35 V/DC	CRI (Ra)	90
Power Supply Unit incl.	No	Rated Current	1050 mA
Installation Depth	99 mm		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565184	White	WW 3000 K	3000 lm	**€ 184.95**
565185	White	NW 4000 K	3200 lm	**€ 184.95**

CC | IP20 | III | A ↑ G | G

Accessories

862201	BASIC, CC, V8-40-1,050 mA/40 V		**€ 29.95**
862209	BASIC, DIM, CC, D105040NTF/40 W		**€ 46.95**
862193	BASIC, DIM, Multi CC, IE-45HD		**€ 69.95**
930971	Reducing ring round 280/210 mm, Traffic white		**€ 23.95**
931047	Reducing ring round 280/210 mm, Signal white		**€ 23.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

MODULAR SYSTEM COB 31 W

The MODULAR recessed ceiling light range offers a wide range of possible applications. Whether virtually invisible or with a prominent frame - these modules are as flexible as you want them to be. By replacing the reflectors, different light beams can be created and by using filters / diffusers, you can individually select or retrofit your lighting mood. We offer the LED modules in warm and neutral white. This gives you the option of adapting the individual elements to local requirements in order to create your perfect lighting situation.

Ra>90

MODULAR SYSTEM COB 31 W

·Lamp can be customised with comprehensive accessories

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	No
Height	103 mm	Light Beam Angle	60 Degree
Ø	85 mm	CRI (Ra)	90
Power	31 W	Rated Current	900 mA
Rated Input Voltage	35-36 V/DC		



565352

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565352	Grey	WW 3000 K	3270 lm	**€ 124.95**
565353	Grey	NW 4000 K	3350 lm	**€ 124.95**



Accessories

930084	17° reflector for modular system COB	**€ 19.95**
930085	40° reflector for modular system COB	**€ 19.95**
930087	Frosted glass diffuser for modular system COB	**€ 1.25**
930088	Honeycomb filter for modular system COB	**€ 5.95**
930089	built-in ring fixed, Ø 170 mm, cut-out Ø 150 mm	**€ 22.95**
930090	built-in ring fixed, Ø 230 mm, cut-out Ø 220 mm	**€ 29.95**
930091	built-in ring fixed, Ø 130 mm, cut-out Ø 115 mm	**€ 32.95**
930092	Cardan frame 1-fold transversable, cut-out size: 130 x 130 mm	**€ 36.95**
930093	Cardan frame 2-fold transversable, cut-out size: 240 x 130 mm	**€ 66.95**
930094	Cardan frame 1-fold without frame white, cut-out size: 120 x 120 mm	**€ 89.95**
930095	Cardan frame 1-fold without frame black, cut-out size: 120 x 120 mm	**€ 89.95**
930096	Cardan frame 2-fold without frame weiß, cut-out size: 247 x 120 mm	**€ 115.95**
930097	Cardan frame 2-fold without frame black, cut-out size: 247 x 120 mm	**€ 115.95**
862157	BASIC, CC, V8-40-900/40 W	**€ 29.95**
862264	BASIC, DIM, CC, D090040NTF/40 W	**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D	**€ 69.95**

ZAURAK

Recessed ceiling lights can be subtly integrated into private and commercial spaces, yet when it comes to replacing, the existing ceiling cut-out can present a problem. The ZAURAK series comes with an adjustable mounting clip, which can be used with larger and smaller ceiling cut-outs. In addition, the ZAURAK has a low installation depth for universal use. Two exchangeable cover rings in silver and black are included in the scope of delivery.

ZAURAK

- **Light colour adjustable in three stages**
- **Output adjustable in two stages**
- **Adjustable recess dimension 65-270 mm [model-dependent]**
- **Ideal renovation solution for ceiling recesses**
- **Incl. two colour rings [black/silver]**

Application Area
Bathroom / WC, Corridor / stairwell, Home / Living, Refurbishment

Housing	Plastic	Light Beam Angle	110 Degree
Colour Temperature	3000/4000/5700 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



565327

Article	Housing Color		Luminous Flux	Height	Ø	Power Selectable	Cut Out Ø	Price
565327	White	WW NW CW	1060 lm	20.5 mm	180 mm	8.0 W / 12.0 W	65-160 mm	**€ 46.95**
565328	White	WW NW CW	1750 lm	21.5 mm	220 mm	12.0 W / 18.0 W	120-200 mm	**€ 56.95**
565329	White	WW NW CW	2420 lm	25 mm	300 mm	18.0 W / 25.0 W	150-270 mm	**€ 79.95**



Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

PUNTO LUMI

The PUNTO LUMI is a sophisticated LED recessed ceiling light with warm white light (3,000 K) that is also ideal for integration in furniture due to its small installation diameter (18 mm). The PUNTO LUMI is also protected against splash water with its IP44 certification and is therefore suitable for use in wet areas such as bathrooms. The recessed light is available in a white and silver-coloured housing design.

IP44 SDCM<5

PUNTO LUMI

- **Suitable for wet areas**
- **Sophisticated light for furniture/ceiling installation**
- **Small installation diameter**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, Bathroom / WC

Housing	Aluminium	Power Supply Unit incl.	No
Colour Temperature	3000 K	Installation Depth	30 mm
Luminous Flux	40 lm	Light Beam Angle	50 Degree
Height	25 mm	Cut Out Ø	18 mm
Ø	30 mm	CRI (Ra)	80
Power	1 W	Rated Current	350 mA
Rated Input Voltage	3.1-3.9 V/DC		



565172

Article	Housing Color	Surface	Price
565172	White	WW	**€ 18.95**
565173	Silver	WW Shiny	**€ 18.95**

CC IP44 III

Accessories

872628 FLAT, CC, UT350 mA/6 W **€ 17.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

insert panels

page 178

page 182

page 183

page 184

page 185

page 188

page 189

page 190

page 192

page 193

page 194

page 195

LED PANEL SMALL

- **Can be installed in surface-mount or flush-mount frames**
- **For insertion into grid ceilings**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	No
Surface	Matt	Light Beam Angle	120 Degree
Length	295 mm	Control	Dimmable via optional power supply unit
Width	295 mm		
Height	10 mm	CRI (Ra)	80
Power	25 W	Rated Current	700 mA
Rated Input Voltage	36-42 V/DC		



565220

Article	Housing Color	Colour Temperature	Luminous Flux	EEI	Price
565220	White	WW 3000 K	2810 lm	F	**€ 78.95**
565221	White	NW 4000 K	3070 lm	E	**€ 78.95**

Accessories

930167	Surface-mounted frame 300x300 for standard panels	**€ 29.95**
930230	Recessed frame for gypsum 30x30	**€ 29.95**
862198	BASIC, CC, V8-30-700 mA/30 W	**€ 26.95**
862208	BASIC, DIM, CC, D70040NTF/40 W	**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D	**€ 69.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

BACKLIGHT PANELS [SERIES: BASIC AND PRO] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat and glare-free light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example, the LED panels from our BASIC and PRO series rely on backlight technology.

In LED panels with backlight technology, the LEDs - behind the diffuser - are evenly spread over the entire panel surface and shine directly downwards. This design has a decisive advantage: no other components are required to direct the light in the desired direction [downwards], because the LEDs are already in the »right« position. The simpler design results above all in better efficiency and a lower price as well as a longer lifetime. At the same time you do not have to worry about possible yellowing of the light guide plate, which is often used in some cheaper sidelight panels.

The disadvantages: Due to their design, the LED elements require more space, which is why backlight panels are curved towards the backside and therefore have a higher thickness with it. For this [optical] reason, backlight panels are only suitable to a limited extent for suspension from the ceiling. Their smaller beam angle [approx. 90°] results in a smaller illuminated area.

advantages

- better efficiency
- longer lifetime
- lower costs
- much more attractive price/performance ratio
- no light guide plates that are prone to yellowing

disadvantages

- higher thickness
- lower beam angle [approx. 90°]
- less suitable for suspension
- thicker packaging

In the following picture you can see the typical structure of a backlight LED panel.

aluminium frame

microprismatic diffusing lens

diffuser disc

aluminium circuit board with lens LEDs

reflector insert

basic housing

BASIC

- **BEG-eligible**
- **cost-effective, ready-to-connect solution**
- **for insertion into grid ceilings**
- **Mounting in surface-mounted and recessed frames possible**
- **Refurbishment solution for T5/T8 louvre luminaires**
- **Incl. power supply unit CC, 900mAh, 33-38V, 36W**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	120 Degree
Height	32 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes	UGR	22



100140

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	Power	Price
100143	White	WW 3000 K	3900 lm	295 mm	1195 mm	30.5 W	**€ 79.95**
100149	White	WW 3000 K	3900 lm	595 mm	595 mm	30.5 W	**€ 69.95**
100140	White	WW 3000 K	3900 lm	620 mm	620 mm	30.5 W	**€ 74.95**
100144	White	NW 4000 K	4320 lm	295 mm	1195 mm	30.5 W	**€ 79.95**
100150	White	NW 4000 K	4320 lm	595 mm	595 mm	30.5 W	**€ 69.95**
100141	White	NW 4000 K	4320 lm	620 mm	620 mm	33.0 W	**€ 74.95**



Accessories

930674	Safety cable		**€ 4.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 4.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**

Accessories for **100140**, **100141**

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930668	Recessed frame for 620x620 mm panel		**€ 57.95**

Accessories for **100143**, **100144**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 69.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 67.95**

Accessories for **100149**, **100150**

930664	Surface-mounted frame for 595x595 mm panel		**€ 54.95**
930667	Recessed frame for 595x595 mm panel		**€ 52.95**

BASIC FLEX

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Light colour adjustable in three stages**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Renovation solution for T5/T8 louver lights**
- **Incl. CC power supply, 900 mAh, 33-38 V, 36 W**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000/6000 K	Light Beam Angle	120 Degree
Luminous Flux	3900/4320/4140 lm	CRI (Ra)	80
Height	32 mm	IK Protection Class	IK03
Power	30.5 W	UGR	22
Rated Input Voltage	220-240 V/AC		



100142

Article	Housing Color		Length	Width	Price
100145	White	WW NW CW	295 mm	1195 mm	**€ 99.95**
100142	White	WW NW CW	620 mm	620 mm	**€ 94.95**

IP40 | 1 CH | A ↑ G | E

Accessories

930674	Safety cable		**€ 4.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 4.95**
862264	BASIC, DIM, CC, D090040NTF/40 W		**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**

Accessories for **100142**

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930668	Recessed frame for 620x620 mm panel		**€ 57.95**

Accessories for **100145**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 69.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 67.95**

BASIC OFFICE

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**
- **Suitable for office spaces, reception rooms and hallways**
- **Good value, ready-to-install solution**
- **Incl. CC power supply, 900 mAh, 33-38 V, 36 W**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	4000 K	Light Beam Angle	90 Degree
Luminous Flux	4000 lm	CRI (Ra)	80
Height	32 mm	IK Protection Class	IK03
Power	30.5 W	UGR	19
Rated Input Voltage	220-240 V/AC		



100146

Article	Housing Color		Length	Width	Price
100147	☐ White	NW	295 mm	1195 mm	**€ 89.95**
100151	☐ White	NW	595 mm	595 mm	**€ 79.95**
100146	☐ White	NW	620 mm	620 mm	**€ 84.95**



Accessories

930674	Safety cable		**€ 4.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 4.95**
862264	BASIC, DIM, CC, D090040NTF/40 W		**€ 46.95**
862192	BASIC, DIM, Multi CC, IE-45D		**€ 69.95**

Accessories for **100146**

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930668	Recessed frame for 620x620 mm panel		**€ 57.95**

Accessories for **100147**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 69.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 67.95**

Accessories for **100151**

930664	Surface-mounted frame for 595x595 mm panel		**€ 54.95**
930667	Recessed frame for 595x595 mm panel		**€ 52.95**

PRO OFFICE

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Highly efficient solution**
- **Renovation solution for T5/T8 louver lights**
- **Suitable for office spaces/reception rooms/hallways**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Control	Dimmable via optional power supply unit
Height	32 mm		
Power	17 W	CRI (Ra)	80
Rated Input Voltage	35-40 V/DC	Rated Current	450 mA
Power Supply Unit incl.	No	IK Protection Class	IK03
Light Beam Angle	90 Degree	UGR	19



100084

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	EEI	Price
100084	White	WW 3000 K	2880 lm	620 mm	620 mm	D	**€ 109.95**
100089	White	WW 3000 K	2880 lm	1195 mm	295 mm	E	**€ 114.95**
100122	White	NW 4000 K	3200 lm	295 mm	1195 mm	D	**€ 114.95**
100148	White	NW 4000 K	3200 lm	595 mm	595 mm	C	**€ 104.95**
100088	White	NW 4000 K	3200 lm	620 mm	620 mm	D	**€ 109.95**

CC | IP40 | 1 CH

Accessories

930674	Safety cable		**€ 4.95**
930676	Mounting brackets for 600x600/300x1,200 mm backlit panel		**€ 4.95**
862257	QUICK, CC, 450 mA, 30-40 V, 20 W		**€ 36.95**
862191	BASIC, DIM, Multi CC, IE-25D		**€ 64.95**

Accessories for **100084**, **100088**

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930668	Recessed frame for 620x620 mm panel		**€ 57.95**

Accessories for **100089**, **100122**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 69.95**
930669	Recessed frame for 300x1,200 mm panel		**€ 67.95**

Accessories for **100148**

930664	Surface-mounted frame for 595x595 mm panel		**€ 54.95**
930667	Recessed frame for 595x595 mm panel		**€ 52.95**

SIDELIGHT-PANELS [SERIES: STANDARD] – TECHNOLOGY AND ADVANTAGES

Not every LED panel is built the same! There are technologies exist to produce homogeneous, flat light. Each method has its own advantages and disadvantages and depends on the individual user requirements and budget needs. For example LED panels from our standard series use sidelight technology.

Unlike backlight panels, the LEDs are not spread over the entire panel surface, but are located on the side of the aluminum frame of the luminaire. Depending on the model and version, only one, two or all four sides are equipped with LED stripes. What all edgelit or sidelight panels have in common is that the LEDs shine into the center of the panel.The light must therefore still be redirected in order to radiate downwards.

The most important element here is the light guide plate. This is usually made of acrylic glass [also PMMA (polymethyl methacrylate), a transparent thermoplastic material], which distributes the light evenly over the entire surface and deflects it downwards. In addition, acrylic glass does not yellow with age. In addition to the light guide plate, which deflects the light by means of small laser-engraved dots, the additional reflector, similar to the one the backlight panel, and the diffuser also contribute to the significantly more complex structure of a sidelight panel [see picture to the right].

The great advantage is the lower construction thickness, which is why edgelit panels can be integrated more discreetly in rooms and are better suited as pendant variants. At the same time, the panels allow a higher beam angle [approx. 120°] what results in a larger illuminated area.
The disadvantages: Edgelit panels are more expensive and offer less efficiency and lifetime compared to backlight panels.

advantages

- lower thickness
- higher beam angle [approx. 120°]
- more suitable for suspension
- thinner packing

disadvantages

- higher costs
- worse price/performance ratio
- average lifetime
- lower efficiency

In the following picture you can see the typical structure of a sidelight LED panel.

aluminium frame mithit LEDs

microprismatic diffusing lens

diffuser disc

light guide panel

reflector insert

EVA [ethylene vinyl acetate copolymer] foam

back panel

STANDARD FLEX

- **Light colour adjustable in three stages**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for reception rooms and hallways**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Control	Dimmable via optional power supply unit
Colour Temperature	3000/4000/6000 K		
Height	10 mm	CRI (Ra)	90
Rated Input Voltage	33-38 V/DC	IK Protection Class	IK03
Power Supply Unit incl.	No	UGR	22
Light Beam Angle	120 Degree		



100123

Article	Housing Color		Luminous Flux	Length	Width	Power	Rated Current	Price
100125	☐ White	WW NW CW	3570/3990/3780 lm	1195 mm	295 mm	36.0 W	1050 mA	**€ 124.95**
100123	☐ White	WW NW CW	3780/4200/4000 lm	620 mm	620 mm	36.0 W	1050 mA	**€ 119.95**
100139	☐ White	WW NW CW	5300/6000/5700 lm	1195 mm	595 mm	51.5 W	1500 mA	**€ 219.95**
100154	☐ White	WW NW CW	5300/6000/5700 lm	1240 mm	620 mm	51.5 W	1500 mA	**€ 229.95**



Accessories
930674 Safety cable **€ 4.95**

Accessories for **100123**
930665 Surface-mounted frame for 620x620 mm panel **€ 59.95**
930670 Recessed frame for 620x620 mm backlit panel **€ 59.95**

Accessories for **100123**, **100125**
930672 Cable suspension for 620x620/300x1,200 mm panel **€ 22.95**
862193 BASIC, DIM, Multi CC, IE-45HD **€ 69.95**
862258 QUICK, CC, 1,050 mA, 25-40 V, 42 W **€ 46.95**

Accessories for **100125**
930666 Surface-mounted frame for 300x1,200 mm panel **€ 69.95**
930671 Recessed frame for 300x1,200 mm backlit panel **€ 69.95**

Accessories for **100139**
930675 Surface-mounted frame for 600x1,200 mm panel **€ 69.95**
930688 Recessed frame for 600x1,200 mm backlit panel **€ 84.95**

Accessories for **100139**, **100154**
930673 Cable suspension for 600x1,200 mm panel **€ 32.95**
862194 BASIC, DIM, Multi CC, IE-75D **€ 84.95**
862259 QUICK, CC, 1,500 mA, 27-42 V, 60 W **€ 56.95**

STANDARD OFFICE

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for office spaces, reception rooms, hallways**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	90 Degree
Colour Temperature	4000 K	Control	Dimmable via optional power supply unit
Luminous Flux	4200 lm	CRI (Ra)	90
Height	9 mm	Rated Current	1050 mA
Power	36 W	IK Protection Class	IK03
Rated Input Voltage	33-38 V/DC	UGR	19
Power Supply Unit incl.	No		


100124

Article	Housing Color		Length	Width	EEI	Price
100138	White	NW	295 mm	1195 mm	G	**€ 129.95**
100124	White	NW	620 mm	620 mm	F	**€ 124.95**

CC | IP40 | 1 CH

Accessories

930672	Cable suspension for 620x620/300x1,200 mm panel		**€ 22.95**
930674	Safety cable		**€ 4.95**
862258	QUICK, CC, 1,050 mA, 25-40 V, 42 W		**€ 46.95**
862193	BASIC, DIM, Multi CC, IE-45HD		**€ 69.95**

Accessories for **100124**

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930670	Recessed frame for 620x620 mm backlit panel		**€ 59.95**

Accessories for **100138**

930666	Surface-mounted frame for 300x1,200 mm panel		**€ 69.95**
930671	Recessed frame for 300x1,200 mm backlit panel		**€ 69.95**

STANDARD SANO

The SANO LED panel is a simple and cost-effective solution for refurbishing old T5/T8 louvre luminaires. With its slimline design, it can be seamlessly integrated into existing installations without having to make any additional adjustments.

Thanks to its BEG eligibility, this SANO insert panel is not only a sustainable but also an economically attractive solution. It provides uniform illumination with high colour rendering and minimizes glare, which is particularly important in commercial environments.

STANDARD SANO

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Renovation solution for T5/T8 louver lights**
- **Can be combined with a power supply unit as desired [excl.]**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium, Polycarbonate	Rated Input Voltage	35-40 V/DC
		Power Supply Unit incl.	No
Colour Temperature	4000 K	Light Beam Angle	120 Degree
Luminous Flux	4900 lm	Control	Dimmable via optional power supply unit
Length	1495 mm		
Width	295 mm	CRI (Ra)	90
Height	10 mm	Rated Current	1050 mA
Power	33 W	UGR	22

Article	Housing Color		Price
100158	White	NW	**€ 169.95**

CC | IP40 | A ↑ G D

Accessories

930795	Surface-mounted frame for 1,500x300 mm panel	**€ 79.95**
930796	Recessed frame for 1,500x300 mm panel	**€ 69.95**
930673	Cable suspension for 600x1,200 mm panel	**€ 32.95**
930674	Safety cable	**€ 4.95**
862258	QUICK, CC, 1,050 mA, 25-40 V, 42 W	**€ 46.95**

OFFICE FLEX

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for pendant mounting**
- **Suitable for office spaces, reception rooms, hallways**
- **Light colour adjustable in three stages**
- **Suitable for workplaces with screens in accordance with EN 12464-1 BAP65**
- **Microprismatic surface structure**

Application Area
Office / conference, Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Light Beam Angle	100 Degree
Colour Temperature	3000/4000/5700 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	10 mm		
Power	40 W	CRI (Ra)	90
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08
Power Supply Unit incl.	Yes	UGR	19

Article	Housing Color		Luminous Flux	Length	Width	Price
100078	White	WW NW CW	3300 lm	620 mm	620 mm	**€ 179.95**
100079	White	WW NW CW	3500 lm	1195 mm	295 mm	**€ 219.95**



Accessories
862193 BASIC, DIM, Multi CC, IE-45HD **€ 69.95**

Accessories for **100078**
930665 Surface-mounted frame for 620x620 mm panel **€ 59.95**
930670 Recessed frame for 620x620 mm backlit panel **€ 59.95**

Accessories for **100079**
930666 Surface-mounted frame for 300x1,200 mm panel **€ 69.95**
930671 Recessed frame for 300x1,200 mm backlit panel **€ 69.95**



HCL

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for 24 V HCL controllers**
- **Suitable for event spaces/reception rooms, hallways**
- **Low housing depth**

Application Area
Reception / Communication, Corridor / stairwell, Shop / Retail / Sales area, Health / care / hospital / practice, Education / school / lecture theatre, Refurbishment

Housing	Aluminium	Rated Input Voltage	24 V/DC
Colour Temperature	3000-5500 K	Power Supply Unit incl.	No
Luminous Flux	3551 lm	Light Beam Angle	120 Degree
Length	620 mm	Control	Dimmable via optional controller
Width	620 mm		
Height	10 mm	CRI (Ra)	80
Power	49.5 W		



100032

Article	Housing Color	Colour Temperature	Price
100032	White	WW CW 3000-5500 K	**€ 169.95**



Accessories

930665	Surface-mounted frame for 620x620 mm panel		**€ 59.95**
930670	Recessed frame for 620x620 mm backlit panel		**€ 59.95**
862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**
862166	BASIC, CV, Q8H-24-100 W		**€ 96.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**

NEW · hcl · IK05 · Ra>90 · RGB+CCT · UGR<19

STANDARD RGB CCT

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Suitable for event spaces, reception rooms, hallways**
- **Suitable for 24 V colour and HCL controllers**

Application Area
Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

Housing	Aluminium	Light Beam Angle	110 Degree
Colour Temperature	2700-6500 K	Control	Dimmable via optional controller
Luminous Flux	5000 lm		
Height	12.5 mm	CRI (Ra)	90
Power	88 W	IK Protection Class	IK05
Rated Input Voltage	24 V/DC	UGR	19
Power Supply Unit incl.	No		

Article	Housing Color		Length	Width	Price
100160	☐ White	RGB WW CW	595 mm	595 mm	**€ 205.95**
100159	☐ White	RGB WW CW	620 mm	620 mm	**€ 209.95**

CV · IP40 · III · 5 CH · A ↑ G F

Accessories for **100159**

930665	Surface-mounted frame for 620x620 mm panel	**€ 59.95**
930668	Recessed frame for 620x620 mm panel	**€ 57.95**

Accessories for **100160**

930664	Surface-mounted frame for 595x595 mm panel	**€ 54.95**
930667	Recessed frame for 595x595 mm panel	**€ 52.95**
930907	Recessed frame 600x600 for standard panels	**€ 54.95**

STANDARD RGBW

- **For insertion into grid ceilings**
- **Can be installed in surface-mount or flush-mount frames**
- **Powerful and intense colours, incl. pastel tones**
- **Suitable for 24 V colour controllers**
- **Suitable for event spaces, reception rooms, hallways**

Application Area
Reception / Communication, Object lighting / architecture, Wellness / Spa / Gym, Advertising lighting, Hotel / catering, Theatre / event, Refurbishment

Housing	Aluminium	Light Beam Angle	110 Degree
Height	11 mm	Control	Dimmable via optional controller
Power	94 W	CRI (Ra)	90
Rated Input Voltage	24 V/DC		
Power Supply Unit incl.	No		



100152

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Width	Price
100156	White	RGB WW 3000 K	4000 lm	595 mm	595 mm	**€ 184.95**
100152	White	RGB WW 3000 K	4000 lm	620 mm	620 mm	**€ 189.95**
100157	White	RGB NW 4000 K	4200 lm	595 mm	595 mm	**€ 184.95**
100153	White	RGB NW 4000 K	4200 lm	620 mm	620 mm	**€ 189.95**



Accessories

862166	BASIC, CV, Q8H-24-100 W	**€ 96.95**
872091	IP, CV, V6-320-24	**€ 219.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 99.95**
843037	Casambi BT Dimmer CBU-PWM4 (CV, 12-24V, 6A DC)	**€ 179.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 114.95**

Accessories for **100152**, **100153**

930665	Surface-mounted frame for 620x620 mm panel	**€ 59.95**
930668	Recessed frame for 620x620 mm panel	**€ 57.95**

Accessories for **100156**, **100157**

930664	Surface-mounted frame for 595x595 mm panel	**€ 54.95**
930667	Recessed frame for 595x595 mm panel	**€ 52.95**

Accessories for **100157**

930907	Recessed frame 600x600 for standard panels	**€ 54.95**

surface mounted wall lights

page 198

page 199

page 200

page 202

page 204

Ra>90

ACAMAR

Application Area
Reception / Communication, Object lighting / architecture, Home / Living, Hotel / catering

Housing	Aluminium	Power	6.9 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	170 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	105 Degree
Height	80 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	120 mm	CRI (Ra)	90
Base Width	60 mm		
Base Height	33 mm		

Article	Housing Color		Luminous Flux	Price
341196	Black	WW	300 lm	**€ 154.95**
341194	White	WW	390 lm	**€ 154.95**
341195	Silver, White	WW	400 lm	**€ 154.95**

IP20 A ↑ G

APODIS

Application Area
Home / Living, Reception / Communication, Home office / study, Hotel / catering

Housing	Aluminium	Base Height	100 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	76 mm	Power Supply Unit incl.	Yes
Width	61 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	60 mm		
Base Width	18 mm	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Height	Power	Light Beam Angle	Price
341200	Gold, Black	WW	350 lm	500 mm	10.8 W	40 Degree	**€ 229.95**
341201	Rosé, Black	WW	350 lm	500 mm	10.8 W	40 Degree	**€ 229.95**
341202	Gold, Black	WW	450 lm	800 mm	14.7 W	30 Degree	**€ 279.95**
341203	Rosé, Black	WW	450 lm	800 mm	14.7 W	30 Degree	**€ 279.95**



CUBE

Little cube, big effect: The cube emits its light up and down in equal measure, drawing the eye to spacial elements and bringing structure. The compact cube made from concrete or plaster [available in the colour tones beige, grey, dark grey, white and black] with its subdued design has the essentials in focus, assuming a back seat presence.

NEW

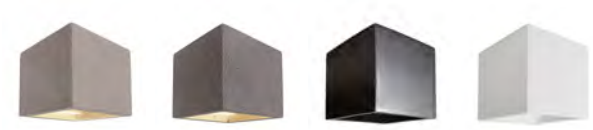

CUBE

- **Exchangeable lamp**
- **A variety of concrete/plaster colour variants**
- **Can be painted over [white variant only]**

Application Area
Home / Living, Hotel / catering

Length	115 mm	Max. Power	1x max. 25 W
Width	115 mm	Rated Input Voltage	220-240 V/AC
Height	115 mm	Control	Dimmable via optional light source
Base Length	57 mm		
Base Width	57 mm	Colour of Light Output	White
Base Height	63 mm		

Article	Housing Color	Housing	Paintable	Price
341183	Grey	Concrete		**€ 69.95**
341184	Dark grey	Concrete		**€ 69.95**
341250	Black	Plaster		**€ 72.95**
341249	White	Plaster	Yes	**€ 72.95**

NEW

CAN IP20

- **Customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Max. Power	1x max. 7.5 W
Length	72 mm	Rated Input Voltage	220-240 V/AC
Height	125 mm	Control	Dimmable via optional light source
Ø	60 mm		

Article	Housing Color	Price
341341	White	**€ 44.95**
341342	Black	**€ 44.95**

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

page 46 page 88 page 90 page 92 page 414

CAN UP & DOWN IP20

The CAN wall light provides versatile lighting options for various commercial and private projects. The up/down variant with light emission on both sides can be adapted perfectly to individual room concepts. The GU10 base enables simple replacement of the lamp, while the screw-on cylinder allows tool-free access. Installation for rigid and flexible conductors is particularly easy due to the integrated push terminals. Individual accents can be created with the optional, interchangeable decorative rings. The CAN wall light is part of a comprehensive series and is also available as a pendant, ceiling, reading and outdoor light.

NEW

CAN UP & DOWN IP20

- **Customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Max. Power	2x max. 7.5 W
Length	72 mm	Rated Input Voltage	220-240 V/AC
Height	230 mm	Control	Dimmable via optional light source
Ø	60 mm		

Article	Housing Color	Price
341343	White	**€ 54.95**
341344	Black	**€ 54.95**

GU10 | IP20

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

Seite 46 Seite 88 Seite 92 Seite 93 Seite 414

built in wall lights

page 208

page 210

page 212

page 214

page 215

ALWAID PRO

- **integrated power supply unit for 230V direct connection**
- **through-wiring possible**
- **dimmable via leading edge/trailing edge phase**
- **suitable for 68 mm switch boxes of normal and deep design**

Housing	Aluminium, Polycarbonate	Installation Depth	39 mm
		Cut Out Ø	68 mm
Height	41 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	71.5 mm		
Power	4 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
Power Supply Unit incl.	Yes	Light Direction	Front

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565733	White	WW 2700 K	610 lm	**€ 59.95**
565734	White	WW 3000 K	630 lm	**€ 59.95**

IP20 A↑G E

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

NEW

ALWAID PRO

Article	Housing Color	Housing	Housing shape	Light cone	L x W	Height	Ø	Price
931013	White	Aluminium	round	triangular		18 mm	71.5 mm	**€ 12.95**
931015	Black	Aluminium	round	triangular		18 mm	71.5 mm	**€ 12.95**
931025	White	Aluminium	round	narrow		18 mm	75 mm	**€ 12.95**
931027	Black	Aluminium	round	narrow		18 mm	75 mm	**€ 12.95**
931007	White	Aluminium	angular	triangular	75 x 75 mm	18 mm		**€ 12.95**
931009	Black	Aluminium	angular	triangular	75 x 75 mm	18 mm		**€ 12.95**
931019	White	Aluminium	angular	narrow	75 x 75 mm	18 mm		**€ 12.95**
931021	Black	Aluminium	angular	narrow	75 x 75 mm	18 mm		**€ 12.95**
931037	White	Glass / Polycarbonate	round	semicircular		23 mm	78 mm	**€ 18.95**
931039	Black	Glass / Polycarbonate	round	semicircular		23 mm	78 mm	**€ 18.95**
931031	White	Glass / Polycarbonate	angular	square	78 x 78 mm	23 mm		**€ 18.95**
931033	Black	Glass / Polycarbonate	angular	square	78 x 78 mm	23 mm		**€ 18.95**

IP20

ALWAID PRO MOTION

- **integrated power supply unit for 230V direct connection**
- **with motion detector**
- **through-wiring possible**
- **power adjustable in 2 stages**
- **suitable for 68 mm switch boxes of normal and deep design**

Housing	Aluminium, Polycarbonate	Power Supply Unit incl.	Yes
Height	41 mm	Installation Depth	39 mm
Ø	71.5 mm	Cut Out Ø	68 mm
Power Selectable	2 W, 4 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK05
		Light Direction	Front

Article	Housing Color	Colour Temperature	Luminous Flux	Price
565736	White	WW 2700 K	610 lm	**€ 64.95**
565737	White	WW 3000 K	630 lm	**€ 64.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

NEW

ALWAID PRO MOTION

Article	Housing Color	Housing	Housing shape	Light cone	L x W	Height	Ø	Price
931016	White	Aluminium	round	triangular		18 mm	71.5 mm	**€ 15.95**
931018	Black	Aluminium	round	triangular		18 mm	71.5 mm	**€ 15.95**
931028	White	Aluminium	round	narrow		18 mm	75 mm	**€ 15.95**
931030	Black	Aluminium	round	narrow		18 mm	75 mm	**€ 15.95**
931010	White	Aluminium	angular	triangular	75 x 75 mm	18 mm		**€ 15.95**
931012	Black	Aluminium	angular	triangular	75 x 75 mm	18 mm		**€ 15.95**
931022	White	Aluminium	angular	narrow	75 x 75 mm	18 mm		**€ 15.95**
931024	Black	Aluminium	angular	narrow	75 x 75 mm	18 mm		**€ 15.95**
931040	White	Glass / Polycarbonate	round	semicircular		23 mm	78 mm	**€ 21.95**
931042	Black	Glass / Polycarbonate	round	semicircular		23 mm	78 mm	**€ 21.95**
931034	White	Glass / Polycarbonate	angular	square	78 x 78 mm	23 mm		**€ 21.95**
931036	Black	Glass / Polycarbonate	angular	square	78 x 78 mm	23 mm		**€ 21.95**

IP20

ALWAID 2

The ALWAID 2 recessed wall light fits into any 68 mm standard or deep switch box thanks to its compact design. Furthermore, it does not require an additional power supply. The variety of covers allows you to find a style that suits your space and illuminates your surroundings with beautiful indirect light. The article includes the base only; covers are not included in the scope of delivery.

ALWAID 2

- **230 V direct connection**
- **Feed-through wiring possible**
- **Can be dimmed using leading-edge phase dimmers or trailing-edge phase dimmers**
- **Suitable for 68 mm standard and deep switch boxes**

Application Area
Home / Living, Corridor / stairwell, Hotel / catering, Stairs / steps

Housing	Aluminium	Installation Depth	39.9 mm
Height	39.9 mm	Light Beam Angle	100 Degree
Ø	71.2 mm	Cut Out Ø	61.5 mm
Power	4.8 W	Control	Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes		



563010

Article	Housing Color	Colour Temperature	Luminous Flux	Price
563009	White	WW 2700 K	200 lm	**€ 49.95**
563010	White	WW 3000 K	215 lm	**€ 49.95**
563011	White	NW 4000 K	230 lm	**€ 49.95**

IP20

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

NEW

ALWAID II - ANGULAR COVER

- **A variety of shapes and colours for every application**
- **Ideally suited as a staircase light or night light**
- **Glass covers for soft, glare-free light**
- **Aluminium covers for different light cones**

Article	Housing Color	Housing	light output	Length	Width	Height	Price
930485	White	Aluminium	step	75 mm	75 mm	19 mm	**€ 14.95**
930486	Light gray	Aluminium	step	75 mm	75 mm	19 mm	**€ 14.95**
930487	Black	Aluminium	step	75 mm	75 mm	19 mm	**€ 14.95**
930491	White	Aluminium	round	75 mm	75 mm	19.1 mm	**€ 14.95**
930492	Light gray	Aluminium	round	75 mm	75 mm	19.1 mm	**€ 14.95**
930493	Black	Aluminium	round	75 mm	75 mm	19.1 mm	**€ 14.95**
930482	White	Aluminium	square	75 mm	75 mm	19.8 mm	**€ 14.95**
930483	Light gray	Aluminium	square	75 mm	75 mm	19.8 mm	**€ 14.95**
930484	Black	Aluminium	square	75 mm	75 mm	19.8 mm	**€ 14.95**
930488	White	Aluminium	trapeze	75 mm	75 mm	19.8 mm	**€ 14.95**
930489	Light gray	Aluminium	trapeze	75 mm	75 mm	19.8 mm	**€ 14.95**
930490	Black	Aluminium	trapeze	75 mm	75 mm	19.8 mm	**€ 14.95**
930480	White	Glass	milky	78.2 mm	78.2 mm	22.9 mm	**€ 19.95**
930842	Black	Glass	milky	78.2 mm	78.2 mm	22.9 mm	**€ 19.95**
930860	Light gray	Glass	milky	78.2 mm	78.2 mm	22.9 mm	**€ 23.74**

IP20

NEW

ALWAID II - ROUND COVER

- **A variety of shapes and colours for every application**
- **Ideally suited as a staircase light or night light**
- **Glass covers for soft, glare-free light**
- **Aluminium covers for different light cones**

Article	Housing Color	Housing	light output	Height	Ø	Price
930497	White	Aluminium	step	19 mm	75 mm	**€ 14.95**
930498	Light gray	Aluminium	step	19 mm	75 mm	**€ 14.95**
930499	Black	Aluminium	step	19 mm	75 mm	**€ 14.95**
930500	White	Aluminium	round	19.8 mm	75 mm	**€ 14.95**
930501	Light gray	Aluminium	round	19.8 mm	75 mm	**€ 14.95**
930502	Black	Aluminium	round	19.8 mm	75 mm	**€ 14.95**
930503	White	Aluminium	square	19.8 mm	75 mm	**€ 14.95**
930504	Light gray	Aluminium	square	19.8 mm	75 mm	**€ 14.95**
930505	Black	Aluminium	square	19.8 mm	75 mm	**€ 14.95**
930494	White	Aluminium	trapeze	20.4 mm	74.9 mm	**€ 14.95**
930495	Light gray	Aluminium	trapeze	20.4 mm	74.9 mm	**€ 14.95**
930496	Black	Aluminium	trapeze	20.4 mm	74.9 mm	**€ 14.95**
930481	White	Glass	milky	22.8 mm	78 mm	**€ 19.95**
930843	Black	Glass	milky	22.8 mm	78 mm	**€ 19.95**
930861	Light gray	Glass	milky	22.8 mm	78 mm	**€ 19.95**

IP20

reading lights

page 218

page 219

page 220

page 222

BRAHE ROUND

The BRAHE wall light with indirect lighting and narrow light emission angle of 25° means anyone else in the bed can sleep peacefully while the person on the other side is still reading. The simple design of the BRAHE also impresses in other areas, such as reading nooks.

page 232

page 233

BRAHE ROUND

·Direct and indirect lighting can be switched on separately

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Height	110 mm	Light Beam Angle	25 Degree
Ø	150 mm	Swivelling Angle	360 Degree
Power	8.5 W	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Price
341243	Black	WW	395 lm	**€ 104.95**
341242	White	WW	490 lm	**€ 104.95**



BRAHE ANGULAR

·High-quality, flexible gooseneck
·Gooseneck with silicone sleeve for easy cleaning
·Individually adjustable via flexible gooseneck

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Base Height	25 mm
Colour Temperature	3000 K	Power	3.3 W
Length	310 mm	Rated Input Voltage	100-240 V/AC
Height	80 mm	Power Supply Unit incl.	Yes
Ø	25 mm	Light Beam Angle	25 Degree
Base Length	80 mm	Swivelling Angle	360 Degree
Base Width	80 mm	CRI (Ra)	80



341236

Article	Housing Color		Luminous Flux	Price
341237	Black	WW	165 lm	**€ 64.95**
341236	White	WW	175 lm	**€ 67.95**



CAN TILT SQUARE

The square CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341339 and 341340 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.

NEW

CAN TILT SQUARE

- **Flat and discreet lamp base**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be customised with a wide range of accessories**
- **Can be combined with the comprehensive product family of the CAN series**
- **Can be charged via USB-C/USB-A [art. nos. 341339 and 341340 only]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Max. Power	1x max. 7.5 W
Length	102 mm	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Width	100 mm	Rotation Angle	355 Degree
Base Height	100 mm	Swivelling Angle	90 Degree

Article	Housing Color	Charging connection	Price
341337	White		**€ 49.95**
341338	Black		**€ 49.95**
341339	White	1 x USB type A / 1 x USB type C	**€ 69.95**
341340	Black	1 x USB type A / 1 x USB type C	**€ 69.95**

Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

page 46 page 88 page 90 page 92 page 414

CAN TILT ROUND

The round CAN reading light is the ideal choice for modern hotel rooms and sophisticated living spaces. It offers a convenient charging option for smartphones and other devices via USB-C and USB-A (article no. 341335 and 341336 only). The widely used GU10 base enables the quick replacement of the lamp, while the screw-on cylinder housing allows tool-free access. Individual accents can be set with the optional, replaceable decorative rings. The CAN reading light is part of a versatile lighting family, which is also available as a pendant, ceiling, wall and outdoor light.

NEW

CAN TILT ROUND

- **Flat and discreet lamp base**
- **Can be customised with a wide range of accessories**
- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**
- **Can be charged via USB-C/USB-A [art. nos. 341335 and 341336 only]**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	102 mm	Control	Dimmable via optional light source
Height	105 mm		
Ø	60 mm	Rotation Angle	355 Degree
Base Ø	100 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		

Article	Housing Color	Charging connection	Price
341333	White		**€ 49.95**
341334	Black		**€ 49.95**
341335	White	1 x USB type A / 1 x USB type C	**€ 69.95**
341336	Black	1 x USB type A / 1 x USB type C	**€ 69.95**



Accessories

930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

page 46 page 88 page 90 page 92 page 414

1/3 NEW

CAN TILT SQUARE BASE MIX'N MATCH 1/3

- **flat and discreet light base**
- **charging option via USB-C / USB-A [only item no. 341347 and 341348]**
- **can be customised with cylinder housing in 6 different colours**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Length	100 mm	Rotation Angle	340 Degree
Base Width	100 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		

Article	Housing Color	Price
341345	White	**€ 41.95**
341346	Black	**€ 41.95**
341347	White	**€ 61.95**
341348	Black	**€ 61.95**

1/3 NEW

CAN TILT ROUND BASE MIX'N MATCH 1/3

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	105 mm	Control	Dimmable via optional light source
Ø	60 mm		
Base Ø	100 mm	Rotation Angle	340 Degree
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Charging connection	Price
341349	White		**€ 41.95**
341350	Black		**€ 41.95**
341351	White	1 x USB type A / 1 x USB type C	**€ 61.95**
341352	Black	1 x USB type A / 1 x USB type C	**€ 61.95**

2/3 NEW

CYLINDER HOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	95 mm		

Article	Housing Color	Price
931059	White	**€ 7.95**
931060	Black	**€ 7.95**
931061	Bronze	**€ 18.95**
931062	Brass	**€ 18.95**
931063	Black gray	**€ 18.95**
931064	Rosé	**€ 18.95**

IP20

3/3

REFLECTOR RING CAN SERIES MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 4.95**
930302	Black	**€ 4.95**
930303	Gold	**€ 4.95**
930366	Silver	**€ 4.95**

IP20

table and floor lights

page 228

page 229

page 230

page 230

page 232

page 233

page 234

NEW

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Primary Cable Length	2 m
Height	1115 mm	Primary Connection End	Safety plug
Ø	60 mm	Control	Dimmable via optional light source
Base Ø	252 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Price
343037	White	**€ 129.95**
343038	Black	**€ 129.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

NEW

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Primary Cable Length	2 m
Height	400 mm	Primary Connection End	Safety plug
Ø	60 mm	Control	Dimmable via optional light source
Base Ø	182 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree

Article	Housing Color	Price
346086	White	**€ 95.95**
346087	Black	**€ 95.95**

GU10 | IP20

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

1/3 NEW

CAN BASE MIX'N MATCH 1/3

- **customisable with extensive accessories**
- **individual lighting solution thanks to interchangeable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Primary Connection End	Safety plug
Height	1115 mm	Control	Dimmable via optional light source
Base Ø	252 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree
Primary Cable Length	2 m		

Article		Housing Color	Price
343039	☐	White	**€ 121.95**
343040	■	Black	**€ 121.95**

GU10 | IP20

1/3 NEW

CAN BASE MIX'N MATCH 1/3

Housing	Aluminium	Primary Connection End	Safety plug
Height	400 mm	Control	Dimmable via optional light source
Base Ø	182 mm		
Max. Power	1x max. 7.5 W	Rotation Angle	340 Degree
Rated Input Voltage	220-240 V/AC	Swivelling Angle	90 Degree
Primary Cable Length	2 m		

Article		Housing Color	Price
346088	☐	White	**€ 87.95**
346089	■	Black	**€ 87.95**

GU10 | IP20

2/3 NEW

CYLINDER HOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	95 mm		

Article	Housing Color	Price
931059	White	**€ 7.95**
931060	Black	**€ 7.95**
931061	Bronze	**€ 18.95**
931062	Brass	**€ 18.95**
931063	Black gray	**€ 18.95**
931064	Rosé	**€ 18.95**

IP20

3/3

REFLECTOR RING CAN SERIES MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 4.95**
930302	Black	**€ 4.95**
930303	Gold	**€ 4.95**
930366	Silver	**€ 4.95**

IP20

BRAHE

- **Can be rotated and swivelled**
- **Direct and indirect lighting can be switched on separately**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	25 Degree
Height	455 mm	Swivelling Angle	90 Degree
Ø	150 mm	Primary Connection End	Power plug IP20
Power	8.5 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		

Article	Housing Color		Luminous Flux	Price
346016	Black	ww	370 lm	**€ 155.95**
346015	White	ww	470 lm	**€ 155.95**



page 218 page 219

BRAHE

- **Can be rotated and swivelled**
- **Direct and indirect lighting can be switched on separately**

Application Area
Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	530 lm	Light Beam Angle	25 Degree
Height	1387 mm	Swivelling Angle	90 Degree
Ø	305 mm	Primary Connection End	Power plug IP20
Power Selectable	3 W, 8 W	CRI (Ra)	80

Article	Housing Color		Price
343025	White	WW	**€ 259.95**
343026	Black	WW	**€ 259.95**

page 218 page 219

ADHARA

Classic design interpreted in a modern way - the ADHARA made from aluminium captivates with its classic lines, ultra-modern materials and high degree of flexibility. The ADHARA can be optimally adjusted to any situation via its two or three joints. Its powerful LED module delivers 950 lumens and can also be dimmed thanks to a touch sensor. Whether for the boss's office or for a child's desk, the ADHARA looks great anywhere.

ADHARA

- **Can be rotated and swivelled via joints**
- **Dimmable in three stages using touch sensor**

Application Area
Home / Living, Reception / Communication, Home office / study

Housing	Aluminium	Power	12 W
Colour Temperature	3000 K	Rated Input Voltage	100-240 V/AC
Luminous Flux	950 lm	Power Supply Unit incl.	Yes
Length	498 mm	Light Beam Angle	120 Degree
Height	480 mm	Swivelling Angle	180 Degree
Ø	150 mm	Primary Cable Length	1.6 m
Base Height	21.5 mm	Primary Connection End	Power plug
Base Ø	180 mm	CRI (Ra)	80

Article	Housing Color		Price
346026	Black	WW	**€ 199.95**
346027	White	WW	**€ 199.95**
346028	Silver	WW	**€ 199.95**



showcase lights

page 239

page 240

page 242

page 243

HERCULIS

Small helpers, big effect. With HERCULIS display luminaires in high-quality aluminium housings, you can reach all corners of a showcase. The luminaire head with its 40° beam angle can be freely rotated and swivelled in any direction. In addition, the intelligent cable routing and the ready-to-plugin system allow easy surface and recessed mounting in showcases, counters, sales areas or in the living room.

Ra>90

HERCULIS MAGNETIC

- **High output with compact design**
- **Magnetic lamp head**
- **Ball head allows lamp to be directed as desired**
- **For surface mounting**
- **Ready-to-use system**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	3 V/DC
Height	42.2 mm	Rated Current	350 mA
Ø	31 mm	Power Supply Unit incl.	No
Base Height	5 mm	Light Beam Angle	40 Degree
Base Ø	31 mm	Swivelling Angle	180 Degree
Power	1 W	CRI (Ra)	90



688026

Article	Housing Color	Colour Temperature	Luminous Flux	Price
688025	Black	WW 3000 K	100 lm	**€ 59.95**
688026	Silver	WW 3000 K	100 lm	**€ 59.95**
688027	Black	NW 4000 K	105 lm	**€ 59.95**
688028	Silver	NW 4000 K	105 lm	**€ 59.95**



Accessories

930594	LED power supply incl. 3-way distributor for Herculis		**€ 32.95**
930592	LED power supply incl. 6-way distributor for Herculis		**€ 39.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Ra>90

HERCULIS SINGLE

- **High output with compact design**
- **Rotating and swivelling head**
- **For panel and surface mounting due to intelligent cable routing**
- **Ready-to-use system**
- **Available in two sizes**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	3 V/DC
Luminous Flux	100 lm	Rated Current	350 mA
Ø	39.2 mm	Power Supply Unit incl.	No
Base Height	4.5 mm	Light Beam Angle	30 Degree
Base Ø	39.2 mm	Swivelling Angle	350 Degree
Power	1 W	CRI (Ra)	90



688029

Article	Housing Color	Colour Temperature	Height	Price
688029	Black	WW 3000 K	150 mm	**€ 82.95**
688030	Silver	WW 3000 K	150 mm	**€ 82.95**
688034	Black	WW 3000 K	250 mm	**€ 83.95**
688035	Silver	WW 3000 K	250 mm	**€ 83.95**
688031	Black	NW 4000 K	150 mm	**€ 82.95**
688033	Silver	NW 4000 K	150 mm	**€ 82.95**
688036	Black	NW 4000 K	250 mm	**€ 83.95**
688037	Silver	NW 4000 K	250 mm	**€ 83.95**

Accessories

930594	LED power supply incl. 3-way distributor for Herculis	**€ 32.95**
930592	LED power supply incl. 6-way distributor for Herculis	**€ 39.95**

Ra>90

HERCULIS DOUBLE

- **High performance with compact design**
- **Rotating and swivelling heads**
- **for recessed and surface mounting thanks to intelligent cable routing**
- **Ready-to-plug-in system**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	6 V/DC
Height	200 mm	Rated Current	350 mA
Ø	39.2 mm	Power Supply Unit incl.	No
Base Height	4.5 mm	Light Beam Angle	30 Degree
Base Ø	39.2 mm	Swivelling Angle	350 Degree
Power	2 W	CRI (Ra)	90



688038

Article	Housing Color	Colour Temperature	Luminous Flux	Price
688038	Black	WW 3000 K	185 lm	**€ 119.95**
688039	Silver	WW 3000 K	185 lm	**€ 119.95**
688040	Black	NW 4000 K	195 lm	**€ 119.95**
688041	Silver	NW 4000 K	195 lm	**€ 119.95**



Accessories

930594	LED power supply incl. 3-way distributor for Herculis	**€ 32.95**
930592	LED power supply incl. 6-way distributor for Herculis	**€ 39.95**

Ra>90

HERCULIS TRIPLE

- **High performance with compact design**
- **Rotating and swivelling heads**
- **for recessed and surface mounting thanks to intelligent cable routing**
- **Ready-to-plug-in system**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	9 V/DC
Height	250 mm	Rated Current	350 mA
Ø	39.2 mm	Power Supply Unit incl.	No
Base Height	4.5 mm	Light Beam Angle	30 Degree
Base Ø	39.2 mm	Swivelling Angle	350 Degree
Power	3 W	CRI (Ra)	90



688042

Article	Housing Color	Colour Temperature	Luminous Flux	Price
688042	Black	WW 3000 K	263 lm	**€ 139.95**
688043	Silver	WW 3000 K	294 lm	**€ 139.95**
688044	Black	NW 4000 K	290 lm	**€ 139.95**
688045	Silver	NW 4000 K	290 lm	**€ 139.95**

Accessories

930594	LED power supply incl. 3-way distributor for Herculis	**€ 32.95**
930592	LED power supply incl. 6-way distributor for Herculis	**€ 39.95**

office lights

page 246

page 248

page 250

page 252

page 254

page 256

page 264

page 265

page 266

page 267

ROUND TRANSPARENT LED PANEL

The LED pendant light is equipped with a transparent acrylic glass pane for soft direct and indirect light distribution, which is almost transparent when switched off. When switched on, the pane distributes the light almost entirely without glare.
With a glare rating [UGR] of under 22, this pendant light is suitable for various communal or even conference rooms. Bright, efficient and with a sophisticated design, this light not only stands out from all other office equipment, but can also be integrated into any other modern interior.

ROUND TRANSPARENT LED PANEL

- **Eligible for BEG German federal funding for energy-efficient buildings (art. no. 342251/342252/342253 only)**
- **Light colour adjustable in three stages (art. no. 342251/342252/342253 only)**
- **Particularly delicate frame**
- **Low glare value**
- **Transparent luminous element**

Application Area
Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Ø	215 mm
Colour Temperature	3000/3500/4000 K	Power Supply Unit incl.	Yes
Power	50 W	Light Beam Angle	140 Degree
Rated Input Voltage	200-240 V/AC	Light Beam Angle 2	150 Degree
Height	12 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	633 mm		
Pendulum Length	1800 mm	CRI (Ra)	90
Base Height	43 mm	IK Protection Class	IK04



342251

Article	Housing Color		Luminous Flux	Price
342252	Black	WW NW	6000/6100/6100 lm	**€ 419.95**
342253	Light gray	WW NW	6100/6200/6200 lm	**€ 419.95**
342251	White	WW NW	6200/6400/6400 lm	**€ 419.95**

IP40

Accessories

843340	DALI, Triac dimmer, 100-240 V, 400 W, IP20		**€ 74.95**

LED PANEL TRANSPARENT ANGULAR

The LED pendant lamp has transparent glass for direct and indirect light distribution that is almost see-through when switched off. When the light is switched on, the pane distributes the light almost entirely without glare.
This pendant lamp is fully office-compatible with a glare value [UGR] of under 19. Bright, efficient and with a sophisticated design, this light not only stands out in any type of office environment.



LED PANEL TRANSPARENT ANGULAR

- **Very low glare value**
- **Light colour adjustable in 2 stages**
- **Transparent luminous element**
- **Max. suspended mounting 1,800 mm**

Application Area
Reception / Communication, Office / conference, Home / Living, Home office / study, Hotel / catering

Housing	Aluminium	Base Length	570 mm
Colour Temperature	3000/4000 K	Base Width	80 mm
Luminous Flux	5600/6100 lm	Base Height	50 mm
Power	53 W	Power Supply Unit incl.	Yes
Rated Input Voltage	220-240 V/AC	Light Beam Angle	360 Degree
Length	295 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Width	1195 mm		
Height	12 mm	CRI (Ra)	90
Pendulum Length	1800 mm		

Article	Housing Color		Price
342219	Black	WW NW	**€ 299.95**
342220	Light gray	WW NW	**€ 299.95**
342221	White	WW NW	**€ 299.95**

IP40 A↑G E

D PROFESSION DOWN

Due to their flexible control options, you can use the D PROFESSION pendant lamps both in private and in commercial applications. In private settings, the dimmable Down version creates an exceptional atmosphere of illumination that blends perfectly with its modern design.

UGR<19

D PROFESSION DOWN

- **High light output**
- **Very low glare value**
- **Dimmable**
- **Max. suspended mounting 3,000 mm**

Application Area
Office / conference, Home office / study, Reception / Communication

Housing	Aluminium	Pendulum Length	3000 mm
Colour Temperature	4000 K	Base Length	560 mm
Luminous Flux	3165 lm	Base Width	65 mm
Power	28 W	Base Height	38 mm
Rated Input Voltage	200-240 V/AC	Power Supply Unit incl.	Yes
Length	1177.4 mm	Light Beam Angle	24 Degree
Width	53 mm	CRI (Ra)	80
Height	53 mm		



620057

Article	Housing Color		Control	Price
620102	Black	NW	1-10 V	**€ 339.95**
620106	White	NW	1-10 V	**€ 339.95**
620109	Silver	NW	1-10 V	**€ 339.95**
620057	Black	NW	DALI 1.0 / DT6	**€ 359.95**
620105	White	NW	DALI 1.0 / DT6	**€ 359.95**
620108	Silver	NW	DALI 1.0 / DT6	**€ 359.95**
620103	Black	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 329.95**
620107	White	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 329.95**
620110	Silver	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 329.95**

D PROFESSION UP & DOWN

Due to their flexible control options, you can use the D PROFESSION pendant lamps both in private and in commercial applications. The Up and Down version emits its light in two directions. Whilst the LEDs directed upwards generate pleasant, indirect room lighting, the LEDs directed downwards ensure defined, powerful and UGR-compliant office and work lighting for desks and more.

UGR<19

D PROFESSION UP & DOWN

- **High light output**
- **Low glare value**
- **Max. suspended mounting 3,000 mm**
- **Dimmable**

Application Area
Office / conference, Home office / study, Reception / Communication

Housing	Aluminium	Pendulum Length	3000 mm
Colour Temperature	4000 K	Base Length	560 mm
Luminous Flux	7180 lm	Base Width	65 mm
Power	60 W	Base Height	38 mm
Rated Input Voltage	200-240 V/AC	Power Supply Unit incl.	Yes
Length	1177.4 mm	Light Beam Angle	110 Degree
Width	53 mm	Light Beam Angle 2	24 Degree
Height	53 mm	CRI (Ra)	80



620104

Article	Housing Color		Control	Price
620113	Silver	NW	1-10 V	**€ 399.95**
620114	White	NW	1-10 V	**€ 399.95**
620115	Black	NW	1-10 V	**€ 399.95**
620116	Silver	NW	DALI 1.0 / DT6	**€ 429.95**
620117	White	NW	DALI 1.0 / DT6	**€ 429.95**
620118	Black	NW	DALI 1.0 / DT6	**€ 429.95**
620104	Silver	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 399.95**
620111	White	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 399.95**
620112	Black	NW	Leading-edge dimmer / Trailing-edge dimmer	**€ 399.95**

OFFICE THREE

The pendant lamp is an appropriate addition to the OFFICE THREE MOTION standing lamp. As the glare value is under 10, this sophisticated light can be thought of as being almost entirely glare-free. The LEDs directed upwards create room lighting, whilst the LEDs directed downwards emit clearly defined and powerful light onto the work area.

OFFICE THREE

- **Very low UGR value**
- **High luminous flux**
- **Controlled using DALI 2.0**
- **Including uplight for indirect light**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Base Length	600 mm
Colour Temperature	4000 K	Base Width	56.5 mm
Luminous Flux	7000 lm	Base Height	35 mm
Power	60 W	Power Supply Unit incl.	Yes
Rated Input Voltage	200-240 V/AC	Light Beam Angle	115 Degree
Length	1179 mm	Light Beam Angle 2	55 Degree
Width	64 mm	Control	DALI 2 / DT6
Height	35 mm	CRI (Ra)	80
Pendulum Length	2500 mm		

Article	Housing Color		Price
342146	Silver	NW	**€ 599.95**
342147	White	NW	**€ 599.95**

IP20 A↑G E

UGR<19

OFFICE ONE

- **Very low glare value**
- **Service life 50,000 h L80B10**
- **Dimmable using touch sensor**
- **Ready to use**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	610 mm	Power Supply Unit incl.	Yes
Width	310 mm	Light Beam Angle	110 Degree
Height	1950 mm	Light Beam Angle 2	90 Degree
Base Length	460 mm	Primary Cable Length	1.5 m
Base Width	300 mm	Primary Connection End	Power plug
Base Height	8 mm	CRI (Ra)	80
Power	80 W		



343030

Article	Housing Color	Colour Temperature	Luminous Flux	Price
343034	Silver	WW 3000 K	6700 lm	**€ 819.95**
343030	Silver	NW 4000 K	7400 lm	**€ 819.95**

IP20 A↑G F

UGR<19

OFFICE ONE MOTION

- **Very low glare value**
- **Service life 50,000 h L80B10**
- **Dimmable using touch sensor**
- **Motion sensor**
- **Ready to use**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	610 mm	Power Supply Unit incl.	Yes
Width	310 mm	Light Beam Angle	110 Degree
Height	1950 mm	Light Beam Angle 2	90 Degree
Base Length	460 mm	Primary Cable Length	1.5 m
Base Width	300 mm	Primary Connection End	Power plug
Base Height	8 mm	CRI (Ra)	80
Power	80 W	Motion Detector	Yes

Article	Housing Color	Colour Temperature	Luminous Flux	Price
343035	Silver	WW 3000 K	6700 lm	**€ 949.95**
343032	Silver	NW 4000 K	7400 lm	**€ 949.95**

DELL

OFFICE ONE TRANSPARENT

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	55 W
Colour Temperature	4000 K	Rated Input Voltage	200-240 V/AC
Luminous Flux	6245 lm	Power Supply Unit incl.	No
Length	610 mm	Light Beam Angle	150 Degree
Width	310 mm	Light Beam Angle 2	150 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	500 mm	Primary Connection End	Power plug
Base Width	225 mm	CRI (Ra)	80
Base Height	8 mm		

Article	Housing Color		Price
343022	Silver	NW	**€ 819.95**





page 248

UGR<19

OFFICE TWO

- **Very low glare value**
- **Service life 50,000 h L80B10**
- **Dimmable using rotary switch**
- **Ready to use including 2.5 m connecting cable**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	4000 K	Power Supply Unit incl.	No
Luminous Flux	8300 lm	Light Beam Angle	110 Degree
Length	610 mm	Light Beam Angle 2	90 Degree
Width	280 mm	Primary Cable Length	2.5 m
Height	1950 mm	Primary Connection End	Power plug
Power	80 W	CRI (Ra)	80

Article	Housing Color		Price
343016	Silver	NW	**€ 749.95**

IP20 A↑G E

OFFICE THREE

The OFFICE THREE series is our bestseller and problem solver for lighting individual workstations. Available as a free-standing or table lamp, the OFFICE THREE impresses with excellent light quality [Ra95] and glare-free [UGR<6] and ensures fatigue-free working in any situation. Thanks to the individually adjustable brightness for direct and indirect light, OFFICE THREE enables high-quality and flexible illumination of individual workstations. Optimised for tables with standard dimensions of 160 x 80 cm, the series is also suitable for other table sizes.

High-precision radar presence detector

- The 24Ghz presence sensor recognises even the smallest movements on the desk - such as movements of the computer mouse - and switches the light on automatically. Faulty switch-offs are effectively prevented despite the short run-on time.
- Without movement, the brightness is reduced to 30% after 5*/15/30 minutes [*default setting].
- If there is no movement, the light switches off after a further 5*/15/30 minutes [*default setting].

Daylight sensor

- Switch on the light and dim to the desired brightness [this setting is saved by the daylight sensor as the default].
- As soon as the ambient light changes, the sensor adjusts the brightness according to the stored standard [10% tolerance].

Touch panel

- Brightness of direct and indirect light separately or synchronised, infinitely adjustable
- Direct and indirect light can be switched separately
- Continuously adjustable light colour [PRO models only]
- Adjustable run-on time of the presence sensor

Universal table clamp

- table clamp can be used for table tops with a total thickness of 15-65 mm [incl. substructure] as required
- If part of the frame construction runs in the clamping area of the luminaire, the hard rubber buffers supplied must be used to compensate for the unevenness and create a flush clamping area.
- The universal design of the table clamp allows it to be mounted on almost all table tops.

Optional mounting kit

- For larger table tops or for free positioning on the table, the optional mounting kit can be used instead of the pre-installed table clamp. This is simply mounted through a drill hole in the table.
- suitable for table tops with a total thickness of 15-35 mm
- suitable for hole diameters from 22-30 mm

OFFICE THREE STANDARD FLOOR

- **Ideal for high-quality illumination of individual workstations**
- **Redesigned and extended lamp head for optimal illumination of 160x80 cm tables**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **Light colour adjustable via touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	10100 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	530 mm	Primary Connection End	Safety plug
Base Width	225 mm	CRI (Ra)	95
Base Height	10 mm	Motion Detector	Yes

Article	Housing Color		Price
342228	White	NW	**€ 1249.95**
342229	Light gray	NW	**€ 1249.95**
342230	Black	NW	**€ 1249.95**

IP20

OFFICE THREE STANDARD TABLE

- **Ideal for high-quality illumination of height-adjustable individual workstations**
- **Newly designed and extended lamp head for ideal illumination of 160x80 cm tables**
- **Suitable for table designs with 15-65 mm thickness**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Adjustable switch-off delay of the sensor [5/15/30 mins]**
- **Daylight sensor for dynamic brightness adjustment**
- **Incl. 2.5 m connecting cable with safety plug and C21 mains plug**
- **Incl. hard rubber buffers for lining table designs running close to the edge**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	4000 K	Power Supply Unit incl.	Yes
Luminous Flux	10100 lm	Light Beam Angle	120 Degree
Length	1159 mm	Light Beam Angle 2	50 Degree
Width	64 mm	Primary Cable Length	2.5 m
Height	1194 mm	Primary Connection End	Safety plug
Base Length	500 mm	CRI (Ra)	95
Base Width	225 mm	Motion Detector	Yes
Power	80 W		

Article	Housing Color		Price
346063	White	NW	**€ 1049.95**
346064	Light gray	NW	**€ 1049.95**
346065	Black	NW	**€ 1049.95**

IP20

Accessories for **346063**
930727 Assembly kit for table lamp Office Three **€ 39.95**

Accessories for **346064**
930728 Assembly kit for table lamp Office Three **€ 39.95**

Accessories for **346065**
930729 Assembly kit for table lamp Office Three **€ 39.95**

OFFICE THREE PRO FLOOR

- **Ideal for high-quality illumination of individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Adjustable switch-off delay of the sensor [5/15/30 mins]**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Power	80 W
Colour Temperature	2700-6500 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	9000/9800 lm	Power Supply Unit incl.	Yes
Length	1240 mm	Light Beam Angle	120 Degree
Width	64 mm	Light Beam Angle 2	50 Degree
Height	1950 mm	Primary Cable Length	2.5 m
Base Length	530 mm	Primary Connection End	Safety plug
Base Width	225 mm	CRI (Ra)	95
Base Height	10 mm	Motion Detector	Yes

Article	Housing Color		Price
342231	White	WW CW	**€ 1459.95**
342232	Light gray	WW CW	**€ 1459.95**
342233	Black	WW CW	**€ 1459.95**

IP20

OFFICE THREE PRO TABLE

- **Ideal for high-quality illumination of height-adjustable individual workstations**
- **Redesigned and extended lamp head for ideal illumination of 160 x 80 cm tables**
- **Suitable for table designs with 15-65 mm thickness**
- **Direct and indirect light can be dimmed and switched separately using touch panel**
- **Light colour adjustable via touch panel**
- **High-precision radar presence detector detects the smallest movements**
- **Daylight sensor for dynamic brightness adjustment**

Application Area
Reception / Communication, Office / conference, Home office / study, Education / school / lecture theatre

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	2700-6500 K	Power Supply Unit incl.	Yes
Luminous Flux	9000/9800 lm	Light Beam Angle	120 Degree
Length	1240 mm	Light Beam Angle 2	50 Degree
Width	64 mm	Primary Cable Length	2.5 m
Height	1194 mm	Primary Connection End	Safety plug
Base Length	500 mm	CRI (Ra)	95
Base Width	225 mm	Motion Detector	Yes
Power	80 W		

Article	Housing Color		Price
346066	White	WW CW	**€ 1249.95**
346067	Light gray	WW CW	**€ 1249.95**
346068	Black	WW CW	**€ 1249.95**

IP20

Accessories for **346066**
930727 Assembly kit for table lamp Office Three **€ 39.95**

Accessories for **346067**
930728 Assembly kit for table lamp Office Three **€ 39.95**

Accessories for **346068**
930729 Assembly kit for table lamp Office Three **€ 39.95**

hall floodlights

page 270

page 272

page 274

page 277

Goodway

HIGHBAY BASIC

- **cost-effective and powerful**
- **particularly energy-efficient and economical**
- **power adjustable in three stages**
- **light colour adjustable in three stages**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium, Polycarbonate, Steel	Power Selectable	210 W, 160 W, 110 W
Colour Temperature	4000/4500/5700 K	Rated Input Voltage	100-277 V/AC
Luminous Flux	33500/34500/33500 lm	Power Supply Unit incl.	Yes
Height	111 mm	Light Beam Angle	90 Degree
Ø	302 mm	CRI (Ra)	80
		IK Protection Class	IK08

Article	Housing Color		Price
732162	Black	NW CW	**€ 175.95**

IP65

Accessories

930977	60° Lens for Highbay Basic	**€ 19.95**
930978	120° Lens for Highbay Basic	**€ 19.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 14.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 24.95**
930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 39.95**
930571	Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A	**€ 9.95**
930573	Outdoor Y connector for 3 cables 4-14 mm, 3 strands, 0.5-4 mm², 450 V AC/24 A	**€ 10.95**

4
4
5
5
0 1 8
0 1 8
4 - 2 - 1
4 - 2 - 1

HIGHBAY BASIC DALI

- **cost-effective and powerful**
- **particularly energy-efficient and economical**
- **power adjustable in three stages**
- **light colour adjustable in three stages**
- **with Intelli-Data: Dali Parts 251, 252, 253 for luminaire, energy and maintenance data**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium, Polycarbonate, Steel	Power Selectable	210 W, 160 W, 110 W
Colour Temperature	4000/4500/5700 K	Rated Input Voltage	100-277 V/AC
Luminous Flux	33500/34500/33500 lm	Power Supply Unit incl.	Yes
Height	111 mm	Light Beam Angle	90 Degree
Ø	302 mm	Control	DALI 2 / DT6 D4i
		CRI (Ra)	80
		IK Protection Class	IK08

Article	Housing Color		Price
732163	Black	NW CW	**€ 209.95**

Accessories

930977	60° Lens for Highbay Basic	**€ 19.95**
930978	120° Lens for Highbay Basic	**€ 19.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 14.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 24.95**
930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 39.95**
930571	Outdoor cable conn. 2 cables 4-14 mm, 2-5 strands 0.5-4 mm², 450 V AC/24 A	**€ 9.95**

VEGA

The VEGA high-bay light - quality that shines through. The high-bay light is the perfect solution for industrial halls/warehouses where first-class lighting is required. The variant with three selectable output levels can adapt to your requirements. The spotlights are also very energy efficient, which has a positive effect on your operating costs. A long service life of 50,000 hours (L80B20) ensures reliable, no-compromise lighting for a long time to come. With optional lenses, the VEGA spotlights can achieve a UGR value below 19, ensuring glare-free light. We also offer variants with DALI control capability for those wanting precise lighting control. The high-bay lights are also eligible for BEG German federal funding for energy-efficient buildings.

VEGA

- **High-quality, flexible and powerful high-bay lights**
- **Suitable for fire-prone facilities (EN60598-2-24)**
- **Output adjustable in three stages**
- **UGR <19 with optional lens**
- **Particularly energy efficient**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium	Rated Input Voltage	100-277 V/AC
Surface	Powder-coated	Power Supply Unit incl.	Yes
Luminous Flux	15300/23400/28800 lm	Light Beam Angle	120 Degree
		Primary Cable Length	1.5 m
Height	120 mm	CRI (Ra)	80
Ø	400 mm	IK Protection Class	IK09
Power Selectable	90 W, 130 W, 160 W		



732156

Article	Housing Color	Colour Temperature	Price
732156	Black	NW 4000 K	**€ 319.95**
732158	Black	CW 5700 K	**€ 319.95**

Accessories

930742	Wall assembly arm for Vega OnOff, Highbay Basic	**€ 39.95**
930743	60° lens for Vega	**€ 49.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 14.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 24.95**

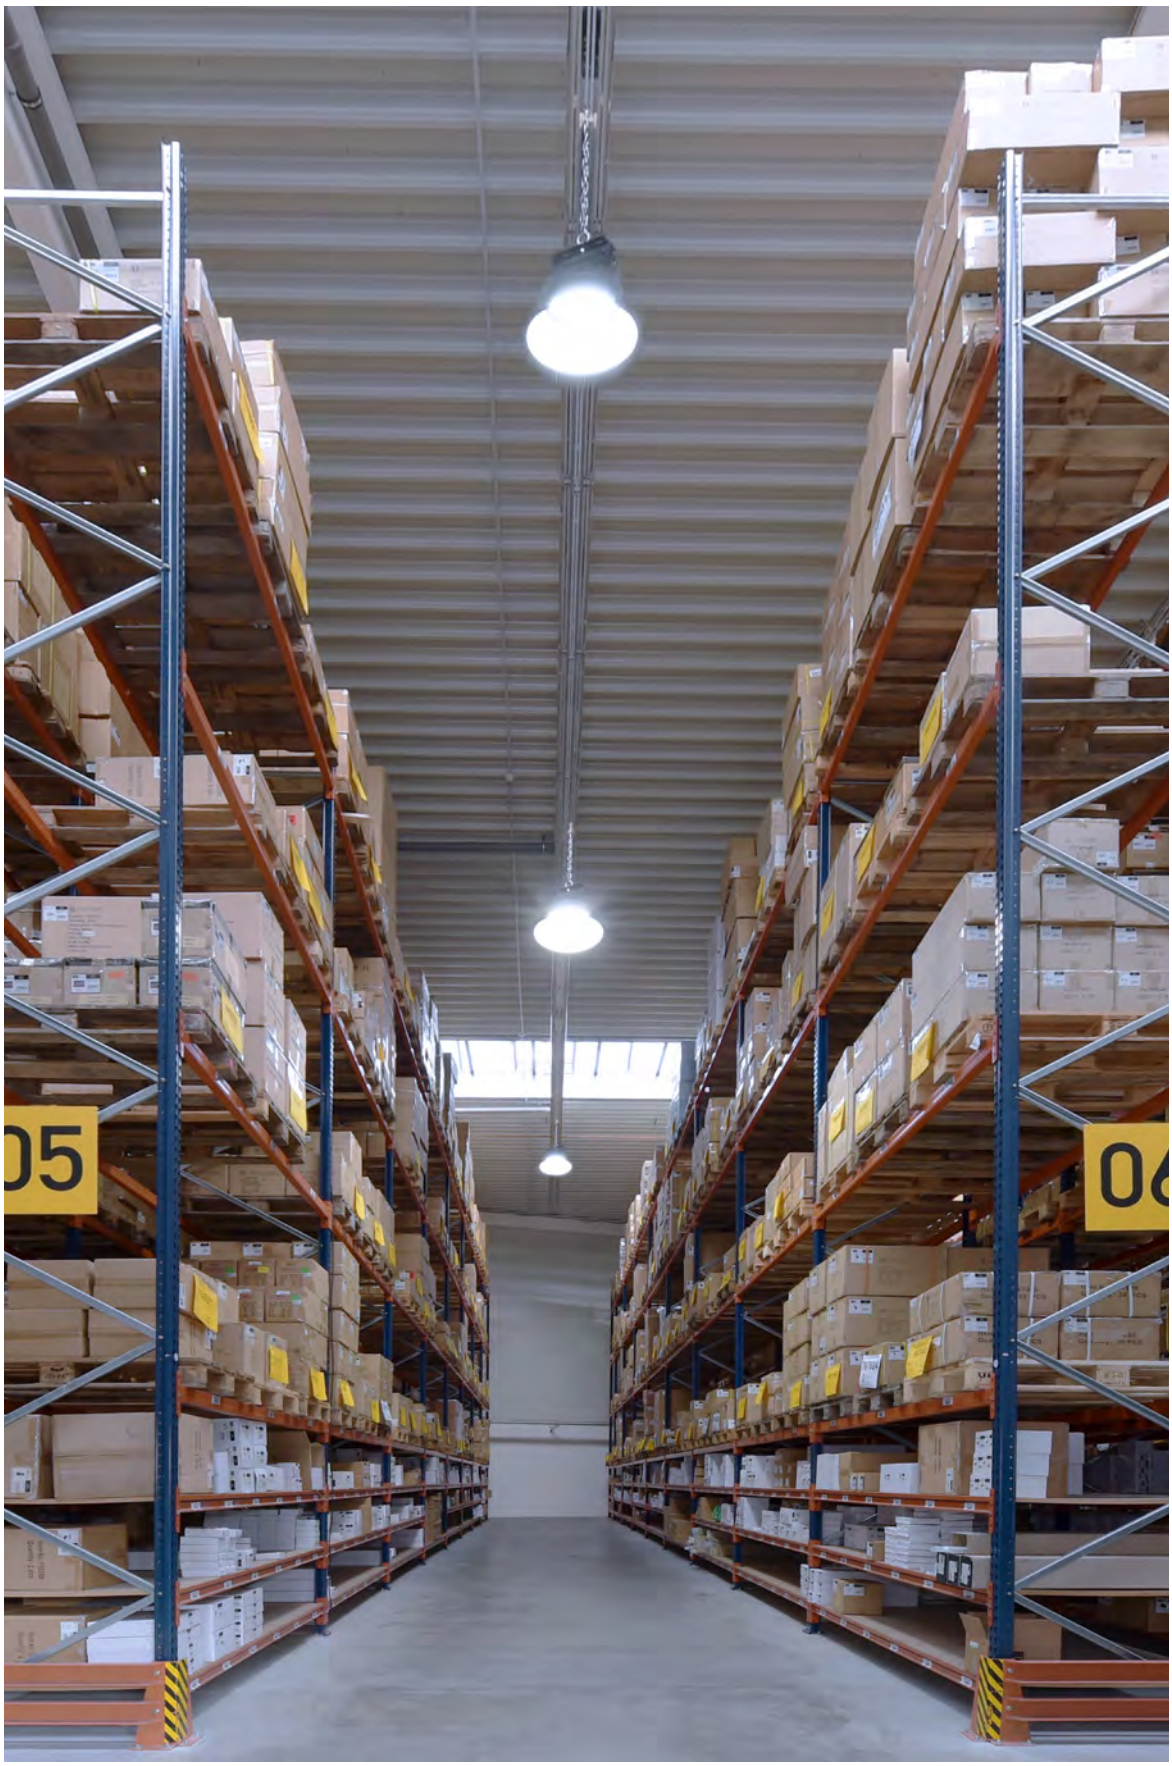
05
04

VEGA DALI

- **High-quality, flexible and powerful high-bay lights**
- **Suitable for fire-prone facilities (EN60598-2-24)**
- **UGR <19 with optional lens**
- **Particularly energy efficient**

Application Area
Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse

Housing	Aluminium	Power Supply Unit incl.	Yes
Surface	Powder-coated	Light Beam Angle	120 Degree
Luminous Flux	28800 lm	Control	DALI 2 / DT6
Height	122 mm	Primary Cable Length	1.5 m
Ø	400 mm	CRI (Ra)	80
Power	160 W	IK Protection Class	IK09
Rated Input Voltage	100-277 V/AC		



732157

Article	Housing Color	Colour Temperature	Price
732157	Black	NW 4000 K	**€ 369.95**
732159	Black	CW 5700 K	**€ 369.95**

Accessories

930743	60° lens for Vega	**€ 49.95**
930775	Wall assembly arm for Vega DALI	**€ 39.95**
930641	Chain suspension 1 m for Alludra / Highbay Basic / Vega	**€ 14.95**
930685	Chain suspension 3 m for Alludra / Highbay Basic / Vega	**€ 24.95**

damp-proof luminaires

page 280

page 282

page 283

page 284

page 285

page 286

page 288

page 289

TRI PROOF BASIC

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Particularly energy efficient**
- **Long service life of 50,000 hours L80B50**
- **Pre-installed feed-through wiring 3x1.5 mm²/5x1.5 mm²**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust polycarbonate [PC] plastic housing**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park

Housing	Polycarbonate, Steel	Number in Row max.	15
Colour Temperature	4000 K	Power Supply Unit incl.	Yes
Width	82 mm	Light Beam Angle	120 Degree
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Length	Power	Price
730509	Light gray	NW	1400 lm	610 mm	10.0 W	**€ 49.95**
730483	Light gray	NW	2520 lm	610 mm	18.0 W	**€ 54.95**
730510	Light gray	NW	2800 lm	1210 mm	20.0 W	**€ 69.95**
730511	Light gray	NW	4200 lm	1510 mm	30.0 W	**€ 79.95**
730486	Light gray	NW	5040 lm	1210 mm	36.0 W	**€ 79.95**
730489	Light gray	NW	7700 lm	1510 mm	55.0 W	**€ 94.95**

Accessories

930713	Cable suspension for Tri Proof Basic		**€ 19.95**

TRI PROOF BASIC MOTION

- **Eligible for German BEG federal funding**
- **Particularly energy efficient**
- **Long service life of 50,000 hours (L80B50)**
- **Continuous 3x1.5 mm²/5x1.5 mm² wiring pre-installed**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust polycarbonate (PC) plastic housing**
- **Adjustable radar motion sensor**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park

Housing	Polycarbonate (PC)/ iron	Number in Row max.	15
Colour Temperature	4000 K	Power Supply Unit incl.	Yes
Width	82 mm	Light Beam Angle	120 Degree
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Motion Detector	Yes
		IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Length	Power	Price
730484	Light gray	NW	2520 lm	610 mm	18.0 W	**€ 74.95**
730487	Light gray	NW	5040 lm	1210 mm	36.0 W	**€ 99.95**
730490	Light gray	NW	7700 lm	1510 mm	55.0 W	**€ 114.95**

Accessories
930713 Cable suspension for Tri Proof Basic **€ 19.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

TRI PROOF BASIC DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [180-264 V/DC EOFI: 15 %]**
- **Particularly energy efficient**
- **Long service life of 50,000 hours L80B50**
- **Pre-installed feed-through wiring 3x 1.5 mm²/5x 1.5 mm² [DALI]**
- **Cable entry point on the back**
- **Stainless steel clips on the cover can be locked with screws**
- **Robust plastic housing**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park, Safety lighting / emergency lighting

Housing	Polycarbonate (PC)/ iron	Power Supply Unit incl.	Yes
		Light Beam Angle	120 Degree
Colour Temperature	4000 K	Control	DALI 2 / DT6, Intelli Push-Dim
Width	82 mm		
Height	75 mm	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK08
Number in Row max.	15		

Article	Housing Color		Luminous Flux	Length	Power	Price
730485	Light gray	NW	2520 lm	610 mm	18.0 W	**€ 104.95**
730488	Light gray	NW	5040 lm	1210 mm	36.0 W	**€ 129.95**
730491	Light gray	NW	7700 lm	1510 mm	55.0 W	**€ 159.95**

Accessories

930713	Cable suspension for Tri Proof Basic		**€ 19.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

TRI PROOF

- **Pre-installed feed-through wiring**
- **Including mounting clips**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park

Housing	Plastic	Rated Input Voltage	180-240 V/AC
Surface	Matt	Power Supply Unit incl.	Yes
Colour Temperature	4000 K	Light Beam Angle	120 Degree
Width	61 mm	CRI (Ra)	80
Height	56 mm	IK Protection Class	IK08



730419

Article	Housing Color		Luminous Flux	Length	Power	Number in Row max.	Price
730419	☐ White	NW	1430 lm	696 mm	17.0 W	25	**€ 53.95**
730424	☐ White	NW	2980 lm	1296 mm	35.0 W	15	**€ 82.95**
730425	☐ White	NW	3820 lm	1598 mm	44.0 W	10	**€ 88.95**



IK08 IP65

TRI PROOF MOTION

- **High impact resistance**
- **Pre-installed feed-through wiring**
- **Including mounting clips**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Industry / production / high-bay warehouse, Basement / damp room, Multi-storey car park / underground car park

Housing	Plastic	Power Supply Unit incl.	Yes
Surface	Matt	Light Beam Angle	120 Degree
Colour Temperature	4000 K	CRI (Ra)	80
Width	61 mm	Motion Detector	Yes
Height	56 mm	IK Protection Class	IK08
Rated Input Voltage	220-240 V/AC		



730450

Article	Housing Color		Luminous Flux	Length	Power	Price
730450	☐ White	NW	1900 lm	665 mm	18.5 W	**€ 62.95**
730455	☐ White	NW	2500 lm	1145 mm	24.5 W	**€ 74.95**



Accessories

930071	Cable suspension adjustable for Tri Proof lamp, 2 pieces		**€ 14.95**
930072	Surface-mounted holder for Tri Proof lamp, 2 pieces		**€ 14.95**

flexible mounting thanks to various fixing points [incl. fixing material]

five cable entries on different sides

through-wiring possible

AMP plug for easy installation

power adjustable in two stages [4,5/7,5W]

colour temperature adjustable [3000/4000K] via slide switch

NEW CCT IK08 IP54 power switch

SOTANO

- **Classic cellar light with modern LED technology**
- **Colour temperature adjustable (3,000/4,000 K) via slide switch**
- **Output adjustable in two stages (4.5/7.5 W) via slide switch**
- **Six cable entry points on multiple sides**
- **Flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room, Multi-storey car park / underground car park, Refurbishment

Housing	Polycarbonate	Power Selectable	4.5 W, 7.5 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	450/750 lm	Power Supply Unit incl.	Yes
Length	165 mm	Light Beam Angle	120 Degree
Width	120 mm	IK Protection Class	IK08
Height	65 mm		

Article	Housing Color		Price
731160	White	WW NW	**€ 16.95**
731161	Grey	WW NW	**€ 16.95**
731162	Black	WW NW	**€ 16.95**

IP54

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

NEW IK06 IP44

SOTANO RETRO ROUND

- **Classic, low-cost cellar lamp**
- **Replaceable lamp [E27]**
- **Cable entry on multiple sides**
- **Several mounting points for flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

Housing	PP - Polypropylene	Rated Input Voltage	220-240 V/AC
Height	100 mm	Control	Dimmable via optional light source
Ø	180 mm		
Max. Power	1x max. 60 W	IK Protection Class	IK06

Article	Housing Color	Price
731163	White	**€ 13.95**
731164	Grey	**€ 13.95**
731165	Black	**€ 13.95**

E27 IP44

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

NEW IK06 IP44

SOTANO RETRO OVAL

- **Classic, low-cost cellar lamp**
- **Replaceable lamp [E27]**
- **Cable entry on multiple sides**
- **Several mounting points for flexible installation**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

Housing	PP - Polypropylene	Rated Input Voltage	220-240 V/AC
Length	186 mm	Control	Dimmable via optional light source
Width	122 mm		
Height	108 mm	IK Protection Class	IK06
Max. Power	1x max. 60 W		

Article	Housing Color	Price
731166	White	**€ 10.95**
731167	Grey	**€ 10.95**
731168	Black	**€ 10.95**

E27 IP44

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

SINGLE-PHASE LIGHTS

294 single-phase lights

single-phase lights

page 296

page 298

SANOTRUNK UNIVERSAL – THE SMART SOLUTION FOR MODERN LIGHTING REFURBISHMENTS

Want to modernize old T5 and T8 trunking systems efficiently and sustainably? With SANOTRUNK UNIVERSAL, you can make almost any trunking system fit for the future.

SANOTRUNK UNIVERSAL sets new standards in terms of compatibility. Thanks to quick-fit clips and tool-free installation, the system can be integrated into almost all standard trunking systems - whether from Philips, RIDI, Trilux, Zumtobel or other manufacturers. The continuous halogen-free 5 or 7-core through-wiring, the integrated plug connectors and a selection of interchangeable lens optics [including 30°, 90°, 25° asymmetrical on one or both sides] make adaptation to any application child's play. The conversion is carried out in five simple steps:

1 - old light inserts removed [wiring remains in]

2 - hang new LED modules in old mounting rail

3 - connect modules and adjust power if necessary

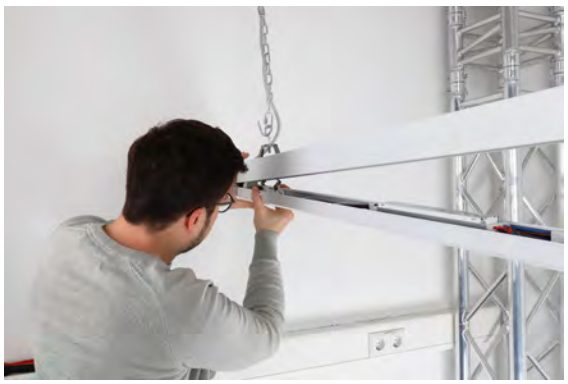

4 - click in the modules

5 - finished

COMPATIBILITY OVERVIEW

brand	trunk name	shape
AEG	Gealux-TS XX	
AEG/PHILIPS	Maxos	
Antaris	Antaris	
Antaris	trunking system	
ClickLUX Tragschiene	701501880016/ 703002880017/ 704503880018	
Fluolite	TRX / TRZ	
Fluora	Mini-Fix	
Kandem	SV70 / SV75	
Lite Licht	E-STN	
Lite Licht	Q-EMMS	
Lite Licht	Q-Rail Q-TS	
Lite Licht	Q-STN***	
Litec		
Ludwig	TR50W	
Lunux	Q-STN***	
MOLTOMX	Prestige	
Newlec	HSDT	
Norton	NSL	
OMS	Prestige	
Philips	Maxos TL5 / Maxos TL-D	
Philips	TTX150	
Philips	TTX200	
Philips	TTX400	
Philips	TTX400 T5 / TTX400 T8	
Regent	Traq	

brand	trunk name	shape
Regent	ICE**	
Regiolux	SDT	
Regiolux	SDT XX	
Regiolux	SMT / SPT	
RIDI	VLG XX	
RIDI, new trunking system	VLT***	
RIDI, new trunking system	VLT XX	
RZB	Planos	
Siemens	5LJ80XX	
Siemens	5LJ9*	
Siemens	5LS8..	
Siteco	DUS*	
Siteco	Modario	
Thron	090554 / 098287	
Trilux	07650XX	
Trilux	07690XX	
Trilux	218120 (7761/7861)	
Trilux	7910X** / 7920X**	
Trilux	7770	
VEKO	PRN	
Zumtobel	PNR	
Zumtobel	Tecton	
Zumtobel	ZX1	
Zumtobel	ZX2 T8 / ZX2 T5	

with optional mounting bracket
* 930931 | ** 930932 | *** 930933

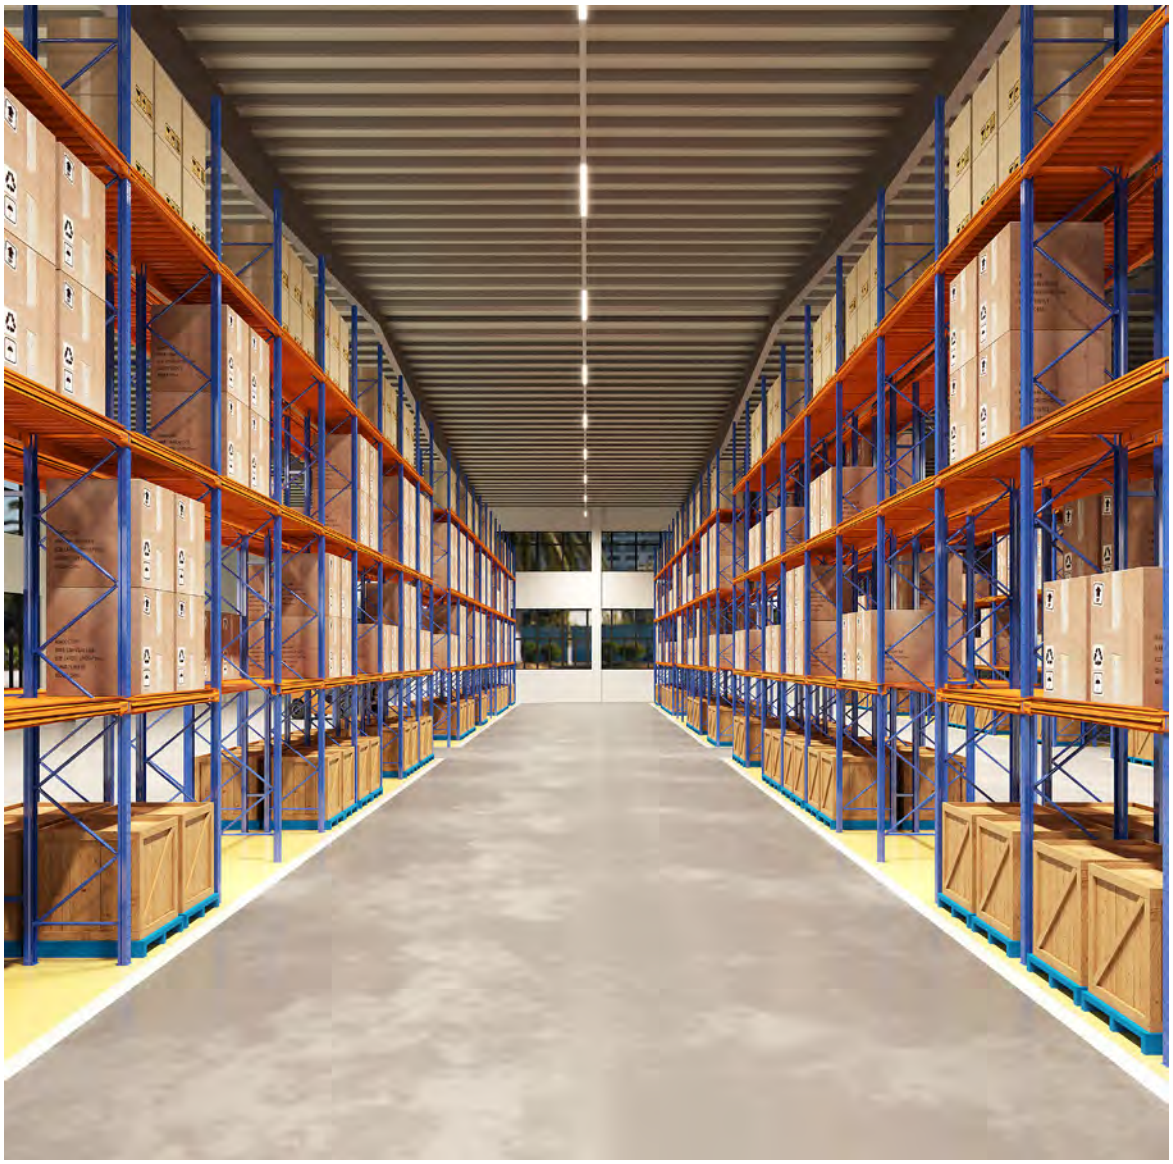

SANOTRUNK UNIVERSAL

The SANOTRUNK light strip system is a specially developed renovation solution for the fast and cost-efficient modernisation of existing T5 and T8 light strip systems. The complete continued use of the existing mounting rail systems minimises the installation costs and effort and enables tool-free installation.

Due to the compatible system architecture, SANOTRUNK can be integrated into existing mounting rails from leading manufacturers such as Philips, Trilux, Siteco, Zumtobel, Regiolux, Ridi, Fluolite and many more. The pre-assembled through-wiring with 2.5 mm^2 cable cross-section allows seamless power supply over long light strips and multiple circuits.

The lighting can be individually adjusted using integrated power switch technology or DALI control (depending on the model). Optional dummy covers and connectors enable a versatile light strip design so that modules that are not required can be left out or customised distances can be achieved.

SANOTRUNK UNIVERSAL

- **Renovation solution for T5/T8 light strip systems**
- **Continued use of existing mounting rails possible**
- **Easy, quick and reliable installation**
- **Compatible with leading manufacturers**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Can run on emergency power**
- **Can be individually adapted to the lighting circumstances**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Height	31 mm
Colour Temperature	4000 K	Rated Input Voltage	198-264 V/AC
Length	1528 mm	CRI (Ra)	80
Width	65.6 mm	IK Protection Class	IK04

Article	Housing Color		Luminous Flux	Power Selectable	Light Beam Angle	Price
707228	☐ White	NW	11600 lm	75 / 68 / 59 / 52 / 42 / 36 / 27 / 21 W	120 Degree	**€ 224.95**
707227	☐ White	NW	12200 lm	70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W	90 Degree	**€ 224.95**
707226	☐ White	NW	12400 lm	70 / 64 / 55 / 49 / 39 / 34 / 26 / 20 W	30 Degree	**€ 224.95**

IP40 EL

Accessories

930915	Sanotrunk Universal Lense, Set 5 pcs, 30 degree	**€ 29.95**
930916	Sanotrunk Universal Lense, Set 5 pcs, 60 degree	**€ 29.95**
930917	Sanotrunk Universal Lense, Set 5 pcs, 90 degree	**€ 29.95**
930918	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical	**€ 29.95**
930919	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical	**€ 29.95**
930920	Sanotrunk universal dummy cover, shortenable, PC	**€ 19.95**
930922	Sanotrunk Universal Blind Cover Aluminium	**€ 39.95**
930921	Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.	**€ 4.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 4.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 4.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 4.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 11.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 11.95**
930925	Sanotrunk Universal Power supply socket On/Off wired WAGO 267-501	**€ 14.95**
930927	Sanotrunk Universal Power supply plug On/Off wired WAGO 267-510	**€ 17.95**
930929	Connector, Sanotrunk Universal	**€ 44.95**

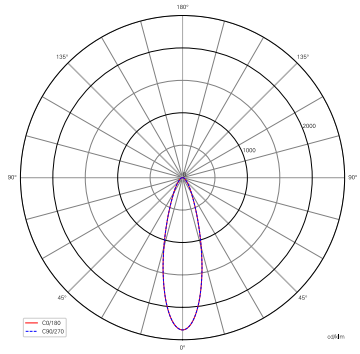

30°

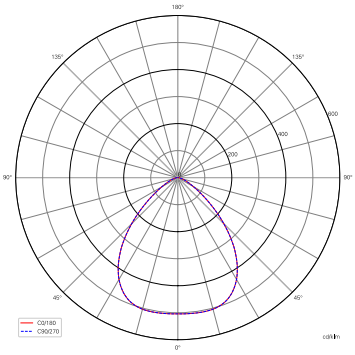

90°

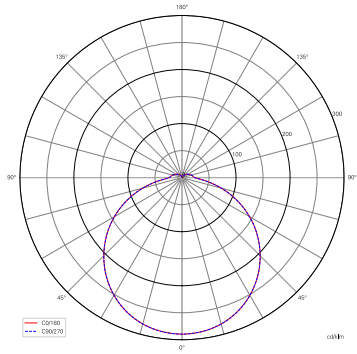

120°

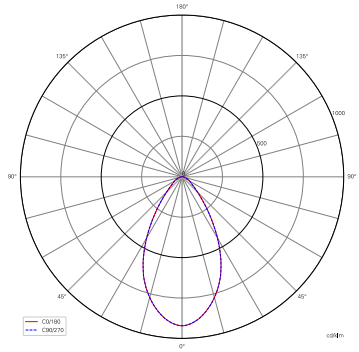

60°

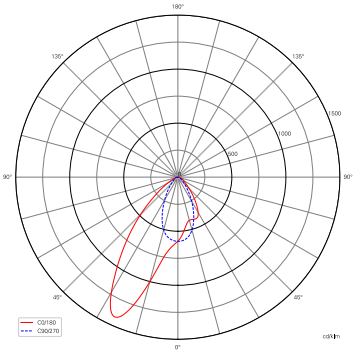

25°, asymmetrical on one side

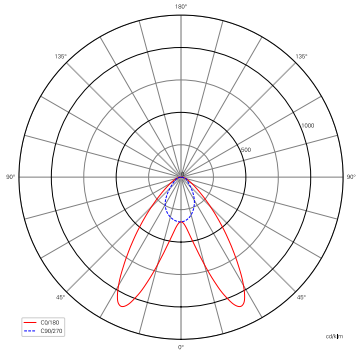

25°, double-sided asymmetrical

SANOTRUNK UNIVERSAL DALI

- **Renovation solution for T5/T8 light strip systems**
- **Continued use of existing mounting rails possible**
- **Easy, quick and reliable installation**
- **Compatible with leading manufacturers**
- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Can run on emergency power**
- **DALI versions with Intelli-Data: Dali parts 251, 252, 253 for lighting, energy and maintenance data**
- **Can be individually adapted to the lighting circumstances**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Industry / production / high-bay warehouse, Refurbishment, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Colour Temperature	4000 K	Control	DALI 2 / DT6, Push-Dim
Length	1528 mm	CRI (Ra)	80
Width	65.6 mm	IK Protection Class	IK04
Height	31 mm		

Article	Housing Color		Luminous Flux	Power	Light Beam Angle	Price
707231	White	NW	11600 lm	75.0 W	120 Degree	**€ 274.95**
707230	White	NW	12200 lm	70.0 W	90 Degree	**€ 274.95**
707229	White	NW	12400 lm	70.0 W	30 Degree	**€ 274.95**

IP40 EL

Accessories

930915	Sanotrunk Universal Lense, Set 5 pcs, 30 degree	**€ 29.95**
930916	Sanotrunk Universal Lense, Set 5 pcs, 60 degree	**€ 29.95**
930917	Sanotrunk Universal Lense, Set 5 pcs, 90 degree	**€ 29.95**
930918	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, single side asymmetrical	**€ 29.95**
930919	Sanotrunk Universal Lense, Set 5 pcs, 25 degree, double side asymmetrical	**€ 29.95**
930920	Sanotrunk universal dummy cover, shortenable, PC	**€ 19.95**
930922	Sanotrunk Universal Blind Cover Aluminium	**€ 39.95**
930921	Sanotrunk universal mounting clips for blind cover, can be shortened 2 pcs.	**€ 4.95**
930931	Sanotrunk universal mounting clips Siteco DUS / Simens 5LJ9 2 pcs.	**€ 4.95**
930932	Sanotrunk universal mounting clamps Regent ICE 2 pcs.	**€ 4.95**
930933	Sanotrunk universal mounting clips RIDI VLT(old) / Lite-Light Q-STN / Lunux Q-STN 2 pcs.	**€ 4.95**
930923	Sanotrunk Universal Power feed socket WAGO 267-501	**€ 11.95**
930924	Sanotrunk Universal Power supply plug WAGO 267-510	**€ 11.95**
930926	Sanotrunk Universal Power supply socket DALI wired WAGO 267-501	**€ 14.95**
930928	Sanotrunk Universal Power supply plug DALI wired WAGO 267-510	**€ 17.95**
930930	Connector, Sanotrunk Universal	**€ 49.95**

POWER RAILS

304 D ONE 1-phase power rail system

322 1-phase power rail luminaires

338 D LINE 3-phase power rail system

370 D LINE DALI 3-phase power rail system

398 power rail luminaires

D ONE system

page 308

page 310

page 310

page 311

page 312

page 312

page 313

page 313

page 314

page 314

page 315

page 316

page 316

page 316

page 317

page 318

page 318

D ONE MOUNTING POWER RAIL SYSTEM 1-PHASE 230V

mounting modules	illust.	white	black	page
mounting power rail L: 1000 mm	01	**720000**	**720003**	309
mounting power rail L: 2000 mm	01	**720001**	**720004**	309
mounting power rail L: 3000 mm	01	**720002**	**720005**	309
feeder left	02	**720006**	**720007**	310
feeder right	03	**720008**	**720009**	310
flex feeder with ceiling canopy	04	**720010**	**720011**	311
electrical straight connector with center feed option	05	**720012**	**720013**	312
electrical connector	06	**720014**	**720015**	312
90°-joint left	07	**720016**	**720017**	313
90°-joint right	08	**720018**	**720019**	313
T-joint left-right-right	09	**720020**	**720021**	315
T-joint right-right-left	10	**720022**	**720023**	314
T-joint left-left-right	11	**720024**	**720025**	315
T-joint right-left-left	12	**720026**	**720027**	314
X-joint left-left-right-right	13	**720028**	**720029**	316
endcap	14	**720030**	**720031**	316
cover panel	15	**720038**	**720039**	316
ceiling mounting bracket flex	16	**720032**	**720033**	318
wire suspension bracket 3000 mm	17	**720034**	**720035**	318
1-phase adapter for light installation	18	**720036**	**720037**	317

ILLUSTRATIONS WITH PLANNING-RELEVANT DIMENSIONS

01


02

03

04


05


06

07


08


09


10


11


12


13


14

15

16


17


18


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	870 mm		
3000 mm	125 mm		790 mm	1160 mm

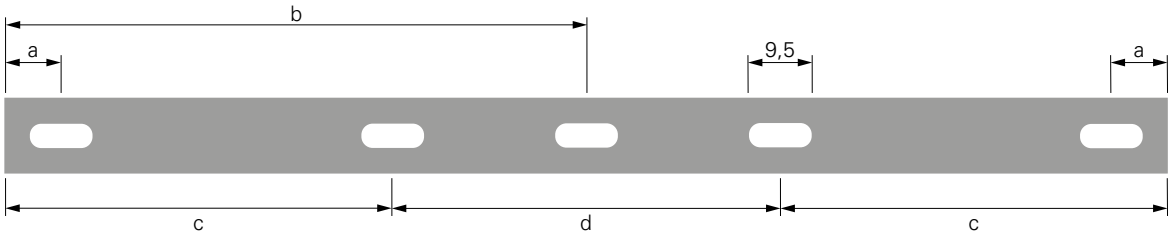

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

10 N ≙ 1,02 kg
dimension in mm

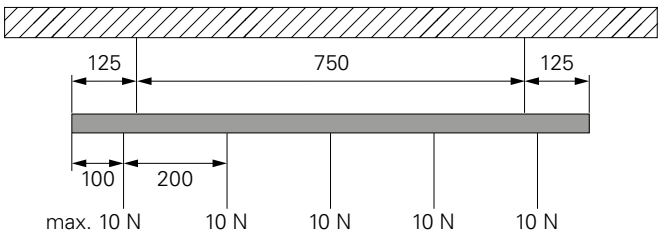

MECHANICAL LOAD TRACK POWER RAIL 2000MM

10 N ≙ 1,02 kg
dimension in mm

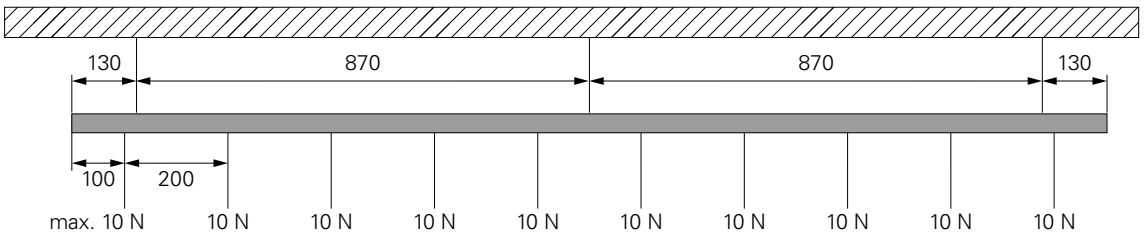

MECHANICAL LOAD TRACK POWER RAIL 3000MM

10 N ≙ 1,02 kg
dimension in mm

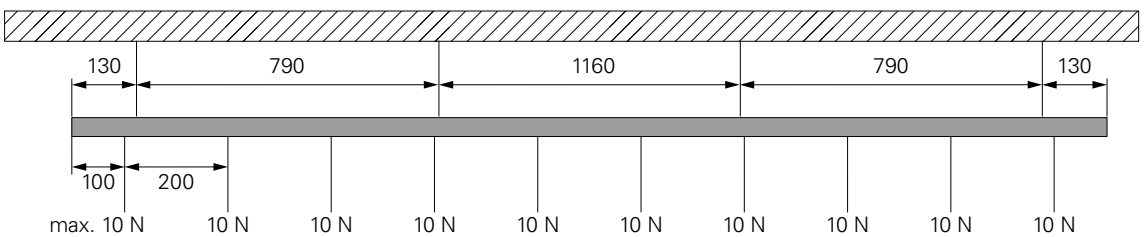

PLANNING GUIDE D ONE TRACK SYSTEM 1-PHASE 230V



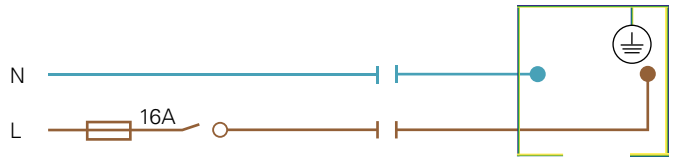

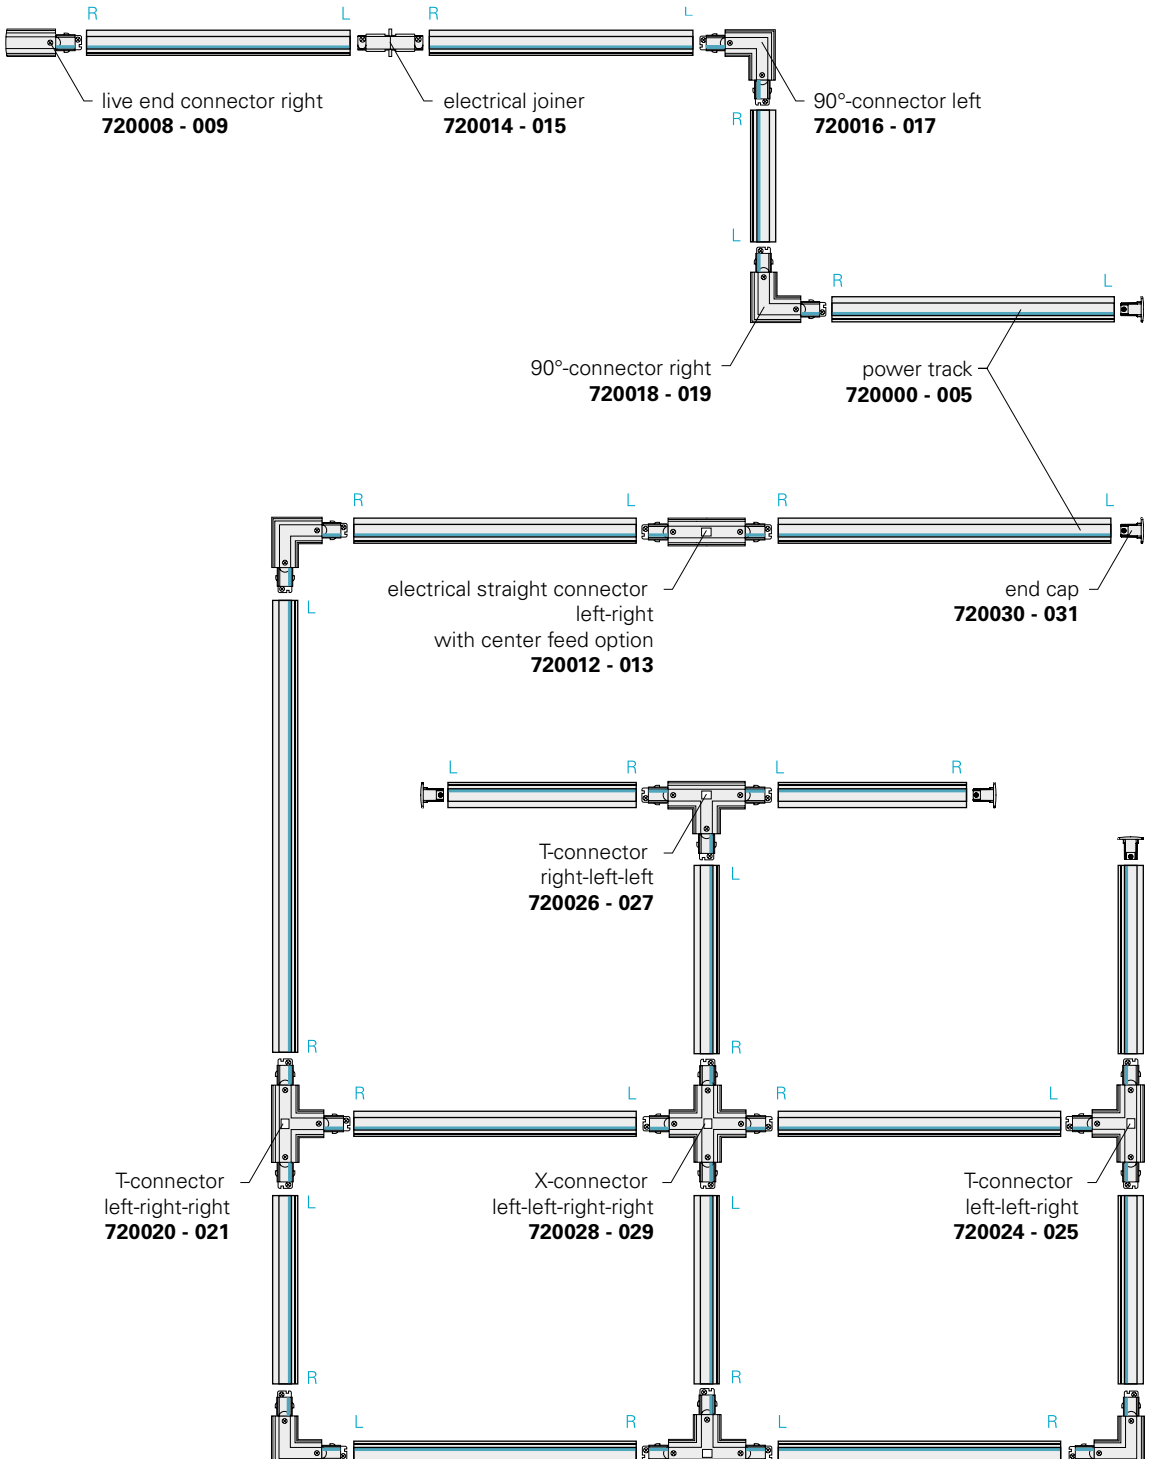

D ONE SURFACE-MOUNTED POWER TRACK

D ONE is the single-phase, 230 V busbar system from DEKO-LIGHT. This extremely compact and sophisticated system combines the benefits of 48 V low-voltage busbars [slim design] with the practical advantages of fully fledged 230 V systems [no transformer required for operation]. Their small size allows all D ONE components to integrate seamlessly into an extremely wide variety of environments, adding a timeless, understated, premium look to private dwellings and commercial facilities like shops and bars. All D ONE components are available in the universally suitable colours black and white, allowing a wide variety of installation options for flexible and universal use. The flexible infeed with ceiling canopy even allows D ONE busbars to be installed in places where there is no power supply available in the immediate vicinity.

D ONE SURFACE-MOUNTED POWER TRACK

- **elegant and compact mini design**
- **easy to install**
- **many different designs available**
- **Mini design with one current phase**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Width	26.2 mm	Output Current	16 A
Height	22.2 mm		

Article	Housing Color	Length	Price
720000	White	1000 mm	**€ 39.95**
720003	Black	1000 mm	**€ 39.95**
720001	White	2000 mm	**€ 69.95**
720004	Black	2000 mm	**€ 69.95**
720002	White	3000 mm	**€ 99.95**
720005	Black	3000 mm	**€ 99.95**

IP20

Accessories for **720000**, **720001**, **720002**
720038 D One cover panel for integrated busbar, white **€ 5.95**

Accessories for **720003**, **720004**, **720005**
720039 D One cover panel for integrated busbar, black **€ 5.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

D ONE ELECTRIC FEEDER LEFT

- **Power can be fed in from above (ceiling) or from the side**
- **Elegant and compact mini design**
- **Simple installation**
- **Enables flexible installation options**

Housing	Plastic	Height	22.2 mm
Length	71 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720006	White	**€ 13.95**
720007	Black	**€ 13.95**

IP20

D ONE ELECTRIC FEEDER RIGHT

- **Power can be fed in from above (ceiling) or from the side**
- **elegant and compact mini design**
- **easy to install**
- **enables flexible installation options**

Housing	Plastic	Height	22.2 mm
Length	71 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720008	White	**€ 13.95**
720009	Black	**€ 13.95**

IP20

D ONE FLEX FEEDER WITH CEILING CANOPY

- **Elegant and compact mini design**
- **Easy to install**
- **Power supply via ceiling baldachin/current track adapter (200-1,000 mm)**
- **Enables various installation options**

Housing	Plastic, Metal	Rated Input Voltage	220-240 V/AC
Length	1000 mm	Output Current	6 A
Width	120 mm	Connected Load max.	1320 W
Height	28 mm		

Article	Housing Color	Price
720010	White	**€ 39.95**
720011	Black	**€ 39.95**

IP20

D ONE ELECTRICAL STRAIGHT CONNECTOR WITH FEED OPTION

- **Elegant and compact mini design**
- **Easy to install**
- **Power supply from above (from ceiling)**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720012	White	**€ 24.95**
720013	Black	**€ 24.95**

IP20

D ONE MINI-STRAIGHT CONNECTOR

- **elegant and compact mini design**
- **easy to install**

Housing	Plastic	Height	22 mm
Length	62 mm	Rated Input Voltage	220-240 V/AC
Width	26 mm	Output Current	16 A

Article	Housing Color	Price
720014	White	**€ 8.95**
720015	Black	**€ 8.95**

IP20



D ONE 90°-CONNECTOR LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Housing	Plastic	Height	22.2 mm
Length	73 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720016	White	**€ 24.95**
720017	Black	**€ 24.95**

IP20



D ONE 90°-CONNECTOR RIGHT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Housing	Plastic	Height	22.2 mm
Length	73 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720018	White	**€ 24.95**
720019	Black	**€ 24.95**

IP20



D ONE T-CONNECTOR RIGHT-LEFT-LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720026	White	**€ 34.95**
720027	Black	**€ 34.95**

IP20



D ONE T-CONNECTOR RIGHT-RIGHT-LEFT

- **Optional power supply from above (from ceiling)**
- **Elegant and compact mini design**
- **Easy to install**
- **Many different design shapes possible**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720022	White	**€ 34.95**
720023	Black	**€ 34.95**

IP20



D ONE T-CONNECTOR LEFT-RIGHT-RIGHT

- **Power can be fed in from above [via ceiling]**
- **Elegant and compact mini design**
- **Easy to install**
- **Enables many different design shapes**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720020	White	**€ 34.95**
720021	Black	**€ 34.95**

IP20



D ONE T-CONNECTOR LEFT-LEFT-RIGHT

- **Power can be fed in from above [via ceiling]**
- **Elegant and compact mini design**
- **Easy to install**
- **Enables many different design shapes**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	73 mm	Output Current	16 A

Article	Housing Color	Price
720024	White	**€ 34.95**
720025	Black	**€ 34.95**

IP20

D ONE X-CONNECTOR



- **Power can be fed in from above [via ceiling]**
- **Easy to install**

Housing	Plastic	Height	22.2 mm
Length	121 mm	Rated Input Voltage	220-240 V/AC
Width	121 mm	Output Current	16 A

Article	Housing Color	Price
720028	White	**€ 49.95**
720029	Black	**€ 49.95**

IP20

NEW

D ONE COVER PANEL

- **suitable for D-One surface-mounted system**
- **for covering live busbars < 2.30 m high (contact zone)**

Housing	Plastic	Width	16.5 mm
Length	1000 mm	Height	6.8 mm

Article	Housing Color	Price
720038	White	**€ 5.95**
720039	Black	**€ 5.95**

D ONE END CAP

- **Current touch protection**
- **For closing open current track ends**

Housing	Plastic	Width	26 mm
Length	15 mm	Height	22.2 mm

Article	Housing Color	Price
720030	White	**€ 3.95**
720031	Black	**€ 3.95**

D ONE 1-PHASE ADAPTER FOR LIGHT INSTALLATION

- **Elegant and compact mini design**
- **Easy to install**
- **230 V adapter for converting lights**
- **Delivery incl. mounting material (reduction bush, flat M10 nut, strain relief)**

Housing	Plastic, Metal	Rated Input Voltage	220-240 V/AC
Length	70 mm	Output Current	6 A
Width	26 mm	Loading Weight max.	1 kg
Height	30 mm	Load Force max.	100 N

Article	Housing Color	Price
720036	White	**€ 16.95**
720037	Black	**€ 16.95**

IP20

D ONE MOUNTING BRACKET FLEX

- **Simplifies the installation of more complex track shapes**
- **Enables numerous design forms**
- **Expands options for installation**

Housing	Metal	Width	28 mm
Length	30 mm	Height	10.5 mm

Article	Housing Color	Price
720032	White	**€ 5.95**
720033	Black	**€ 5.95**

D ONE ROPE SUSPENSION BRACKET

- **Stylish and sophisticated suspended mounting**
- **Enables numerous design forms**
- **Expands options for installation**
- **Can be cut to length for hanger lengths: 70-3,020 mm**

Housing	Metal	Width	28 mm
Length	120 mm	Height	3020 mm

Article	Housing Color	Price
720034	White	**€ 19.95**
720035	Black	**€ 19.95**

1-phase power rail luminaires

page 322

page 325

page 326

page 328

page 329

page 330

page 332

page 333

page 334

page 335

CAN

- **customised lighting solution thanks to replaceable light source**
- **can be combined with the product family of the CAN series**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium, Polycarbonate	Rated Input Voltage	220-240 V/AC
Length	134 mm	Control	Dimmable via optional light source
Ø	60 mm	Rotation Angle	350 Degree
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Price
707155	White	**€ 41.95**
707156	Black	**€ 41.95**



Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

page 46 page 88 page 92 page 202 page 222 page 414 page 507

NEW

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Pendulum Length	1500 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Height	Price
707253	White	150 mm	**€ 77.95**
707254	Black	150 mm	**€ 77.95**
707257	White	350 mm	**€ 91.95**
707258	Black	350 mm	**€ 91.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

CAN BASE MIX'N MATCH 1/3

- **customised lighting solution thanks to interchangeable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Housing	Aluminium	Control	Dimmable via optional light source
Height	74 mm	Rotation Angle	350 Degree
Ø	70 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
707249	White	**€ 35.99**
707250	Black	**€ 35.99**

GU10 | IP20

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

2/3 NEW

CYLINDER HOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 7.95**
931054	Black	**€ 7.95**
931055	Bronze	**€ 18.95**
931056	Brass	**€ 18.95**
931057	Black gray	**€ 18.95**
931058	Rosé	**€ 18.95**

IP20

3/3

REFLECTOR RING CAN SERIES MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 4.95**
930302	Black	**€ 4.95**
930303	Gold	**€ 4.95**
930366	Silver	**€ 4.95**

IP20

Ra>90 SDCM<3

NIHAL MINI

- **can be rotated and swivelled**
- **can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium, Polycarbonate	Rated Input Voltage	220-240 V/AC
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Luminous Flux	720 lm	Light Beam Angle	36 Degree
Length	94 mm	Rotation Angle	350 Degree
Width	102 mm	Swivelling Angle	350 Degree
Height	126 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	60 mm	CRI (Ra)	90
Power	10.9 W		

Article	Housing Color		Price
707185	White	WW	**€ 151.95**
707186	Black	WW	**€ 151.95**

CC IP20

Accessories

930297	Side cover white for Nihal Mini series	**€ 3.95**
930298	Side cover black for Nihal Mini series	**€ 3.95**
930364	Side cover silver for Nihal Mini series	**€ 3.95**
930299	Side cover gold for Nihal Mini series	**€ 3.95**
930300	Side cover walnut wood look for Nihal Mini series	**€ 5.95**
930768	Side cover natural oak wood look for Nihal Mini series	**€ 5.95**
930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930765	24° reflector for Nihal Mini series	**€ 10.95**
930305	36° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 3.60**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930767	12° lens for Nihal Mini series	**€ 10.95**

Ra>90 SDCM<3

UNI 2 MINI

- **„Glow" effect on the reflector ring**
- **Rotatable and swivelling**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium, Steel, Polycarbonate	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Height	128 mm	Rotation Angle	350 Degree
Ø	75 mm	Swivelling Angle	90 Degree
Power	11.3 W	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90

Article	Housing Color		Luminous Flux	Price
707188	Black	ww	700 lm	**€ 135.96**
707187	White	ww	730 lm	**€ 135.96**



Accessories

930327	Rear black cover for Uni II Mini series	**€ 3.45**
930328	White heat sink cover for Uni II Mini series	**€ 3.55**
930329	Black heat sink cover for Uni II Mini series	**€ 2.95**
930330	Reflector ring white for Uni II Mini series	**€ 10.95**
930331	Reflector ring black for Uni II Mini series	**€ 10.95**
930332	Reflector ring gold for Uni II Mini series	**€ 10.95**
930333	Reflector ring chrome for Uni II Mini series	**€ 10.95**
930770	Reflector 24° for Uni II Mini series	**€ 10.95**
930771	Reflector 48° for Uni II Mini series	**€ 10.95**

page 77 page 150

SLIM

- **glare-free thanks to low UGR value (<19)**
- **slim design with just 39 mm diameter**
- **incl. silver-coloured reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	330 Degree
Length	197 mm	Swivelling Angle	60 Degree
Ø	39 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	5 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90


707201

Article	Housing Color		Price
707201	White	WW	**€ 83.95**
707202	Black	WW	**€ 83.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 4.95**
930745	Reflector ring black for Slim series	**€ 4.95**
930746	Reflector ring gold-coloured for Slim series	**€ 5.95**
930748	36° lens for Slim series	**€ 4.95**
930749	60° lens for Slim series	**€ 4.95**

page 39

page 40

page 331

page 440

Ra>90 UGR<19

SLIM

- **Extra-soft fabric cable**
- **Glare-free, due to low UGR value [<19]**
- **Slim design at just 39 mm in diameter**
- **Max. suspended mounting: 1,800 mm**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power	5 W
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	500 lm	Power Supply Unit incl.	Yes
Length	1800 mm	Light Beam Angle	24 Degree
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	39 mm		
Pendulum Length	1800 mm	CRI (Ra)	90



707163

Article	Housing Color		Price
707163	Black	WW	**€ 93.95**
707164	White	WW	**€ 93.95**

IP20

Accessories

930744	Reflector ring white for Slim series	**€ 4.95**
930745	Reflector ring black for Slim series	**€ 4.95**
930746	Reflector ring gold-coloured for Slim series	**€ 5.95**
930748	36° lens for Slim series	**€ 4.95**
930749	60° lens for Slim series	**€ 4.95**



page 39

page 40

page 440

Ra>90 SDCM<5

LUCEA

- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rotation Angle	350 Degree
Colour Temperature	2700 K	Swivelling Angle	90 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Rated Input Voltage	200-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03
Light Beam Angle	36 Degree		



707165

Article	Housing Color		Luminous Flux	Power	Price
707165	White	ww	800 lm	6.0 W	**€ 88.95**
707166	Black	ww	800 lm	6.0 W	**€ 88.95**
707167	White	ww	1300 lm	10.0 W	**€ 94.95**
707168	Black	ww	1300 lm	10.0 W	**€ 94.95**

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 44

page 84

page 85

page 333

Ra>90 SDCM<5

LUCEA

- **Particularly soft textile cable**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm	CRI (Ra)	90
Pendulum Length	1600 mm	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		

Article	Housing Color		Luminous Flux	Power	Price
707175	White	ww	800 lm	6.0 W	**€ 119.95**
707176	Black	ww	800 lm	6.0 W	**€ 119.95**
707177	White	ww	1300 lm	10.0 W	**€ 124.95**
707178	Black	ww	1300 lm	10.0 W	**€ 124.95**

IP20

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 44

page 84

page 85

page 332

LUCEA DTW

- **Dim-to-warm 1,800K - 2,700K**
- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	1800-2700 K	Rotation Angle	350 Degree
Luminous Flux	750 lm	Swivelling Angle	90 Degree
Height	249 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm	CRI (Ra)	90
Power	10 W	IK Protection Class	IK03
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes		



707211

Article	Housing Color		Price
707211	White	WW	**€ 104.95**
707212	Black	WW	**€ 104.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 42

page 80

page 82

LUCEA DTW

- **high colour rendering**
- **Dim-to-warm 1,800K-2,700K**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	1800-2700 K	Power Supply Unit incl.	Yes
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm	CRI (Ra)	90
Pendulum Length	1800 mm	IK Protection Class	IK03
Power	10 W		

Article	Housing Color		Price
707215	White	WW	**€ 135.96**
707216	Black	WW	**€ 135.96**

IP20

Accessories

930752	Door panel for Lucea 6/10 white		**€ 22.95**
930753	Door panel for Lucea 6/10 black		**€ 22.95**
930756	Reflector ring for Lucea 6/10 white		**€ 4.95**
930757	Reflector ring for Lucea 6/10 black		**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold		**€ 4.95**

page 42

page 80

page 82

page 432

page 436

D LINE system

page 346

page 348

page 348

page 349

page 350

page 350

page 351

page 351

page 352

page 352

page 353

page 354

page 354

page 355

page 356

page 356

page 357

page 357

page 358

page 359

page 359

page 360

page 360

page 361

page 361

page 363

page 364

page 365

page 366

page 366

page 367

D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

mounting modules	illust.	white	grey	black	page
mounting power rail L: 1000 mm	01	**710000**	**710001**	**710002**	347
mounting power rail L: 2000 mm	01	**710003**	**710004**	**710005**	347
mounting power rail L: 3000 mm	01	**710006**	**710007**	**710008**	347
mounting adapter for lights	02	**710045**	**710046**	**710047**	349
live end feeder left	03	**710009**	**710010**	**710011**	350
live end feeder right side	04	**710012**	**710013**	**710014**	350
electrical straight connector with center feed option	05	**710042**	**710043**	**710044**	351
flexible-connector left-right side	06	**710039**	**710040**	**710041**	351
electrical joint	07	**710015**	**710016**	**710017**	352
mechanical joint	08	**710018**	**710019**	**710020**	352
90°-joint left-right with exchange mechanism	09	**710036**	**710037**	**710038**	353
T-joint left-left-right with exchange mechanism	10	**710027**	**710028**	**710029**	354
T-joint right-right-left with exchange mechanism	11	**710030**	**710031**	**710032**	354
X-joint left-left-right-right	12	**710033**	**710034**	**710035**	355
cover plate built in track	13	**710077**	**-**	**710079**	356
endcap	14	**710066**	**710067**	**710068**	356
ceiling mounting bracket flex	15	**710063**	**710064**	**710065**	357
suspension clamp for track connection	16	**710057**	**710058**	**710059**	359
ceiling suspension rigid [635 mm] with canopy	17	**710078**	**710085**	**710084**	359
extension for ceiling suspension [300 mm]	17	**710086**	**710088**	**710087**	359
wire suspension bracket with ceiling rosette 1500 mm	18	**710048**	**710049**	**710050**	360
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	**710094**	**710095**	**710096**	360
quick mounting bracket for grid ceilings	20	**710051**	**710052**	**710053**	363
wall bracket	21	**710104**	**710105**	**710106**	357
truss adapter | silver coloured	22	**-**	**710083**	**-**	361
quick mounting clamp for exhibition stand construction	23	**-**	**-**	**710082**	361
3-circuits adapter for light installation	24	**710097**	**710098**	**710099**	364
3-circuits adapter with Multi CC power supply 250/350/450/500 mA | 6,30 - 21,00 W | 25-42V	25	**862180**	**-**	**862183**	365
3-circuits adapter with Multi CC power supply 600/700/750/800 mA | 15,00 - 33,60 W | 25-42V	25	**862181**	**-**	**862184**	365
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA | 23,00 - 44,10 W | 27-42V	25	**862182**	**-**	**862185**	363
electrical outlet adapter	26	**710024**	**710025**	**710026**	366
mounting adapter for additional components max. 10kg	27	**710054**	**710055**	**710056**	366
signs hook, max. load 5kg	28	**710060**	**710061**	**710062**	367

ILLUSTRATIONS WITH PLANNING-WRELEVANT DIMENSIONS

01


02


03

04

05


06


07

08

09


10


11


12


13

14


15

16


17


18


19


20


21


22


23

24


25


26


27

28

D LINE BUILT IN POWER RAL SYSTEM 3-PHASE 220-440V

built in modules	illust.	white	illust.	cover	page
built in power rail L:1000 mm	01	**710069**		-	348
built in power rail L: 2000 mm	01	**710070**		-	348
built in power rail L: 3000 mm	01	**710071**		-	348
eletric feeder left side	02	**710009**	19	**710089**	350
electric feeder right side	03	**710012**	19	**710089**	350
electrical straight connector with center feed option	04	**710042**	20	**710090**	351
electrical joint	05	**710015**		-	352
mechanical joint	06	**710018**		-	352
90°-joint left-right	07	**710036**	21	**710091**	353
T-joint left-left-right	08	**710027**	22	**710093**	354
T-joint right-right-left	09	**710030**	22	**710093**	354
X-joint left-left-right-right	10	**710033**	23	**710092**	355
cover plate built in track	11	**710077**			356
endcap	12	**710103**		-	356
quick-mounting bracket for installation rail	13	**710107**			348
3-circuits adapter for light installation	14	**710097**		-	364
3-circuits adapter with Multi CC power supply 250/350/450/500 mA | 6,30 - 21,00 W | 25-42V	15	**862180**			365
3-circuits adapter with Multi CC power supply 600/700/750/800 mA | 15,00 - 33,60 W | 25-42V	15	**862181**			365
3-circuits adapter with Multi CC power supply 850/900/950/1050 mA | 23,00 - 44,10 W | 27-42V	15	**862182**			365
electrical outlet adapter	16	**710024**		-	366
mounting adapter for additional components max. 10kg	17	**710054**		-	366
signs hook, max. load 5kg	18	**710060**		-	367

710033

710092

Unlike other systems, you will not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks in the future. All standard components of the system are used and only the matching plastic cover is exchanged, and the recessed version is ready. This simplifies stock-keeping and gives significantly more flexibility here as well.

ILLUSTRATIONS WITH PLANNINGRELEVANT DIMENSIONS

01


02

03

04


05

06

07


08


09


10


11

12


13


14


15


16


17


18

19

20


21


22


23


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	998 mm		
3000 mm	125 mm		914 mm	1167 mm

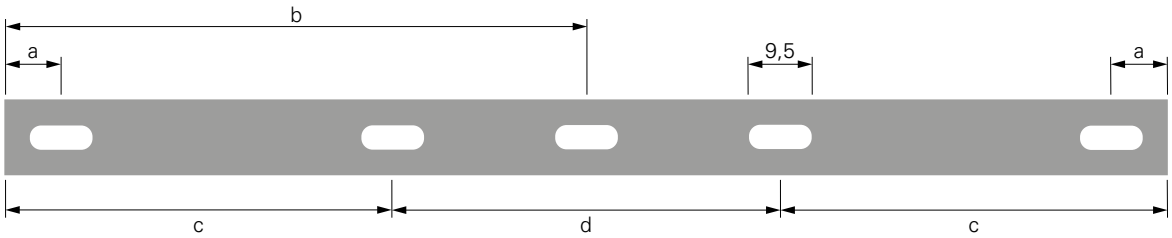

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

50 N ≙ 5,09 kg
dimension in mm

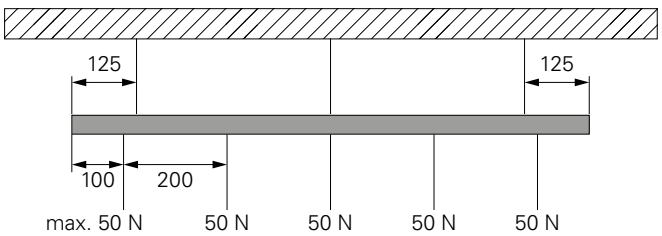

MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

50 N ≙ 5,09 kg
dimension in mm

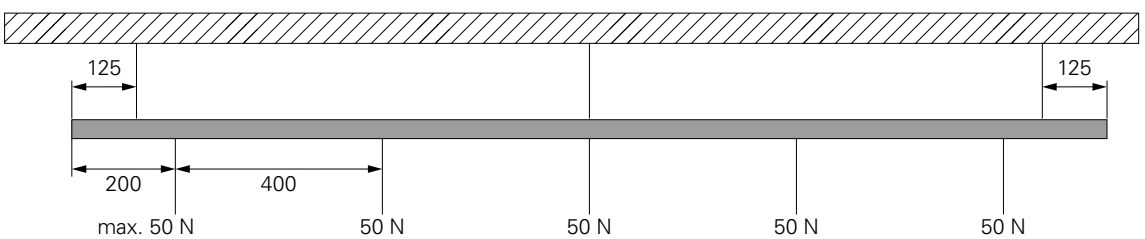

PLANNING GUIDE D LINE MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V



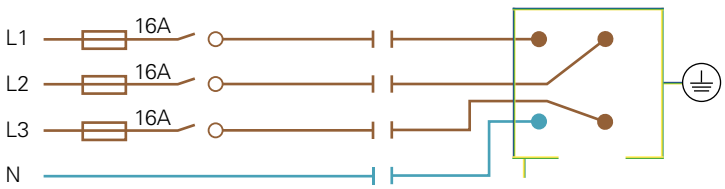

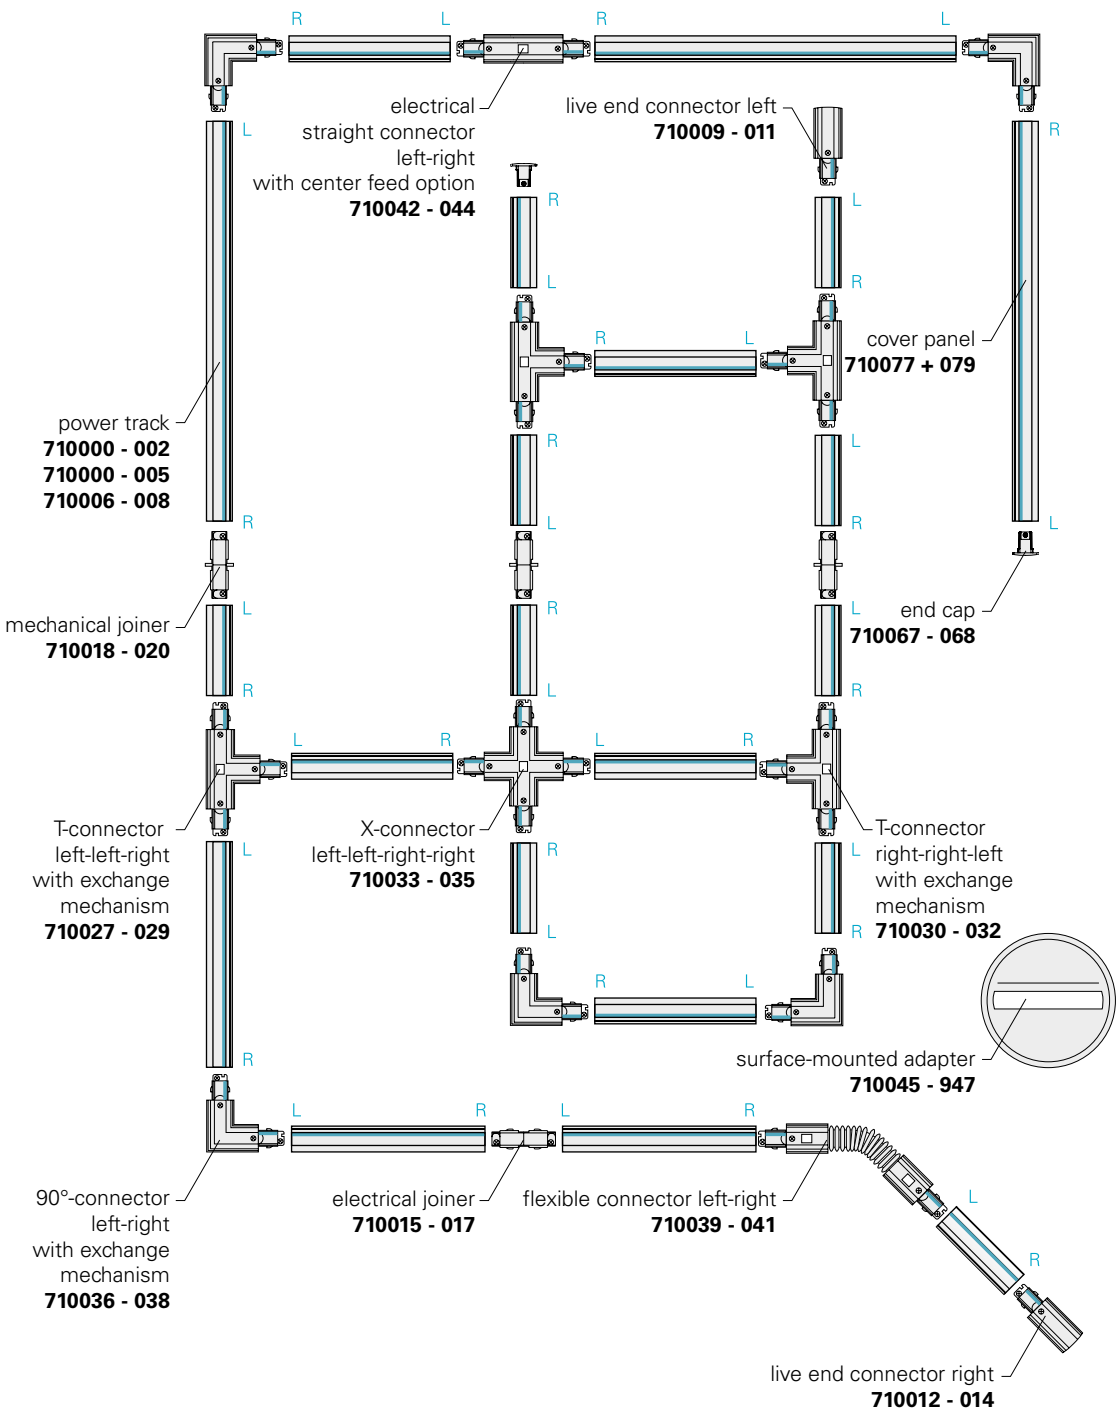

D LINE POWER RAIL SYSTEM 3-PHASE 220-440V

The D LINE track system is available exclusively from DEKO-LIGHT and is extremely easy to plan and install thanks to its components, some of which have been completely redesigned. It is also compatible with all common track adapters and luminaires. The elegant and timeless design is available in white, black and grey, and the wide range of accessories and mounting components means that there are no limits to its use and installation. Thanks to the interchangeable mechanism of the 90° and T connectors, planning is easier than ever before and the installation of even complex shapes will be child's play in the future.

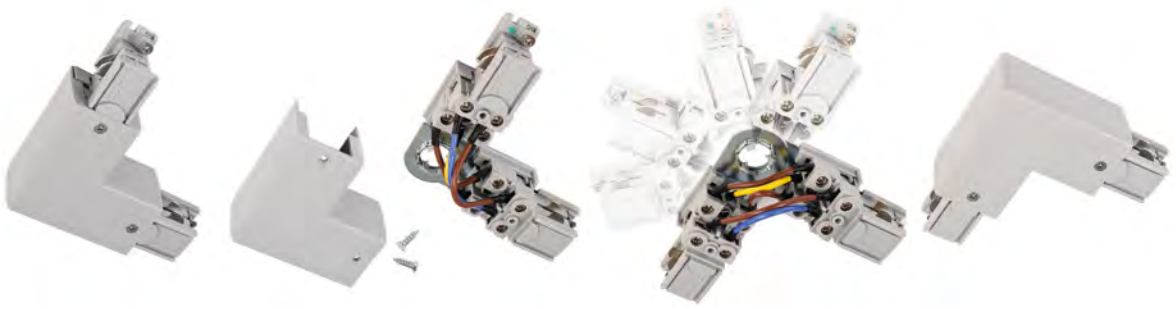

COMPATIBILITY OVERVIEW



D LINE 3-phase track is compatible with the following track lights / adapters:

manufacturer	system name
DEKO-LIGHT	all 3-phase spotlights
Molto Luce	3-Phase-Track*
Global / Nordic	Trac Pro 3*
Ivela	LKM Square / Quadro*
Erco	3-Phasen*
Hoffmeister	3-Phasen*
Zumtobel / Staff	3-Phasen*
Eutrac	One Track*
SLV	S-Track

*compatible with all DEKO-LIGHT 3-phase spotlights, except ALNITAK series [S. 403] and 3-phase adapter with integrated multi-CC power supply [S. 365].

All data without guarantee. Technical data and dimensions are subject to change without prior notice. Check against samples when planning a project to ensure functionality.

On request, all D LINE busbars can be supplied ready-made and cut to size according to your specifications for a small surcharge. This allows you to start installation directly on site at the customer's premises. Please contact our sales department for more information.

D LINE SURFACE-MOUNTED POWER TRACK

The D LINE busbar system is available exclusively from DEKO-LIGHT and is now extremely easy to plan and install thanks to a complete redesign of several components. It is also compatible with all common busbar adapters and lights. The elegant and timeless design is available in white, black and grey, and with a huge range of accessories and assembly components available, the possibilities are almost endless when it comes to application and installation. The reversal mechanism of the 90° and T-connectors makes planning easier than ever before, and in the future installing even complex shapes will be a breeze.

D LINE SURFACE-MOUNTED POWER TRACK

- **Up to three phases (3x 16 A) can be fed in**
- **Numerous attachment options**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Length	Price
710000	White	1000 mm	**€ 44.95**
710001	Light gray	1000 mm	**€ 44.95**
710002	Black	1000 mm	**€ 44.95**
710003	White	2000 mm	**€ 89.95**
710004	Light gray	2000 mm	**€ 89.95**
710005	Black	2000 mm	**€ 89.95**
710006	White	3000 mm	**€ 129.95**
710007	Light gray	3000 mm	**€ 129.95**
710008	Black	3000 mm	**€ 129.95**

IP20

Accessories for **710000**, **710003**, **710006**
710077 D Line/Dali cover panel for integrated busbar, white **€ 5.95**

Accessories for **710001**, **710002**, **710004**, **710005**, **710007**, **710008**
710079 D Line/Dali cover panel for integrated busbar, black **€ 5.95**

D LINE BUILT-IN POWER TRACK

- **Up to three phases (3x 16 A) can be fed in**
- **Suitable for recessed system**
- **Side wings for optimal ceiling installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Width	56 mm	Output Current	16 A

Article	Housing Color	Length	Price
710069	White	1000 mm	**€ 54.95**
710070	White	2000 mm	**€ 99.95**
710071	White	3000 mm	**€ 144.95**

IP20

Accessories
710077 D Line/Dali cover panel for integrated busbar, white **€ 5.95**

NEW

D LINE QUICK-MOUNTING BRACKET FOR INSTALLATION RAIL

- **Suitable for recessed system**
- **Simplifies installation of recessed current tracks**
- **No additional substructure is required for mounting**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	45 mm
Mounting Type	Installation mounting	Height	25 mm
Length	70 mm		

Article	Housing Color	Price
710107	Silver	**€ 4.95**

IP20

D LINE SURFACE-MOUNTED ADAPTER

- **Surface-mounted housing for converting busbar spotlights**
- **Single phase (1x 16 A) feed**
- **Easy to install**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Ø	110 mm
Mounting Type	Top mounting	Rated Input Voltage	220-240 V/AC
Height	35 mm	Output Current	16 A

Article	Housing Color	Price
710045	White	**€ 29.95**
710046	Light gray	**€ 29.95**
710047	Black	**€ 29.95**

IP20



D LINE ELECTRIC FEEDER LEFT

- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	98.5 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color	Price
710009	White	**€ 15.95**
710010	Light gray	**€ 15.95**
710011	Black	**€ 15.95**

IP20



D LINE ELECTRIC FEEDER RIGHT

- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	98.5 mm	Output Current	16 A
Width	35.2 mm		

Article	Housing Color	Price
710012	White	**€ 15.95**
710013	Light gray	**€ 15.95**
710014	Black	**€ 15.95**

IP20

Accessories
710089 D Line cover panel feed left/right **€ 3.95**

D LINE ELECTRICAL LONGITUDINAL CONNECTOR WITH FEED OPTION



- **Up to three phases (3x 16 A) can be fed in**
- **Power supply from above (from ceiling)**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	35 mm		

Article	Housing Color	Price
710042	White	**€ 32.95**
710043	Light gray	**€ 32.95**
710044	Black	**€ 32.95**

IP20

Accessories
710090 D Line/Dali cover panel for longitudinal connector, white **€ 3.95**



D LINE FLEX CONNECTOR LEFT-RIGHT

- **Compensates for height or angle differences within a track system**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	248 mm	Output Current	16 A
Width	35 mm		

Article	Housing Color	Price
710039	White	**€ 42.95**
710040	Light gray	**€ 42.95**
710041	Black	**€ 42.95**

IP20

D LINE ELECTRIC CONNECTOR

- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	26.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	68 mm	Output Current	16 A
Width	20.5 mm		

Article	Housing Color	Price
710015	White	**€ 9.95**
710016	Light gray	**€ 9.95**
710017	Black	**€ 9.95**

IP20

D LINE MECHANICAL CONNECTOR

- **Mechanical connector without electrical contacts**
- **For electrical separation of two different power circuits within one track system**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	20 mm
Mounting Type	Top mounting	Height	27 mm
Length	66.4 mm		

Article	Housing Color	Price
710018	White	**€ 6.95**
710019	Light gray	**€ 6.95**
710020	Black	**€ 6.95**

IP20

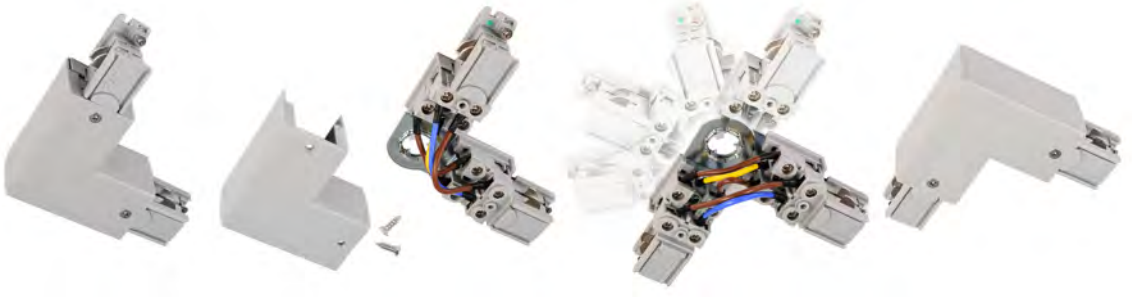



D LINE 90° CONNECTOR LEFT-RIGHT WITH REVERSAL MECHANISM

- **With reversal mechanism for switching the orientation between left and right**
- **Suitable for surface-mounted and recessed systems**

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	100.7 mm	Output Current	16 A
Width	100.7 mm		

Article	Housing Color	Price
710036	White	**€ 34.95**
710037	Light gray	**€ 34.95**
710038	Black	**€ 34.95**

IP20

Accessories

710091 D Line/Dali cover panel for 90° connector, white **€ 3.95**



D LINE T-CONNECTOR LEFT-LEFT-RIGHT WITH REVERSAL MECHANISM

- **with reversal mechanism for switching the orientation between left / right**
- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	101 mm		

Article	Housing Color	Price
710027	White	**€ 49.95**
710028	Light gray	**€ 49.95**
710029	Black	**€ 49.95**

IP20



D LINE T-CONNECTOR RIGHT/RIGHT/LEFT WITH EXCHANGE MECHANICS

- **with reversal mechanism for switching the orientation between left / right**
- **suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	101 mm		

Article	Housing Color	Price
710030	White	**€ 49.95**
710031	Light gray	**€ 49.95**
710032	Black	**€ 49.95**

IP20

Accessories
710093 D Line/Dali cover panel for T-connector, white **€ 3.95**



D LINE X-CONNECTOR LEFT-LEFT-RIGHT-RIGHT

- **Easy to install**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Mounting Type	Top mounting	Rated Input Voltage	220-440 V/AC
Length	166 mm	Output Current	16 A
Width	166 mm		

Article	Housing Color	Price
710033	White	**€ 66.95**
710034	Light gray	**€ 66.95**
710035	Black	**€ 66.95**

IP20

Accessories

710092	D Line/Dali cover panel for X-connector, white	**€ 4.95**

D LINE COVER PANEL

- **Suitable for surface-mounted and recessed systems**
- **For sealing publicly accessible busbars within a contact zone of less than 2.30 m**

Housing	Plastic	Width	21.5 mm
Mounting Type	Top mounting	Height	7.5 mm
Length	1000 mm		

Article	Housing Color	Price
710077	White	**€ 5.95**
710079	Black	**€ 5.95**

D LINE END CAP

- **For closing open current track ends (touch protection)**
- **Easy to install**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	32.5 mm

Article	Housing Color	Mounting Type	Length	Width	Price
710066	White	Top mounting	31.3 mm	35.2 mm	**€ 2.95**
710067	Light gray	Top mounting	31.3 mm	35.2 mm	**€ 2.95**
710068	Black	Top mounting	31.3 mm	35.2 mm	**€ 2.95**
710103	White	Installation mounting	56 mm	47.9 mm	**€ 2.95**

D LINE MOUNTING BRACKET FLEX

- **Suitable for surface-mounted systems**
- **Simplifies installation of complex shapes**
- **Current track can still be slid during installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	33.8 mm
Mounting Type	Top mounting	Height	12.5 mm
Length	40 mm		

Article	Housing Color	Price
710063	White	**€ 5.95**
710064	Light gray	**€ 5.95**
710065	Black	**€ 5.95**

NEW

D LINE WALL BRACKET

- **Suitable for surface-mounted systems**
- **Simplifies installation of current tracks near walls**
- **Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	25 mm
Mounting Type	Top mounting	Height	80 mm
Length	91.9 mm		

Article	Housing Color	Price
710104	White	**€ 14.95**
710105	Light gray	**€ 14.95**
710106	Black	**€ 14.95**

IP20

D LINE SUSPENSION CONNECTION BRACKET

- **Suitable for surface-mounted systems**
- **For chain installation or similar (chain not included in the scope of delivery)**

Housing	Metal	Width	32 mm
Mounting Type	Top mounting	Height	20 mm
Length	181 mm		

Article	Housing Color	Price
710057	White	**€ 9.95**
710058	Light gray	**€ 9.95**
710059	Black	**€ 9.95**

D LINE CEILING SUSPENSION RIGID

- **Sturdy, elegant ceiling hanger**
- **Suitable for surface-mounted systems**
- **Hanger dimension 635 mm (can be shortened to 335 mm)**
- **Hanger can be extended with accessories**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	635 mm
Mounting Type	Top mounting	Width	60 mm

Article	Housing Color	Price
710078	White	**€ 32.95**
710084	Black	**€ 32.95**
710085	Light gray	**€ 32.95**

D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- **Suitable for rigid ceiling hangers**
- **Extends the hanger length by 300 mm**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	310 mm
Mounting Type	Top mounting	Width	10 mm

Article	Housing Color	Price
710086	White	**€ 5.95**
710087	Black	**€ 5.95**
710088	Light gray	**€ 5.95**

D LINE ROPE SUSPENSION BRACKET

- **Can be cut to length for suspension dimension: 120-1,500 mm**
- **suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	52 mm
Length	120 mm		

Article	Housing Color	Price
710048	White	**€ 14.95**
710049	Light gray	**€ 14.95**
710050	Black	**€ 14.95**

Accessories
710081 D Line/Dali cable for cable suspension 4.0 m **€ 7.95**

D LINE ROPE SUSPENSION BRACKET MINI

- **Stylish and sophisticated suspended mounting**
- **Can be cut to length for hanger lengths: 90-4,960 mm**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	58 mm
Length	120 mm		

Article	Housing Color	Price
710094	White	**€ 19.95**
710095	Light gray	**€ 19.95**
710096	Black	**€ 19.95**

D LINE FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Current track can be installed without tools using knurled thumb screw and spring clamps**
- **Quick installation and removal for e.g. trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710082	Black	**€ 10.95**

D LINE TRUSS ADAPTER

- **Suitable for surface-mounted systems**
- **Quick-action couplers for fast mounting of current tracks on cross rail structures**
- **Fits all 50 mm aluminium cross rails in event/trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710083	Silver	**€ 29.95**

This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.

D LINE GRID CEILING FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Quick and easy to install on grid ceilings**
- **Mechanical load up to 15.0 kg/150 N**
- **Suitable for 22-24 mm ceiling grid support rails**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	11 mm
Length	120 mm		

Article	Housing Color	Price
710051	White	**€ 11.95**
710052	Light gray	**€ 11.95**
710053	Black	**€ 11.95**

D LINE 3-PHASE ADAPTER FOR LIGHT INSTALLATION

- **Suitable for surface-mounted and recessed systems**
- **Includes reduction bush, M10 flat nut and strain relief grommet**
- **Easy to install**
- **Integrated secondary drop protection**
- **Max. load 10 kg/100 N**

Housing	Plastic	Height	54 mm
Mounting Type	Top mounting	Rated Input Voltage	220-240 V/AC
Length	84 mm	Output Current	10 A
Width	32 mm		

Article	Housing Color	Price
710097	White	**€ 18.95**
710098	Light gray	**€ 18.95**
710099	Black	**€ 18.95**

IP20

D LINE THREE-PHASE ADAPTER WITH INTEGRATED MULTI CC POWER SUPPLY

- **Suitable for surface-mounted and recessed systems**
- **Integrated secondary drop protection**
- **Supplied with trumpet nipple and M10 flat nut**
- **Stable integrated adjustable power supply [CC]**
- **Check suitability of the intended lamp**
- **Max. 10 kg/100 N**
- **Exclusively for D LINE, Ivela and Hoffmeister three-phase current tracks**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	41 mm
Length	162 mm	Rated Input Voltage	220-240 V/AC
Width	31 mm	Mounting Location	Inside

Article		Output Current Selectable	Power	Output Voltage	Price
862180	☐	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	**€ 32.95**
862183	■	250 mA / 350 mA / 450 mA / 500 mA	6.2-21.0 W	25-42 V/DC	**€ 32.95**
862181	☐	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	**€ 35.95**
862184	■	600 mA / 700 mA / 750 mA / 800 mA	15.0-33.0 W	25-42 V/DC	**€ 35.95**
862182	☐	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	**€ 37.95**
862185	■	850 mA / 900 mA / 950 mA / 1050 mA	22.0-44.0 W	27-42 V/DC	**€ 37.95**

Phase

D LINE SOCKET ADAPTER

- **easy to install**
- **suitable for surface-mounted and recessed systems**
- **as power distribution system in current tracks**
- **max. 1,380 W**
- **integrated plug fuse**

Housing	Plastic	Width	53.5 mm
Mounting Type	Top mounting, Installation mounting	Height	103 mm
		Rated Input Voltage	230 V/AC
Length	58.5 mm	Output Current	6 A

Article	Housing Color	Price
710024	White	**€ 28.95**
710025	Light gray	**€ 28.95**
710026	Black	**€ 28.95**

IP20

D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- **Suitable for surface-mounted and recessed systems**
- **Mounting adapter (M6 thread) for holding additional devices and lights**
- **Ideal for use with optional D Line socket adapter**
- **Load max. 10 kg/100 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal, Plastic	Width	31.5 mm
Mounting Type	Top mounting	Height	84 mm
Length	66.5 mm		

Article	Housing Color	Price
710054	White	**€ 10.95**
710055	Light gray	**€ 10.95**
710056	Black	**€ 10.95**

D LINE SIGN HOOK

- **Suitable for surface-mounted and recessed systems**
- **Hook for attaching information signs etc.**
- **Load max. 5kg / 50N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Steel	Height	52 mm
Mounting Type	Top mounting	Ø	25 mm

Article	Housing Color	Price
710060	White	**€ 2.95**
710061	Light gray	**€ 2.95**
710062	Black	**€ 2.95**

D LINE DALI system

page 348

page 352

page 357

page 357

page 358

page 359

page 359

page 360

page 360

page 363

page 366

page 366

page 367

page 376

page 377

page 378

page 380

page 380

page 381

page 381

page 382

page 383

page 384

page 384

page 385

D LINE DALI MOUNTING POWER RAIL SYSTEM 3-PHASE 220-440V

mounting modules	illust.	white	black	page
mounting power rail L: 1000 mm	01	**710500**	**710501**	376
mounting power rail L: 2000 mm	01	**710502**	**710503**	376
mounting power rail L: 3000 mm	01	**710504**	**710505**	376
mounting adapter for lights	02	**710512**	**710513**	377
live end feeder left	03	**710514**	**710515**	380
live end feeder right side	04	**710516**	**710517**	380
electrical straight connector with center feed option	05	**710520**	**710521**	381
flexible-connector left-right side	06	**710523**	**710524**	381
electrical joint	07	**710525**	**710526**	382
mechanical joint	08	**710018**	**710020**	382
90°-joint left-right with exchange mechanism	09	**710527**	**710528**	383
T-joint left-left-right with exchange mechanism	10	**710530**	**710531**	384
T-joint right-right-left with exchange mechanism	11	**710532**	**710533**	384
X-joint left-left-right-right	12	**710535**	**710536**	385
cover plate	13	**710077**	**710079**	386
endcap	14	**710066**	**710068**	386
ceiling mounting bracket flex	15	**710063**	**710065**	387
suspension clamp for track connection	16	**710057**	**710059**	388
ceiling suspension rigid [635 mm] with canopy	17	**710078**	**710084**	389
extension for ceiling suspension [300 mm]	17	**710086**	**710087**	389
wire suspension bracket with ceiling rosette 1500 mm	18	**710048**	**710050**	390
rope suspension bracket Mini mit Abhängeseil 5000 mm	19	**710094**	**710096**	390
quick mounting bracket for grid ceilings	20	**710051**	**710053**	393
wall bracket	21	**710104**	**710106**	387
truss adapter | silver coloured	22	**710083**	**710083**	391
quick mounting clamp for exhibition stand construction	23	-	**710082**	391
3-circuits adapter for light installation	24	**710539**	**710540**	394
electrical outlet adapter	25	**710024**	**710026**	394
mounting adapter for additional components max. 10kg	26	**710054**	**710056**	395
signs hook, max. load 5kg	27	**710060**	**710062**	395

ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

01


02


03

04

05


06


07

08

09


10


11


12


13

14

15

16


17


18


19


20


21


22


23

24


25


26

27

D LINE DALI BUILT IN POWER RAL SYSTEM 3-PHASE 220-440V

built in modules	illust.	white	cover	black	cover	page
built in power rail L:1000 mm	01	**710506**	-	**710507**	-	378
built in power rail L: 2000 mm	01	**710508**	-	**710509**	-	378
built in power rail L: 3000 mm	01	**710510**	-	**710511**	-	378
eletric feeder left side	02+18	**710514**	**710518**	**710515**	**710519**	380
electric feeder right side	03+18	**710516**	**710518**	**710517**	**710519**	380
electrical straight connector with center feed option	04+19	**710520**	**710090**	**710521**	**710522**	381
electrical joint	05	**710525**	-	**710526**	-	382
mechanical joint	06	**710018**	-	**710020**	-	382
90°-joint left-right	07+20	**710527**	**710091**	**710528**	**710529**	383
T-joint left-left-right	08+21	**710530**	**710093**	**710531**	**710534**	384
T-joint right-right-left	09+21	**710532**	**710093**	**710533**	**710534**	384
X-joint left-left-right-right	10+22	**710535**	**710092**	**710536**	**710537**	385
cover plate	11	**710077**	-	**710079**	-	386
endcap	12	**710103**	-	**710538**	-	386
quick-mounting bracket for installation rail	13	**710107**	-	-	-	379
3-circuits adapter for light installation	14	**710539**	-	**710540**	-	394
electrical outlet adapter	15	**710024**	-	**710026**	-	394
mounting adapter for additional components max. 10kg	16	**710054**	-	**710056**	-	395
signs hook, max. load 5kg	17	**710060**	-	**710062**	-	395

710535

710092

Unlike other Dali systems, you do not need any additional or special electrical components such as feeders, connectors, corners or T-connectors for the recessed tracks, corners or T-connectors. All the standard components of the system are used and only the matching plastic cover is replaced; the recessed version is ready. This simplifies stock-keeping and also provides significantly more flexibility.

ILLUSTRATIONS WITH PLANNING RELEVANT DIMENSIONS

01


02

03

04


05

06

07


08


09


10


11

12

13


14


15


16

17

18


19


20


21


22


FIXING POINTS

power rail	a	b	c	d
1000 mm	125 mm			
2000 mm	125 mm	995 mm		
3000 mm	125 mm		914 mm	1172 mm

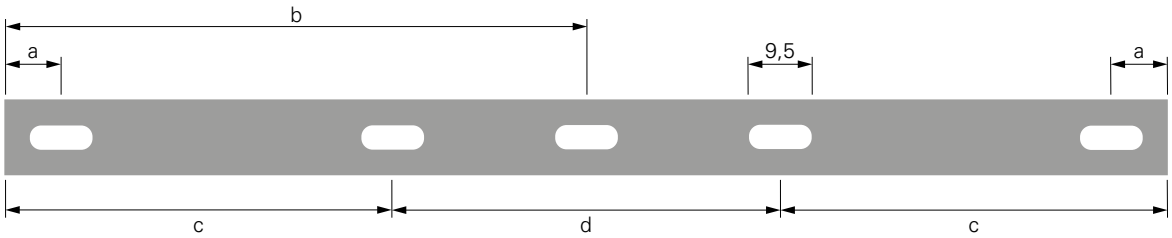

MECHANICAL LOAD TRACK POWER RAIL 1000 MM

60 N ≙ 6,12 kg
dimension in mm

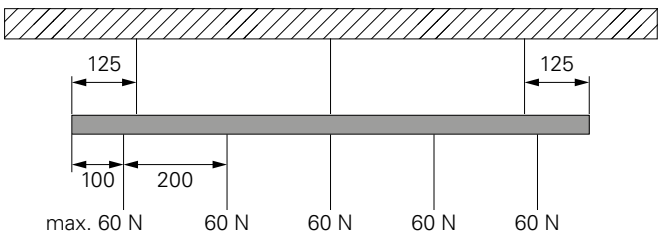

MECHANICAL LOAD TRACK POWER RAIL 2000/3000 MM

30 N ≙ 3,06 kg
dimension in mm

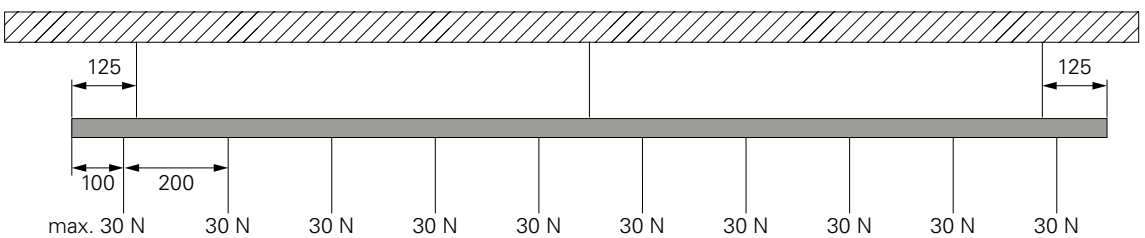

PLANNING GUIDE D LINE DALI MOUNTING POWER RAIL SYSTEM 220-440V



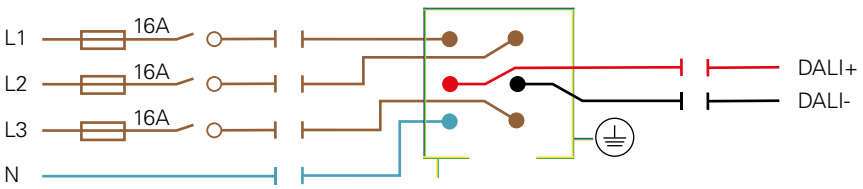

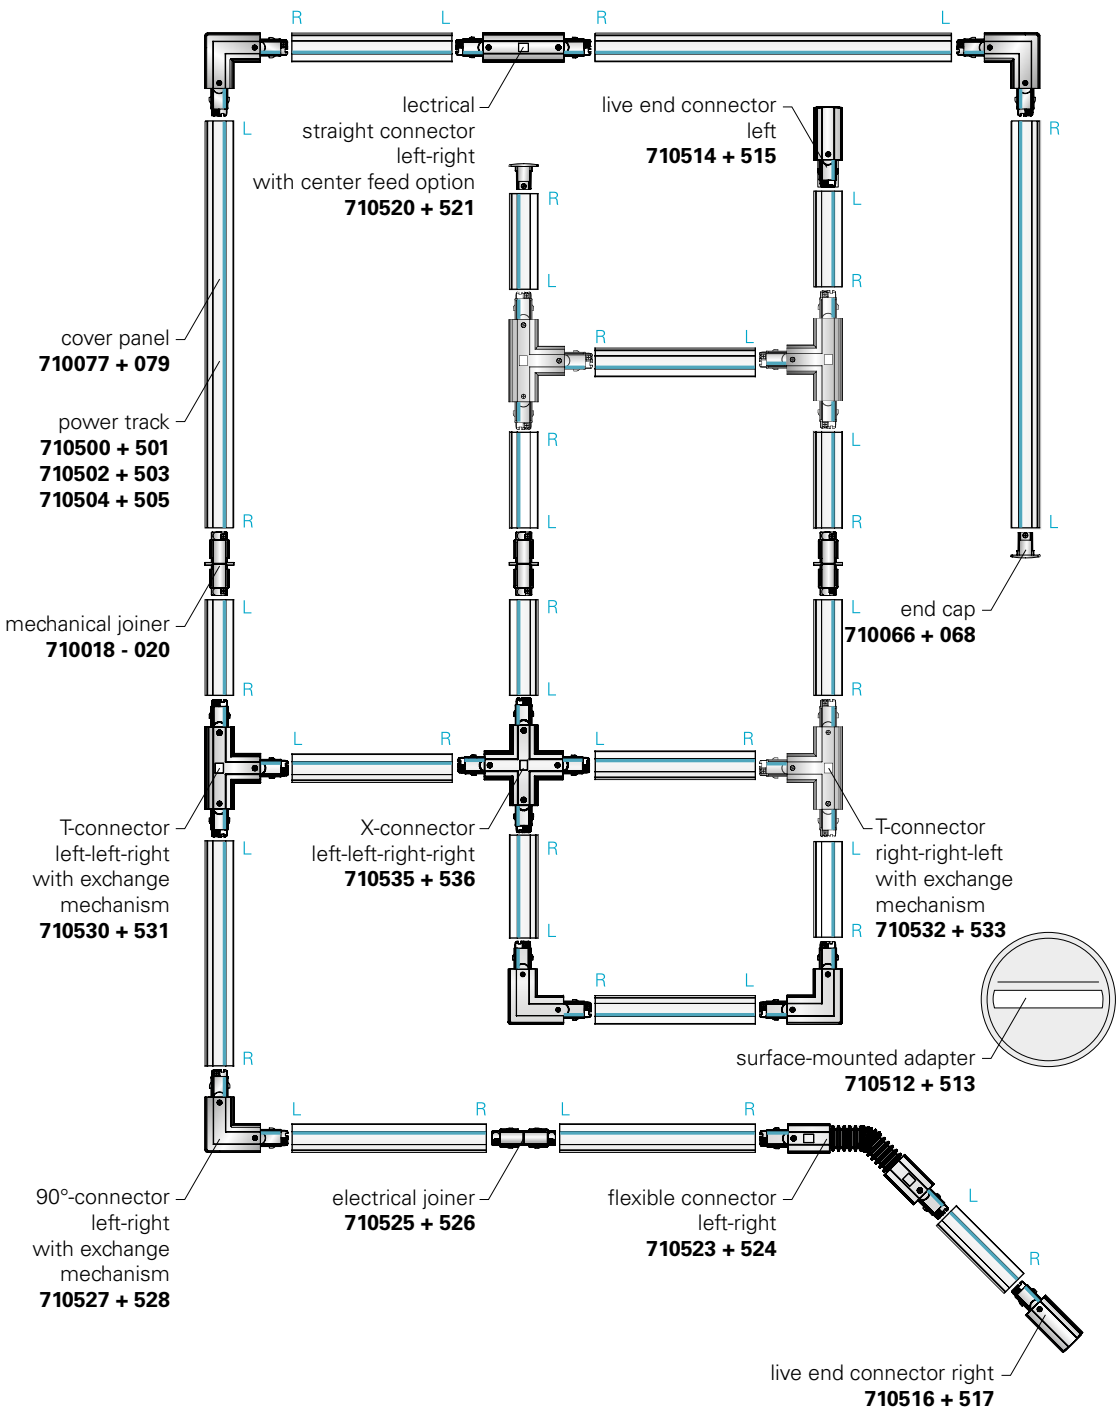

D LINE DALI SURFACE-MOUNTED TRACK RAIL

- **Can be controlled with DALI**
- **Up to three phases [3x 16 A] can be fed in**
- **Cutting tool required for in-house assembly**
- **Numerous attachment options**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Aluminium	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A
Height	35.5 mm		

Article	Housing Color	Length	Price
710500	White	1000 mm	**€ 48.95**
710501	Black	1000 mm	**€ 48.95**
710502	White	2000 mm	**€ 92.95**
710503	Black	2000 mm	**€ 92.95**
710504	White	3000 mm	**€ 134.95**
710505	Black	3000 mm	**€ 134.95**

IP20

Accessories
931066 D LINE DALI, cut-back tool for shortening the DALI wires **€ 199.95**

Accessories for **710500**, **710502**, **710504**
710077 D Line/Dali cover panel for integrated busbar, white **€ 5.95**

Accessories for **710501**, **710503**, **710505**
710079 D Line/Dali cover panel for integrated busbar, black **€ 5.95**

DALI

D LINE DALI SURFACE-MOUNTED ADAPTER

- **Can be controlled with DALI**
- **Surface-mounted housing for converting busbar spotlights**
- **Single phase (1x 16 A) feed**
- **Easy to install**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Height	35 mm	Output Current	16 A
Ø	143 mm		

Article	Housing Color	Price
710512	White	**€ 34.95**
710513	Black	**€ 34.95**

IP20

D LINE DALI RECESSED TRACK RAIL

- **Can be controlled with DALI**
- **Up to three phases [3x 16 A] can be fed in**
- **Cutting tool required for in-house assembly**
- **Numerous attachment options**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Aluminium	Rated Input Voltage	220-440 V/AC
Width	56 mm	Output Current	16 A
Height	35.5 mm		

Article	Housing Color	Length	Price
710506	White	1000 mm	**€ 57.95**
710507	Black	1000 mm	**€ 57.95**
710508	White	2000 mm	**€ 104.95**
710509	Black	2000 mm	**€ 104.95**
710510	White	3000 mm	**€ 149.95**
710511	Black	3000 mm	**€ 149.95**

IP20

Accessories
931066 D LINE DALI, cut-back tool for shortening the DALI wires **€ 199.95**

Accessories for **710506**, **710508**, **710510**
710077 D Line/Dali cover panel for integrated busbar, white **€ 5.95**

Accessories for **710507**, **710509**, **710511**
710079 D Line/Dali cover panel for integrated busbar, black **€ 5.95**

D LINE QUICK-MOUNTING BRACKET FOR INSTALLATION RAIL

- **Suitable for recessed system**
- **Simplifies installation of recessed current tracks**
- **No additional substructure is required for mounting**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Steel	Width	45 mm
Mounting Type	Installation mounting	Height	25 mm
Length	70 mm		

Article	Housing Color	Price
710107	Silver	**€ 4.95**

IP20



D LINE DALI ELECTRIC FEEDER LEFT

- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	139 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710514	White	**€ 18.95**
710515	Black	**€ 18.95**

IP20



D LINE DALI ELECTRIC FEEDER RIGHT

- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power can be fed in from above (ceiling) or from the side**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	139 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710516	White	**€ 18.95**
710517	Black	**€ 18.95**

IP20

Accessories for **710516**
710518 D Line DALI cover panel feed left/right, white **€ 3.95**

Accessories for **710517**
710519 D Line DALI cover panel feed left/right, black **€ 3.95**

D LINE DALI STRAIGHT CONNECTOR WITH FEED OPTION



- **Can be controlled using DALI**
- **Up to three phases (3x 16 A) can be fed in**
- **Power supply from above (ceiling)**
- **Suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710520	White	**€ 34.95**
710521	Black	**€ 34.95**

IP20

Accessories for **710520**
710090 D Line/Dali cover panel for longitudinal connector, white **€ 3.95**

Accessories for **710521**
710522 D Line DALI cover panel for longitudinal connector, black **€ 3.95**

D LINE DALI FLEX CONNECTOR



- **Can be controlled using DALI**
- **Easy to install**
- **Compensates for height or angle differences within a track system**
- **Suitable for surface-mounted systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	285 mm	Rated Input Voltage	220-440 V/AC
Width	35.2 mm	Output Current	16 A

Article	Housing Color	Price
710523	White	**€ 46.95**
710524	Black	**€ 46.95**

IP20

D LINE DALI ELECTRIC CONNECTOR

- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	26.5 mm
Length	107 mm	Rated Input Voltage	220-440 V/AC
Width	20.5 mm	Output Current	16 A

Article	Housing Color	Price
710525	White	**€ 11.95**
710526	Black	**€ 11.95**

IP20

D LINE MECHANICAL CONNECTOR

- **Mechanical connector without electrical contacts**
- **For electrical separation of two different power circuits within one track system**
- **Suitable for surface-mounted and recessed systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Width	20 mm
Mounting Type	Top mounting	Height	27 mm
Length	66.4 mm		

Article	Housing Color	Price
710018	White	**€ 6.95**
710020	Black	**€ 6.95**

IP20

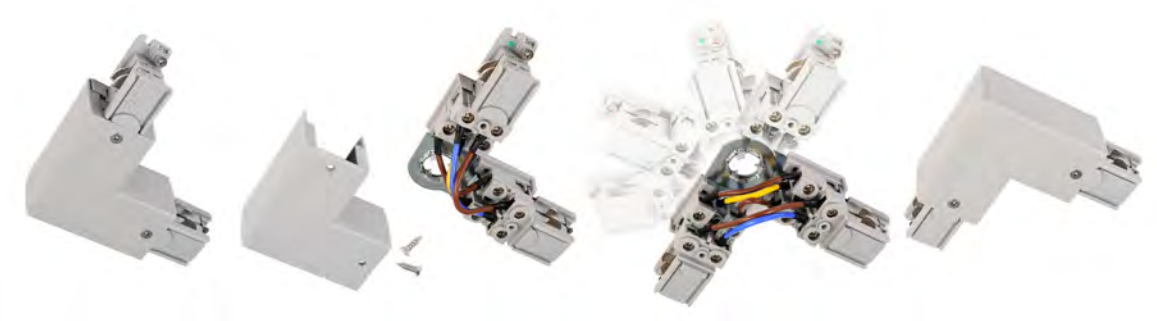

DALI

D LINE DALI 90°-CONNECTOR



- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	119 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710527	White	**€ 38.95**
710528	Black	**€ 38.95**

IP20

Accessories for **710527**
710091 D Line/Dali cover panel for 90° connector, white **€ 3.95**

Accessories for **710528**
710529 D Line DALI cover panel for 90° connector, black **€ 3.95**



D LINE DALI T-CONNECTOR LEFT-LEFT-RIGHT

- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710530	White	**€ 54.95**
710531	Black	**€ 54.95**

IP20



D LINE DALI T-CONNECTOR RIGHT-RIGHT-LEFT

- **with reversal mechanism for switching the orientation between left and right**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	119 mm	Output Current	16 A

Article	Housing Color	Price
710532	White	**€ 54.95**
710533	Black	**€ 54.95**

IP20

Accessories for **710532**
710093 D Line/Dali cover panel for T-connector, white **€ 3.95**

Accessories for **710533**
710534 D Line DALI cover panel for T-connector, black **€ 3.95**



D LINE DALI X-CONNECTOR

- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	35.5 mm
Length	203 mm	Rated Input Voltage	220-440 V/AC
Width	203 mm	Output Current	16 A

Article	Housing Color	Price
710535	White	**€ 69.95**
710536	Black	**€ 69.95**

IP20

Accessories for **710535**
710092 D Line/Dali cover panel for X-connector, white **€ 4.95**

Accessories for **710536**
710537 D Line DALI cover panel for X-connector, black **€ 4.95**

D LINE COVER PANEL

- **Suitable for surface-mounted and recessed systems**
- **For sealing publicly accessible busbars within a contact zone of less than 2.30 m**

Housing	Plastic	Width	21.5 mm
Mounting Type	Top mounting	Height	7.5 mm
Length	1000 mm		

Article	Housing Color	Price
710077	White	**€ 5.95**
710079	Black	**€ 5.95**

D LINE END CAP

- **For closing open current track ends (touch protection)**
- **Easy to install**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic	Height	32.5 mm

Article	Housing Color	Mounting Type	Length	Width	Price
710066	White	Top mounting	31.3 mm	35.2 mm	**€ 2.95**
710068	Black	Top mounting	31.3 mm	35.2 mm	**€ 2.95**
710103	White	Installation mounting	56 mm	47.9 mm	**€ 2.95**
710538	Black	Installation mounting	56 mm	47.9 mm	**€ 2.95**

D LINE MOUNTING BRACKET FLEX

- **Suitable for surface-mounted systems**
- **Simplifies installation of complex shapes**
- **Current track can still be slid during installation**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	33.8 mm
Mounting Type	Top mounting	Height	12.5 mm
Length	40 mm		

Article	Housing Color	Price
710063	White	**€ 5.95**
710065	Black	**€ 5.95**

D LINE WALL BRACKET

- **Suitable for surface-mounted systems**
- **Simplifies installation of current tracks near walls**
- **Ideal for illuminating pictures and objects, for example in exhibitions, collections and museums**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	25 mm
Mounting Type	Top mounting	Height	80 mm
Length	91.9 mm		

Article	Housing Color	Price
710104	White	**€ 14.95**
710106	Black	**€ 14.95**

IP20

D LINE SUSPENSION CONNECTION BRACKET

- **Suitable for surface-mounted systems**
- **For chain installation or similar (chain not included in the scope of delivery)**

Housing	Metal	Width	32 mm
Mounting Type	Top mounting	Height	20 mm
Length	181 mm		

Article	Housing Color	Price
710057	White	**€ 9.95**
710059	Black	**€ 9.95**

D LINE CEILING SUSPENSION RIGID

- **Sturdy, elegant ceiling hanger**
- **Suitable for surface-mounted systems**
- **Hanger dimension 635 mm (can be shortened to 335 mm)**
- **Hanger can be extended with accessories**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	635 mm
Mounting Type	Top mounting	Width	60 mm

Article	Housing Color	Price
710078	White	**€ 32.95**
710084	Black	**€ 32.95**

D LINE EXTENSION FOR CEILING SUSPENSION RIGID

- **Suitable for rigid ceiling hangers**
- **Extends the hanger length by 300 mm**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Length	310 mm
Mounting Type	Top mounting	Width	10 mm

Article	Housing Color	Price
710086	White	**€ 5.95**
710087	Black	**€ 5.95**

D LINE ROPE SUSPENSION BRACKET

- **Can be cut to length for suspension dimension: 120-1,500 mm**
- **suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	52 mm
Length	120 mm		

Article	Housing Color	Price
710048	White	**€ 14.95**
710050	Black	**€ 14.95**

Accessories
710081 D Line/Dali cable for cable suspension 4.0 m **€ 7.95**

D LINE ROPE SUSPENSION BRACKET MINI

- **Stylish and sophisticated suspended mounting**
- **Can be cut to length for hanger lengths: 90-4,960 mm**
- **Suitable for surface-mounted systems**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	58 mm
Length	120 mm		

Article	Housing Color	Price
710094	White	**€ 19.95**
710096	Black	**€ 19.95**

D LINE FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Current track can be installed without tools using knurled thumb screw and spring clamps**
- **Quick installation and removal for e.g. trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710082	Black	**€ 10.95**

D LINE TRUSS ADAPTER

- **Suitable for surface-mounted systems**
- **Quick-action couplers for fast mounting of current tracks on cross rail structures**
- **Fits all 50 mm aluminium cross rails in event/trade fair construction**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Aluminium	Width	30 mm
Mounting Type	Top mounting	Height	11.9 mm
Length	40 mm		

Article	Housing Color	Price
710083	Silver	**€ 29.95**

This little »jack-of-all-trades« makes mounting a track on an existing grid ceiling child's play. The installation time is only a fraction of what it used to be. In the first step, the clip is simply clicked into the visible metal strips of the grid ceiling and is held bomb-proof on the ceiling by means of a safety spring clip. After that, the conductor rail is simply pushed onto it and the installation is finished.

D LINE GRID CEILING FAST-MOUNTING BRACKET

- **Suitable for surface-mounted systems**
- **Quick and easy to install on grid ceilings**
- **Mechanical load up to 15.0 kg/150 N**
- **Suitable for 22-24 mm ceiling grid support rails**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal	Width	31 mm
Mounting Type	Top mounting	Height	11 mm
Length	120 mm		

Article	Housing Color	Price
710051	White	**€ 11.95**
710053	Black	**€ 11.95**

D LINE DALI THREE-PHASE ADAPTER FOR INSTALLING LAMPS

- **can be controlled with DALI, up to three phases can be fed in**
- **easy to install**
- **suitable for surface-mounted and recessed systems**

Application Area
Reception / Communication, Corridor / stairwell, Home / Living, Office / conference, Shop / Retail / Sales area

Housing	Plastic	Height	51 mm
Length	113 mm	Rated Input Voltage	220-240 V/AC
Width	32 mm	Output Current	10 A

Article	Housing Color	Price
710539	White	**€ 23.95**
710540	Black	**€ 23.95**

IP20

D LINE SOCKET ADAPTER

- **easy to install**
- **suitable for surface-mounted and recessed systems**
- **as power distribution system in current tracks**
- **max. 1,380 W**
- **integrated plug fuse**

Housing	Plastic	Width	53.5 mm
Mounting Type	Top mounting, Installation mounting	Height	103 mm
		Rated Input Voltage	230 V/AC
Length	58.5 mm	Output Current	6 A

Article	Housing Color	Price
710024	White	**€ 28.95**
710026	Black	**€ 28.95**

IP20

D LINE MOUNTING ADAPTER FOR ADDITIONAL COMPONENTS

- **Suitable for surface-mounted and recessed systems**
- **Mounting adapter (M6 thread) for holding additional devices and lights**
- **Ideal for use with optional D Line socket adapter**
- **Load max. 10 kg/100 N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Metal, Plastic	Width	31.5 mm
Mounting Type	Top mounting	Height	84 mm
Length	66.5 mm		

Article	Housing Color	Price
710054	White	**€ 10.95**
710056	Black	**€ 10.95**

D LINE SIGN HOOK

- **Suitable for surface-mounted and recessed systems**
- **Hook for attaching information signs etc.**
- **Load max. 5kg / 50N**

Application Area
Home / Living, Shop / Retail / Sales area

Housing	Plastic, Steel	Height	52 mm
Mounting Type	Top mounting	Ø	25 mm

Article	Housing Color	Price
710060	White	**€ 2.95**
710062	Black	**€ 2.95**

3-phases power luminaires

page 398

page 399

page 399

page 400

page 402

page 402

page 403

page 406

page 407

page 408

page 409

page 410

page 411

page 413

page 414

page 416

page 418

page 420

page 421

page 422

page 423

page 425

page 430

page 431

page 432

page 433

page 436

page 438

page 439

page 440

page 441

page 442

Phase

PANEL TRACK LIGHT

- **Ideal for homogeneous basic lighting**
- **Can be rotated and swivelled**
- **High luminous flux**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	110-240 V/AC
Length	300 mm	Power Supply Unit incl.	Yes
Width	110 mm	Light Beam Angle	110 Degree
Height	8.5 mm	Swivelling Angle	90 Degree
Power	20 W	CRI (Ra)	80



707134

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707134	White	WW 3000 K	2000 lm	**€ 114.95**
707135	Black	WW 3000 K	2000 lm	**€ 114.95**
707136	White	NW 4000 K	2200 lm	**€ 109.95**
707137	Black	NW 4000 K	2200 lm	**€ 109.95**

FLOOD SMD 15 W

- **Can be rotated and swivelled**
- **Large tilt angle**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	192 mm	Power Supply Unit incl.	Yes
Width	180 mm	Light Beam Angle	90 Degree
Height	38 mm	Swivelling Angle	180 Degree
Base Length	179 mm	CRI (Ra)	80
Base Width	20 mm	IK Protection Class	IK07
Power	15 W		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707130	White	WW 3000 K	1575 lm	**€ 99.95**
707138	White	NW 4000 K	1650 lm	**€ 99.95**

IP20 A↑G E

FLOOD SMD 30 W

- **Can be rotated and swivelled**
- **Large tilt angle**

Application Area
Shop / Retail / Sales area, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	261 mm	Power Supply Unit incl.	Yes
Width	236 mm	Light Beam Angle	90 Degree
Height	41 mm	Swivelling Angle	180 Degree
Base Length	237 mm	CRI (Ra)	80
Base Width	25 mm	IK Protection Class	IK07
Power	30 W		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707139	White	WW 3000 K	3150 lm	**€ 139.95**
707140	White	NW 4000 K	3300 lm	**€ 139.95**

IP20 A↑G F

DRACONIS

The DRACONIS series from DEKO-LIGHT allows flexible ceiling lighting for a variety of applications in the areas of industry, trade and logistics. With the DRACONIS light for optional use as a surface-mounted ceiling light or in a 3-phase track system, the power [45, 55 or 72 W] and light colour [2,700, 3,500 or 4,000 K] can be flexibly adjusted using a switch on the back of the housing. To be able to integrate the DRACONIS into almost any environment, we offer several lenses for asymmetrical or symmetrical lighting in different light emission angles. The maximum luminous flux is 8,250 lumens.

DRACONIS

- **Output adjustable in three stages**
- **Light colour adjustable in three stages**
- **High luminous flux**
- **Replaceable lenses**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium	Base Width	88 mm
Colour Temperature	2700/3500/4000 K	Base Height	25 mm
Luminous Flux	7330/8210/8250 lm	Power Selectable	45 W, 55 W, 72 W
Length	577.6 mm	Rated Input Voltage	220-240 V/AC
Width	188.6 mm	Power Supply Unit incl.	Yes
Height	128.7 mm	Light Beam Angle	60 Degree
Base Length	102 mm	CRI (Ra)	80

Article	Housing Color		Price
620119	Light gray	WW NW	**€ 349.95**
620120	White	WW NW	**€ 349.95**

IP20 A ↑ G E

Accessories

930544	20° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930545	30° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930546	90° lens for surface-mounted ceiling lamp Draconis, symmetrical	**€ 9.95**
930577	15° lens for surface-mounted ceiling lamp Draconis, asymmetrical	**€ 9.95**

page 102

Phase

LINEAR 60

- **low height**
- **homogeneous illumination**

Application Area
Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

Housing	Aluminium	Power	18 W
Surface	Matt	Rated Input Voltage	200-240 V/AC
Length	687 mm	Power Supply Unit incl.	Yes
Width	32 mm	Light Beam Angle	110 Degree
Height	62 mm	CRI (Ra)	80

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707148	Black	WW 3000 K	1950 lm	**€ 143.95**
707147	White	WW 3000 K	2100 lm	**€ 143.95**
707150	Black	NW 4000 K	2100 lm	**€ 143.95**
707149	White	NW 4000 K	2300 lm	**€ 143.95**



Phase

LINEAR 100

- **low height**
- **homogeneous illumination**

Application Area
Shop / Retail / Sales area, Home / Living, Trade fair construction / shop fitting, Hotel / catering

Housing	Aluminium	Power	28 W
Surface	Matt	Rated Input Voltage	200-240 V/AC
Length	1087 mm	Power Supply Unit incl.	Yes
Width	32 mm	Light Beam Angle	110 Degree
Height	62 mm	CRI (Ra)	80

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707152	Black	WW 3000 K	3100 lm	**€ 184.95**
707151	White	WW 3000 K	3200 lm	**€ 184.95**
707154	Black	NW 4000 K	3200 lm	**€ 184.95**
707153	White	NW 4000 K	3400 lm	**€ 184.95**



Phase · power switch · UGR<16

ALNITAK

- **power adjustable in four stages**
- **rotatable and swivelling**
- **low glare value**

Application Area
Reception / Communication, Office / conference, Home / Living, Trade fair construction / shop fitting, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	336 mm	Power Supply Unit incl.	Yes
Width	49 mm	Light Beam Angle	36 Degree
Height	98 mm	Swivelling Angle	25 Degree
Power Selectable	23 W, 28 W, 30 W, 32 W	CRI (Ra)	80



707110

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707110	White	WW 3000 K	3010 lm	**€ 169.95**
707112	Light gray	WW 3000 K	3020 lm	**€ 169.95**
707114	Black	WW 3000 K	3030 lm	**€ 169.95**
707113	Light gray	NW 4000 K	3050 lm	**€ 169.95**
707115	Black	NW 4000 K	3130 lm	**€ 169.95**
707111	White	NW 4000 K	3150 lm	**€ 169.95**

IP20

Accessories

930386	Reflector for lamp Ain, Alnitak 12°	**€ 1.95**
930387	Reflector for lamp Ain, Alnitak 48°	**€ 1.95**
930388	Ceti spot anti glare white	**€ 2.95**

LINEAR PRO

The LINEAR PRO 3-circuit track luminaires are the ideal solution for illuminating shelves and aisles in supermarkets and more.
The LINEAR PRO is a 3-phase luminaire and is available in three versions: FOLD, TILT and Standard. Each variant offers special advantages in lighting design and enables precise illumination of products and other objects. While the standard version has a particularly large, fixed beam angle of 120°, the LINEAR PRO TILT and LINEAR PRO FOLD can be flexibly aligned to the respective shop areas.

LINEAR PRO

LINEAR PRO TILT

LINEAR PRO FOLD

TILT or FOLD?

The LINEAR PRO TILT can either shine downwards as a whole or be swivelled individually by up to 30° to the side. In contrast, the LINEAR PRO FOLD is based on a three-part construction with two LED wings, which are supplemented by a diffuse light strip in the centre. This makes the LINEAR PRO FOLD particularly suitable for the homogeneous illumination of complete aisles with shelves on both sides, while the LINEAR PRO TILT can be flexibly aligned to individual shelves.

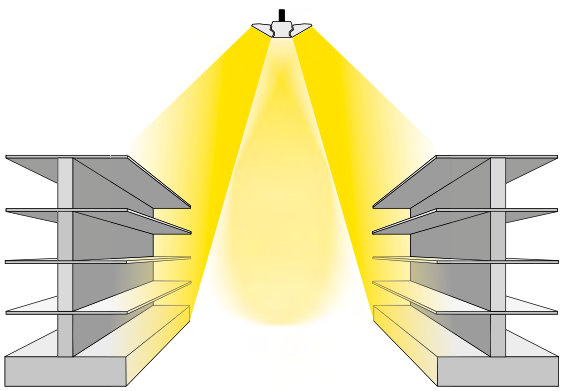

3 ADVANTAGES

ADJUSTABLE POWER

The power of the LINEAR PRO 3-circuit track lights can be adjusted in four stages. The luminaires are also DC-capable and can be integrated into emergency power systems.

BEG SUBSIDY

The LINEAR PRO luminaires fulfil the requirements of the BEG subsidy for efficient LED luminaires and are subsidised by the Federal Ministry for Economic Affairs and Climate Protection with 15%.

SEAMLESSLY COMBINABLE

The 1500 mm versions of the LINEAR PRO have a sliding track adapter and are each available in a 50% mirrored A/B version to allow for seamless side-by-side installation, even across track connectors.

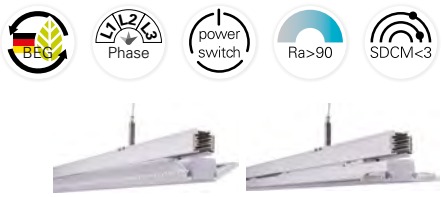

LINEAR PRO FOLD

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 100 %]**
- **Long service life of 60,000 hours [L80B50]**
- **Can be swivelled up to 30° to each side**
- **Particularly energy efficient**
- **Output adjustable in four steps**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Light Beam Angle	30 Degree
Width	120 mm	Light Beam Angle 2	90 Degree
Height	68 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		



707189

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Power Selectable	Price
707205	White	WW 3000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 174.95**
707206	Black	WW 3000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 174.95**
707207	White	WW 3000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 209.95**
707208	Black	WW 3000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 209.95**
707189	White	NW 4000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 174.95**
707190	Black	NW 4000 K	2900 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 174.95**
707191	White	NW 4000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 209.95**
707192	Black	NW 4000 K	7250 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 209.95**

LINEAR PRO FOLD DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Long service life of 60,000 hours [L80B50]**
- **Can be swivelled up to 30° on each side**
- **Power adjustable in four stages**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	1493 mm	Light Beam Angle	30 Degree
Width	120 mm	Light Beam Angle 2	90 Degree
Height	68 mm	Control	DALI 2 / DT6
Power	50 W	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03



707193

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707210	Black	WW 3000 K	7000 lm	**€ 239.95**
707209	White	WW 3000 K	7250 lm	**€ 239.95**
707194	Black	NW 4000 K	7000 lm	**€ 239.95**
707193	White	NW 4000 K	7250 lm	**€ 239.95**

LINEAR PRO TILT

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 100 %]**
- **Can be locked shining downwards**
- **Can be swivelled up to 30° to each side**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**
- **Output adjustable in three stages**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Steel	Light Beam Angle	60 Degree
Width	60 mm	Swivelling Angle	60 Degree
Height	54 mm	CRI (Ra)	90
Rated Input Voltage	198-264 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color	Colour Temperature	Luminous Flux	Length	Power Selectable	Price
707195	White	WW 3000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 153.95**
707196	Black	WW 3000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 153.95**
707197	White	WW 3000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 189.95**
707198	Black	WW 3000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 189.95**
707141	White	NW 4000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 153.95**
707142	Black	NW 4000 K	3200 lm	600 mm	14.0 W / 16.0 W / 18.0 W / 20.0 W	**€ 153.95**
707143	White	NW 4000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 189.95**
707144	Black	NW 4000 K	8000 lm	1493 mm	35.0 W / 40.0 W / 45.0 W / 50.0 W	**€ 189.95**

LINEAR PRO TILT DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Can be locked shining downwards**
- **Can be swivelled up to 30° to each side**
- **Power adjustable in four stages**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Steel	Power Supply Unit incl.	Yes
Luminous Flux	8000 lm	Light Beam Angle	60 Degree
Length	1493 mm	Swivelling Angle	60 Degree
Width	60 mm	Control	DALI 2 / DT6
Height	54 mm	CRI (Ra)	90
Power	50 W	IK Protection Class	IK03
Rated Input Voltage	198-264 V/AC		

Article	Housing Color	Colour Temperature	Price
707199	White	WW 3000 K	**€ 219.95**
707200	Black	WW 3000 K	**€ 219.95**
707145	White	NW 4000 K	**€ 219.95**
707146	Black	NW 4000 K	**€ 219.95**

IP20 EL

LINEAR PRO DALI

- **Eligible for BEG German federal funding for energy-efficient buildings**
- **Emergency power capable [198-264 V/DC EOFI: 15 %]**
- **Power adjustable in four stages**
- **Long service life of 60,000 hours [L80B50]**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Length	602 mm	Power Supply Unit incl.	Yes
Width	61.1 mm	Light Beam Angle	120 Degree
Height	58 mm	Control	DALI 2 / DT6
Power Selectable	14 W, 16 W, 18 W, 20 W	CRI (Ra)	90
		IK Protection Class	IK03

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707220	Black	WW 3000 K	2800 lm	**€ 143.95**
707219	White	WW 3000 K	2850 lm	**€ 143.95**
707222	Black	NW 4000 K	2850 lm	**€ 143.95**
707221	White	NW 4000 K	2900 lm	**€ 143.95**

CC IP20 EL

LINEAR PRO DALI CCT

- **Eligible for German BEG federal funding**
- **Can run on emergency power**
- **Power adjustable in four stages**
- **Long service life of 60,000 hours (L80B50)**
- **Particularly energy efficient**

Application Area
Reception / Communication, Shop / Retail / Sales area, Workshop / Craft / Warehouse, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting, Industry / production / high-bay warehouse, Safety lighting / emergency lighting

Housing	Aluminium	Rated Input Voltage	198-264 V/AC
Colour Temperature	3000/3500/4000 K	Power Supply Unit incl.	Yes
Length	1196 mm	Light Beam Angle	120 Degree
Width	61.1 mm	Control	DALI 2 / DT6
Height	58 mm	CRI (Ra)	90
Power Selectable	28 W, 32 W, 36 W, 40 W	IK Protection Class	IK03

Article	Housing Color		Luminous Flux	Price
707224	Black	WW NW	4800/5000/4900 lm	**€ 184.95**
707223	White	WW NW	4900/5100/5000 lm	**€ 184.95**

CC IP20 EL

NEW

CAN

- **customisable with extensive accessories**
- **customised lighting solution thanks to replaceable light source**
- **combinable with the extensive product family of the CAN series**

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	60 mm	Control	Dimmable via optional light source
Pendulum Length	1500 mm		
Max. Power	1x max. 7.5 W		

Article	Housing Color	Height	Price
707251	White	150 mm	**€ 69.95**
707252	Black	150 mm	**€ 69.95**
707255	White	350 mm	**€ 84.95**
707256	Black	350 mm	**€ 84.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

CAN

- **customised lighting solution thanks to replaceable light source**
- **can be combined with the product family of the CAN series**

Application Area
Home / Living, Reception / Communication, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	134 mm	Control	Dimmable via optional light source
Ø	60 mm		
Max. Power	1x max. 7.5 W	Swivelling Angle	90 Degree

Article	Housing Color	Price
707079	White	**€ 49.95**
707080	Silver	**€ 49.95**
707081	Black	**€ 49.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series	**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series	**€ 4.95**
931065	Acrylic attachment for Can	**€ 4.95**

page 46 page 88 page 90 page 92 page 204 page 222 page 223

CAN BASE MIX'N MATCH 1/3

- **customised lighting solution thanks to replaceable light source**
- **can be customised with cylinder housing in 6 different colours**
- **can be combined with the extensive product family of the CAN series**

Housing	Aluminium	Control	Dimmable via optional light source
Height	91 mm	Rotation Angle	350 Degree
Ø	76 mm	Swivelling Angle	90 Degree
Max. Power	1x max. 7.5 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
707246	White	**€ 41.95**
707247	Black	**€ 41.95**
707248	Silver	**€ 41.95**

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

2/3 NEW

CYLINDER HOUSING FOR CAN MIX'N MATCH 2/3

Housing	Aluminium	Ø	60 mm
Height	98 mm		

Article	Housing Color	Price
931053	White	**€ 7.95**
931054	Black	**€ 7.95**
931055	Bronze	**€ 18.95**
931056	Brass	**€ 18.95**
931057	Black gray	**€ 18.95**
931058	Rosé	**€ 18.95**

IP20

3/3

REFLECTOR RING CAN SERIES MIX'N MATCH 3/3

Housing	Plastic	Ø	57 mm
Height	28 mm		

Article	Housing Color	Price
930301	White	**€ 4.95**
930302	Black	**€ 4.95**
930303	Gold	**€ 4.95**
930366	Silver	**€ 4.95**

IP20

HORUS

If you're looking for a slim, powerful and flexible three-phase spotlight, look no further than the Horus. The slimline housing and matt surface finish combined with the powerful chip for all wattages make the Horus a true jack-of-all-trades.

HORUS

- **low glare value**
- **can be rotated and swivelled**

Application Area
Shop / Retail / Sales area, Office / conference, Office / conference

Housing	Plastic	Light Beam Angle	40 Degree
Surface	Matt	Swivelling Angle	350 Degree
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes		



707094

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Ø	Power	EEI	Price
707094	Black	WW 3000 K	625 lm	125 mm	60 mm	7.0 W	E	**€ 69.95**
707095	White	WW 3000 K	625 lm	125 mm	60 mm	7.0 W	E	**€ 69.95**
707098	Black	WW 3000 K	915 lm	140 mm	70 mm	10.0 W	E	**€ 79.95**
707099	White	WW 3000 K	915 lm	140 mm	70 mm	10.0 W	E	**€ 79.95**
707102	Black	WW 3000 K	1705 lm	185 mm	80 mm	20.0 W	F	**€ 89.95**
707103	White	WW 3000 K	1705 lm	185 mm	80 mm	20.0 W	F	**€ 89.95**
707106	Black	WW 3000 K	2525 lm	210 mm	90 mm	30.0 W	F	**€ 109.95**
707107	White	WW 3000 K	2525 lm	210 mm	90 mm	30.0 W	F	**€ 109.95**
707096	Black	NW 4000 K	635 lm	125 mm	60 mm	7.0 W	E	**€ 69.95**
707097	White	NW 4000 K	635 lm	125 mm	60 mm	7.0 W	E	**€ 69.95**
707100	Black	NW 4000 K	1030 lm	140 mm	70 mm	10.0 W	E	**€ 79.95**
707101	White	NW 4000 K	1030 lm	140 mm	70 mm	10.0 W	E	**€ 79.95**
707104	Black	NW 4000 K	1785 lm	185 mm	80 mm	20.0 W	F	**€ 89.95**
707105	White	NW 4000 K	1785 lm	185 mm	80 mm	20.0 W	F	**€ 89.95**
707108	Black	NW 4000 K	2605 lm	210 mm	90 mm	30.0 W	F	**€ 109.95**
707109	White	NW 4000 K	2605 lm	210 mm	90 mm	30.0 W	F	**€ 109.95**

UNI 2

- **„Glow" effect on reflector ring**
- **Can be rotated and swivelled**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	36 Degree
Height	167 mm	Swivelling Angle	90 Degree
Ø	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	17 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90


707044

Article	Housing Color		Luminous Flux	Price
707131	Black	WW	1080 lm	**€ 185.95**
707044	White	WW	1110 lm	**€ 185.95**

IP20 A↑G G

Accessories

930339	Reflector ring black for Uni II series		**€ 10.95**
930340	Reflector ring gold for Uni II series		**€ 10.95**
930341	Reflector ring chrome for Uni II series		**€ 10.95**
930335	Rear black cover for Uni II series		**€ 2.95**
930337	Black heat sink cover for Uni II series		**€ 7.95**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**

page 74

page 75

page 76

page 79

page 148

page 151

AARON

- **can be rotated and swivelled**
- **high luminous flux**

Application Area
Shop / Retail / Sales area, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium	Power	79 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Luminous Flux	7400 lm	Power Supply Unit incl.	Yes
Length	120 mm	Light Beam Angle	40 Degree
Width	182 mm	Swivelling Angle	90 Degree
Height	255 mm	CRI (Ra)	90
Ø	120 mm		



707090

Article	Housing Color	Colour Temperature	EEI	Price
707090	Black	WW 3000 K	E	**€ 499.95**
707092	White	WW 3000 K	E	**€ 499.95**
707091	Black	NW 4000 K	F	**€ 499.95**
707093	White	NW 4000 K	F	**€ 499.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

NIHAL

- **can be rotated and swivelled**
- **large tilt angle**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	135 mm	Light Beam Angle	33 Degree
Width	138 mm	Swivelling Angle	180 Degree
Height	188 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	86 mm		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90


707040

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Price
707056	Silver	WW 3000 K	2470 lm	33.0 W	**€ 229.95**
707041	Black	WW 3000 K	2580 lm	33.0 W	**€ 229.95**
707040	White	WW 3000 K	2880 lm	33.0 W	**€ 229.95**
707043	Black	NW 4000 K	2660 lm	33.0 W	**€ 229.95**
707057	Silver	NW 4000 K	2700 lm	35.0 W	**€ 229.95**
707042	White	NW 4000 K	3100 lm	34.0 W	**€ 229.95**

Accessories

930315	Reflector ring white for Nihal series		**€ 4.95**
930316	Reflector ring black for Nihal series		**€ 4.95**
930365	Reflector ring silver for Nihal series		**€ 4.95**
930317	Reflector ring gold for Nihal series		**€ 4.95**
930311	Side cover white for Nihal series		**€ 5.95**
930312	Side cover black for Nihal series		**€ 5.95**
930363	Side cover silver for Nihal series		**€ 5.55**
930313	Side cover gold for Nihal series		**€ 5.95**
930314	Side cover walnut wood look for Nihal series		**€ 7.95**
930769	Side cover natural oak wood look for Nihal series		**€ 7.95**
930318	15° reflector for Nihal series		**€ 17.95**
930320	50° reflector for Nihal series		**€ 17.95**
930321	Honeycomb filter for Nihal series		**€ 10.95**
930322	Spread lens for Nihal 37° series		**€ 10.95**
930323	Softening lens for Nihal 37° series		**€ 10.95**
930324	Linear spread lens for Nihal 40°/80° series		**€ 10.95**

NIHAL MINI

- **Can be rotated and swivelled**
- **Large tilt angle**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	94 mm	Light Beam Angle	35 Degree
Width	102 mm	Swivelling Angle	180 Degree
Height	139 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	60 mm	CRI (Ra)	90
Power	15 W		
Rated Input Voltage	220-240 V/AC		



707036

Article	Housing Color	Colour Temperature	Luminous Flux	Price
707037	Black	WW 3000 K	1080 lm	**€ 177.95**
707054	Silver	WW 3000 K	1100 lm	**€ 177.95**
707036	White	WW 3000 K	1240 lm	**€ 177.95**
707039	Black	NW 4000 K	1160 lm	**€ 177.95**
707055	Silver	NW 4000 K	1190 lm	**€ 177.95**
707038	White	NW 4000 K	1330 lm	**€ 177.95**

Accessories

930301	Reflector ring white for Klara/Nihal Mini/Rigel Mini/Can series		**€ 4.95**
930302	Reflector ring black for Klara/Nihal Mini/Rigel Mini/Can series		**€ 4.95**
930303	Reflector ring gold for Klara/Nihal Mini/Rigel Mini/Can series		**€ 4.95**
930297	Side cover white for Nihal Mini series		**€ 3.95**
930298	Side cover black for Nihal Mini series		**€ 3.95**
930364	Side cover silver for Nihal Mini series		**€ 3.95**
930299	Side cover gold for Nihal Mini series		**€ 3.95**
930300	Side cover walnut wood look for Nihal Mini series		**€ 5.95**
930768	Side cover natural oak wood look for Nihal Mini series		**€ 5.95**
930306	48° reflector for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930307	Honeycomb filter for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930308	Spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930309	Softening lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930310	Linear spread lens for Klara/Nihal Mini/Rigel Mini/Uni II series		**€ 8.95**
930366	Reflector ring silver for Klara/Nihal Mini/Rigel Mini/Can series		**€ 4.95**
930767	12° lens for Nihal Mini series		**€ 10.95**

RF-SMART EVENTUS RGB+CCT

The EVENTUS RGB+CCT swivelling and tilting track spotlight combines smart control with powerful LED technology. With a total output of up to 30 W, it offers dynamic light in 16 million colours and variable colour temperature. Thanks to 18 automatic programmes, dimmable brightness and colour saturation, atmospheric lighting scenes can be individually designed.

Can be controlled via 2.4 GHz RF remote control or via Zigbee 3.0-compatible systems such as Amazon Alexa, Google Assistant or Tuya [gateway required]. The integrated repeater function ensures reliable synchronisation of multiple components - ideal for smart lighting solutions in retail, exhibitions or modern living spaces.

RF-SMART EVENTUS RGB+CCT

- **rotatable and swivelling**
- **brightness and colour saturation dimmable**
- **RGB 3x 6W (max. 18W), CW/WW 2x 30W (max. 30W), max. total output 30W**
- **16 million colours and colour temperature adjustable**
- **18 automatic programmes pre-installed**
- **program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **opt. controllable with RF-smart radio remote controls [2.4Ghz, range approx. 30 m]**
- **controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]**

Housing	Plastic, Metal	Rated Input Voltage	100-240 V/AC
Surface	Powder-coated, Fine structure, Matt	Power Supply Unit incl.	Yes
		Light Beam Angle	36 Degree
Colour Temperature	2700-6000 K	Rotation Angle	350 Degree
Luminous Flux	1800 lm	Swivelling Angle	90 Degree
Length	205 mm	Control	RF-Smart, ZigBee 3.0
Width	246 mm	CRI (Ra)	90
Height	31 mm	Light Direction	Front
Power	30 W		

Article	Housing Color		Price
843530	White	RGB WW CW	**€ 199.95**
843531	Black	RGB WW CW	**€ 199.95**

IP20 5 CH

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+C-CT	**€ 49.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+C-CT	**€ 74.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/ RGB+CCT	**€ 109.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 38.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 59.95**

LUCEA

The LUCEA series includes pendant, ceiling and track luminaires and impresses with its timeless design and flexible customisation options.

lenses
Depending on the model, you can narrow or widen the beam angle of the LUCEA luminaires using the easily replaceable lenses.

reflector rings
With the reflector rings [available for all models in black, white and gold], you can set colourful accents depending on the surroundings and atmosphere.

door panels
With the optional barn door trim, you can limit the light emission of the LUCEA luminaires with particular precision using four individually adjustable wings.

LUCEA-VARIETY

surface-mounted lights
The LUCEA surface-mounted luminaires are available as pendant luminaires, as swivelling and tilting ceiling luminaires with a base and as fixed spotlights.

1-phase luminaires
The pendant luminaires with a particularly soft
textile cable and the spotlights for use on single-circuit track systems are primarily aimed at private users looking for a slim and versatile solution for the home.

3-phase luminaires
The LUCEA luminaires for 3-phase 230V track systems are available as ceiling and pendant
versions and, thanks to the CCT dip switch, are particularly suitable for commercial use in bars, restaurants or offices.

FLEXIBLE COLOUR TEMPERATURE

The colour temperature has a decisive influence on the lighting effect in the room. For this reason, the LUCEA series is available in different colour temperatures, depending on the model and intended use. With an Ra value >90, the LUCEA luminaires also guarantee true-to-life colour rendering of walls, ceilings and objects. Using the LUCEA ceiling light as an example, you can see in the illustrations below how the light colour and lighting mood change depending on the model version - from warm white to neutral white and as a flexible dim-to-warm version.

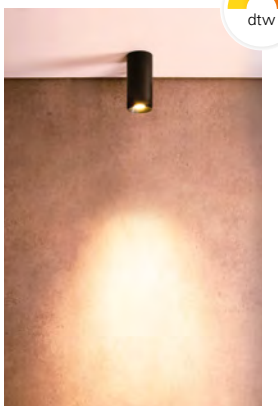

dim-to-warm
[1,800K - 2.700K]
In the dim-to-warm version, the colour temperature adjusts automatically when dimming [the lower the light intensity, the warmer the colour temperature].

2,700 K
For private users: the lights with extra warm white 2,700K.

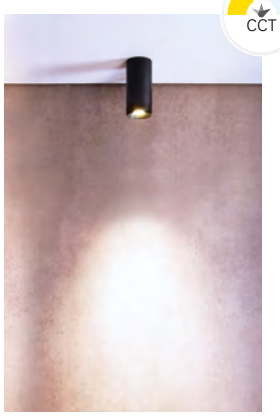

3,000 K
For commercial applications: The surface-mounted and 3-phase luminaires offer a CCT dip switch to switch between 3,000K [warm white] and 4,000K [neutral white].

4,000 K
In addition to the CCT versions, the 3-phase spotlights with 40W are also available as a pure 4,000K [neutral white] version.

FLEXIBLE BEAM ANGLE

Wide, soft light or a precise, focussed spot – with the LUCEA series you have the choice, even retrospectively. In addition to the standard beam angle of 36°, the luminaires can be narrowed or widened in all versions [surface-mounted, pendant, track] using optionally available lenses. You are even more flexible with the optional, colour-matching barndoor cover. With its four wings, the light emission can be adapted to different room and object geometries. The illustrations below show how the light emission of the LUCEA changes through the use of different lenses and the barndoor.

24°
narrow beam angle with optional 24° lens

36°
standard beam angle with 36° lens [standard]

60°
wide beam angle with optional 60° lens

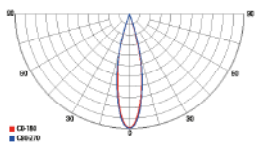

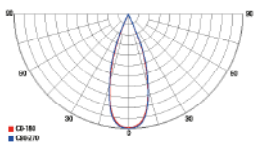

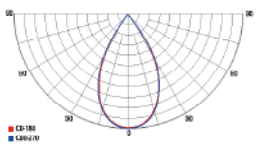

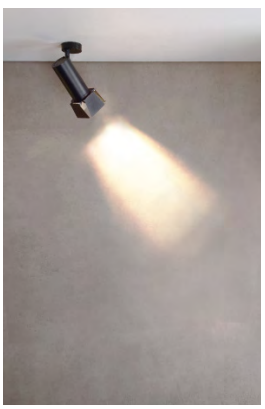

door panels
individual limitation of the beam angle with the wings of the barn door panel

LUCEA DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	EOFI	100 %
Colour Temperature	2700 K	Power Supply Unit incl.	Yes
Luminous Flux	1300 lm	Pendulum Length	1600 mm
Width	65 mm	Light Beam Angle	36 Degree
Height	184 mm	Control	DALI 2 / DT6, Push-Dim
Power	10 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03
Voltage range emergency lighting	176-280 V/DC		

Article	Housing Color		Price
707244	White	WW	**€ 149.95**
707245	Black	WW	**€ 149.95**

IP20 EL

Accessories

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

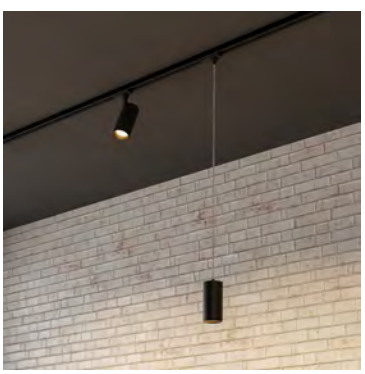

NEW CCT DALI Phase Ra>90 SDCM<3

LUCEA CCT DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **light colour adjustable in two stages**
- **incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Pendulum Length	1600 mm
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Rated Input Voltage	200-240 V/AC	Control	DALI 2 / DT6, Push-Dim
Voltage range emergency lighting	176-280 V/DC	CRI (Ra)	90
EOFI	100 %	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color		Luminous Flux	Width	Height	Power	Price
707234	White	WW NW	930/1000 lm	65 mm	184 mm	11.0 W	**€ 154.95**
707235	Black	WW NW	930/1000 lm	65 mm	184 mm	11.0 W	**€ 154.95**
707238	White	WW NW	1930/2000 lm	85 mm	186 mm	20.0 W	**€ 199.95**
707239	Black	WW NW	1930/2000 lm	85 mm	186 mm	20.0 W	**€ 199.95**

IP20 EL

Accessories for **707234**, **707235**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **707238**, **707239**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

LUCEA CCT

- **Light colour adjustable in two stages**
- **Incl. black reflector ring**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Pendulum Length	1800 mm	IK Protection Class	IK03



707124

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
707124	White	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 149.95**
707125	Black	WW NW	930/1000 lm	157 mm	65 mm	10.0 W	**€ 149.95**
707126	White	WW NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 177.95**
707127	Black	WW NW	1460/1500 lm	178 mm	85 mm	15.0 W	**€ 177.95**
707128	White	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 189.95**
707129	Black	WW NW	1930/2000 lm	178 mm	85 mm	20.0 W	**€ 189.95**

IP20

Accessories for **707124**, **707125**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **707126**, **707127**, **707128**, **707129**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

page 42

page 80

page 82

page 333

page 436

LUCEA DTW

- **high colour rendering**
- **Dim-to-warm 1,800K-2,700K**
- **incl. black reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	1800-2700 K	Pendulum Length	1800 mm
Luminous Flux	750 lm	Light Beam Angle	36 Degree
Height	157 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	65 mm		
Power	10 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03

Article	Housing Color		Price
707217	White	WW	**€ 135.95**
707218	Black	WW	**€ 135.95**

IP20

Accessories

930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

LUCEA DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **incl. black reflector ring**
- **can be customised with a wide range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Control	DALI 2 / DT6, Intelli Push-Dim
Rated Input Voltage	200-240 V/AC		
Power Supply Unit incl.	Yes	CRI (Ra)	90
Light Beam Angle	36 Degree	IK Protection Class	IK03

Article	Housing Color	Colour Temperature	Luminous Flux	Width	Height	Power	Price
707240	White	WW 2700 K	1950 lm	85 mm	269 mm	15.0 W	**€ 159.95**
707241	Black	WW 2700 K	1950 lm	85 mm	269 mm	15.0 W	**€ 159.95**
707242	White	NW 4000 K	4480 lm	100 mm	315 mm	40.0 W	**€ 214.95**
707243	Black	NW 4000 K	4480 lm	100 mm	315 mm	40.0 W	**€ 214.95**

IP20 EL

Accessories for **707240**, **707241**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930754	Door panel for Lucea 15/20 white	**€ 23.95**
930755	Door panel for Lucea 15/20 black	**€ 23.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

Accessories for **707242**, **707243**

930677	Door panel for Lucea 30/40 white	**€ 24.95**
930678	Door panel for Lucea 30/40 black	**€ 24.95**
930682	Lens 24° for Lucea 30	**€ 15.95**
930684	Lens 60° for Lucea 30	**€ 15.95**
930762	Reflector ring for Lucea 30/40 white	**€ 6.95**
930763	Reflector ring for Lucea 30/40 black	**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold	**€ 6.95**

LUCEA CCT DALI

- **emergency current capable [176-280V/DC EOFI: 100%]**
- **light colour adjustable in 2 shades**
- **incl. black reflector ring**
- **can be customised with a wide range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000/4000 K	Light Beam Angle	36 Degree
Luminous Flux	2700/2900 lm	Control	DALI 2 / DT6, Intelli Push-Dim
Width	100 mm	CRI (Ra)	90
Height	302 mm	IK Protection Class	IK03
Power	33 W		
Rated Input Voltage	200-240 V/AC		

Article	Housing Color		Price
707232	White	WW NW	**€ 214.95**
707233	Black	WW NW	**€ 214.95**

IP20 EL

Accessories

930677	Door panel for Lucea 30/40 white	**€ 24.95**
930678	Door panel for Lucea 30/40 black	**€ 24.95**
930682	Lens 24° for Lucea 30	**€ 15.95**
930684	Lens 60° for Lucea 30	**€ 15.95**
930762	Reflector ring for Lucea 30/40 white	**€ 6.95**
930763	Reflector ring for Lucea 30/40 black	**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold	**€ 6.95**

LUCEA CCT

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**
- **Light colour adjustable in two stages**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Swivelling Angle	90 Degree
Colour Temperature	3000/4000 K	Control	Leading-edge dimmer, Trailing-edge dimmer
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK03
Light Beam Angle	36 Degree		
Rotation Angle	350 Degree		



707116

Article	Housing Color		Luminous Flux	Height	Ø	Power	Price
707116	White	WW NW	930/1000 lm	249 mm	65 mm	10.0 W	**€ 139.95**
707117	Black	WW NW	930/1000 lm	249 mm	65 mm	10.0 W	**€ 139.95**
707118	White	WW NW	1460/1500 lm	269 mm	85 mm	15.0 W	**€ 159.95**
707119	Black	WW NW	1460/1500 lm	269 mm	85 mm	15.0 W	**€ 159.95**
707120	White	WW NW	1930/2000 lm	269 mm	85 mm	20.0 W	**€ 179.95**
707121	Black	WW NW	1930/2000 lm	269 mm	85 mm	20.0 W	**€ 179.95**
707122	White	WW NW	2700/2900 lm	302 mm	100 mm	30.0 W	**€ 199.95**
707123	Black	WW NW	2700/2900 lm	302 mm	100 mm	30.0 W	**€ 199.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

Accessories for **707116**, **707117**

930679	Lens 24° for Lucea 6/10	**€ 9.95**
930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

Accessories for **707118**, **707119**, **707120**, **707121**

930680	Lens 24° for Lucea 15/20	**€ 12.95**
930681	Lens 60° for Lucea 15/20	**€ 12.95**
930754	Door panel for Lucea 15/20 white	**€ 23.95**
930755	Door panel for Lucea 15/20 black	**€ 23.95**
930759	Reflector ring for Lucea 15/20 white	**€ 5.95**
930760	Reflector ring for Lucea 15/20 black	**€ 5.95**
930761	Reflector ring for Lucea 15/20 gold	**€ 5.95**

Accessories for **707122**, **707123**

930677	Door panel for Lucea 30/40 white	**€ 24.95**
930678	Door panel for Lucea 30/40 black	**€ 24.95**
930682	Lens 24° for Lucea 30	**€ 15.95**
930684	Lens 60° for Lucea 30	**€ 15.95**
930762	Reflector ring for Lucea 30/40 white	**€ 6.95**
930763	Reflector ring for Lucea 30/40 black	**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold	**€ 6.95**

page 42

page 80

page 82

page 332

page 432

LUCEA

- **Incl. black reflector ring**
- **Can be customised with a comprehensive range of accessories**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Trade fair construction / shop fitting

Housing	Aluminium	Light Beam Angle	36 Degree
Colour Temperature	4000 K	Rotation Angle	350 Degree
Luminous Flux	4480 lm	Swivelling Angle	90 Degree
Height	211 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Ø	100 mm		
Power	40 W	CRI (Ra)	90
Rated Input Voltage	200-240 V/AC	IK Protection Class	IK03
Power Supply Unit incl.	Yes		

Article	Housing Color		Price
707183	White	NW	**€ 199.95**
707184	Black	NW	**€ 199.95**

IP20

Accessories

930682	Lens 24° for Lucea 30		**€ 15.95**
930684	Lens 60° for Lucea 30		**€ 15.95**
930677	Door panel for Lucea 30/40 white		**€ 24.95**
930678	Door panel for Lucea 30/40 black		**€ 24.95**
930762	Reflector ring for Lucea 30/40 white		**€ 6.95**
930763	Reflector ring for Lucea 30/40 black		**€ 6.95**
930764	Reflector ring for Lucea 30/40 gold		**€ 6.95**

LUCEA DTW

- **Dim-to-warm 1,800K - 2,700K**
- **incl. black reflector ring**
- **Can be customised with a wide range of accessories**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium
Colour Temperature	1800-2700 K
Luminous Flux	750 lm
Height	249 mm
Ø	65 mm
Power	10 W
Rated Input Voltage	200-240 V/AC

Power Supply Unit incl.	Yes
Light Beam Angle	36 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	90
IK Protection Class	IK03

Article	Housing Color		Price
707213	White	WW	**€ 109.95**
707214	Black	WW	**€ 109.95**

IP20

Accessories

930752	Door panel for Lucea 6/10 white	**€ 22.95**
930753	Door panel for Lucea 6/10 black	**€ 22.95**
930756	Reflector ring for Lucea 6/10 white	**€ 4.95**
930757	Reflector ring for Lucea 6/10 black	**€ 4.95**
930758	Reflector ring for Lucea 6/10 gold	**€ 4.95**

page 42

page 80

page 82

page 432

SLIM

- **Extra-soft fabric cable**
- **Glare-free due to low UGR value [<19]**
- **Suspended mounting up to 1,800 mm**
- **Slim design at just 39 mm in diameter**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC	
Colour Temperature	2700 K	Power Supply Unit incl.	Yes	
Luminous Flux	500 lm	Pendulum Length	1500 mm	
Length	1800 mm	Light Beam Angle	24 Degree	
Height	300 mm	Control	Leading-edge dimmer, Trailing-edge dimmer	
Ø	39 mm			
Power	5 W	CRI (Ra)	90	



707162

Article	Housing Color		Price
707161	Black	WW	**€ 93.95**
707162	White	WW	**€ 93.95**

IP20

Accessories

930748	36° lens for Slim series	**€ 4.95**
930749	60° lens for Slim series	**€ 4.95**
930744	Reflector ring white for Slim series	**€ 4.95**
930745	Reflector ring black for Slim series	**€ 4.95**
930746	Reflector ring gold-coloured for Slim series	**€ 5.95**



page 39

page 40

page 331

SLIM

- **glare-free, thanks to low UGR value [<19]**
- **slim design with a diameter of only 39 mm**
- **incl. silver-coloured reflector ring**

Application Area
Home / Living, Reception / Communication, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	2700 K	Light Beam Angle	36 Degree
Luminous Flux	500 lm	Rotation Angle	330 Degree
Length	213 mm	Swivelling Angle	60 Degree
Ø	39 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Power	5 W		
Rated Input Voltage	220-240 V/AC	CRI (Ra)	90



707203

Article	Housing Color		Price
707203	White	WW	**€ 82.95**
707204	Black	WW	**€ 82.95**

IP20

Accessories

930744	Reflector ring white for Slim series		**€ 4.95**
930745	Reflector ring black for Slim series		**€ 4.95**
930746	Reflector ring gold-coloured for Slim series		**€ 5.95**
930748	36° lens for Slim series		**€ 4.95**
930749	60° lens for Slim series		**€ 4.95**

Phase

STUDIO PAR 30

- **replaceable lamp (E27)**
- **can be rotated and swivelled**
- **integrated mesh chip guard**
- **incl. adapter**

Application Area
Home / Living, Trade fair construction / shop fitting, Theatre / event

Housing	Aluminium	Max. Power	1x max. 42 W
Length	158.8 mm	Rated Input Voltage	220-240 V/AC
Width	158.8 mm	Control	Dimmable via optional light source
Height	270.8 mm		

Article	Housing Color	Price
707082	Black	**€ 72.95**
707083	Silver	**€ 72.95**

E27 | IP20

Accessories

001623	Door panel	**€ 29.95**
001621	Door panel	**€ 29.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

B
CKS

BATTERY AND SOLAR LIGHTS

448 battery lights

456 solar lights

battery and solar lights

page 448

page 450

page 454

page 454

page 455

page 455

page 456

page 457

page 458

page 459

CANIS BUNDLE

Discover our portable cordless LED lamps from the CANIS series. With a 3.5 W output and 270 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to six lamps at the same time with the optional charging dock, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base



CANIS BUNDLE

- **Pleasant and wide light distribution**
- **More than eight hours of light after charging**
- **Infinitely dimmable via touch sensor**
- **Light colour adjustable in two stages**
- **Charge up to six cordless lamps using the stackable charging dock [optional]**
- **Includes USB charging base**

Application Area
Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	112 mm
Surface	Matt	Power	3.5 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	270 lm	Light Beam Angle	100 Degree
Height	370 mm	CRI (Ra)	80

Article	Housing Color		Price
620194	Sand	WW	**€ 109.95**
620195	Medium gray	WW	**€ 109.95**
620196	Terracotta	WW	**€ 109.95**
620197	Blue	WW	**€ 109.95**
620198	Rust	WW	**€ 109.95**
620199	White	WW	**€ 109.95**
620200	Black	WW	**€ 109.95**
620201	Dark grey	WW	**€ 109.95**

IP65

Accessories

930716	6-way charging station incl. power supply for Canis light		**€ 199.95**
930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black		**€ 8.95**

CANIS MINI BUNDLE

Discover our portable cordless LED lamps from the CANIS series. With a 2.3 W output and 110 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to 15 lamps at the same time with the optional charging station, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base

CANIS MINI BUNDLE

- **Pleasant and wide light distribution**
- **More than eight hours of light after charging**
- **Infinitely dimmable using touch sensor**
- **Light colour adjustable in two stages**
- **Charge up to 15 cordless lamps using the stackable charging dock [optional]**
- **Includes USB charging base**

Application Area
Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	76 mm
Surface	Matt	Power	2.3 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	110 lm	CRI (Ra)	80
Height	208 mm		

Article	Housing Color		Price
620202	Sand	WW	**€ 99.95**
620203	Medium gray	WW	**€ 99.95**
620204	Terracotta	WW	**€ 99.95**
620205	Blue	WW	**€ 99.95**
620206	Rust	WW	**€ 99.95**
620207	White	WW	**€ 99.95**
620208	Black	WW	**€ 99.95**
620209	Dark grey	WW	**€ 99.95**

IP65

Accessories

930734	15-way charging station incl. power supply unit for Canis Mini light	**€ 299.95**
930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black	**€ 8.95**

MIRAM

Combine & shine – with the MIRAM series, there are no more limits to your creativity. Simply combine the luminaire head in your favourite colour with a stand, a wall bracket or a pendant fixture of your choice. In this way, you can create your very own individual luminaire in the twinkling of an eye and recombine it at any time without tools. Flexible, simple, chic - that is MIRAM combine & shine.

it's that simple:

- choose a luminaire head in your favourite colour
- select the desired fastening in your favourite colour

your advantages::

- USB-C cable included
- 147 possible combinations

346025 **346033** **346032** **346034** **346035** **346036** **346037**

930625 **930627** **930626** **930628** **930629** **930630** **930631**

930618 **930620** **930619** **930621** **930622** **930623** **930624**

930611 **930613** **930612** **930614** **930615** **930616** **930617**

IP54

MIRAM

Application Area
Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living

Housing	Aluminium	Power	2.2 W
Colour Temperature	3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	196 lm	Power Supply Unit incl.	No
Height	30 mm	Light Beam Angle	47 Degree
Ø	120 mm	CRI (Ra)	80

Article	Housing Color		Price
346025	White	ww	**€ 99.95**
346032	Black	ww	**€ 99.95**
346033	Light gray	ww	**€ 99.95**
346034	Red	ww	**€ 99.95**
346035	Yellow	ww	**€ 99.95**
346036	Blue	ww	**€ 99.95**
346037	Light gray	ww	**€ 99.95**

CV | IP54 | III

STAND FOR MAGNETIC LIGHT MIRAM

Housing	Aluminium	Ø	102 mm
Height	270 mm		

Article	Housing Color	Price
930611	White	**€ 34.95**
930612	Black	**€ 34.95**
930613	Grey	**€ 34.95**
930614	Red	**€ 34.95**
930615	Yellow	**€ 34.95**
930616	Blue	**€ 34.95**
930617	Green	**€ 34.95**

WALL BRACKET, MIRAM SERIES

Housing	Aluminium	Height	96 mm
Width	85 mm	Base Ø	60 mm

Article	Housing Color	Price
930618	White	**€ 19.95**
930619	Black	**€ 19.95**
930620	Grey	**€ 19.95**
930621	Red	**€ 19.95**
930622	Yellow	**€ 19.95**
930623	Blue	**€ 19.95**
930624	Green	**€ 19.95**

PENDANT, MIRAM SERIES

Housing	Aluminium	Height	185 mm
Width	205 mm	Pendulum Length	2190 mm

Article	Housing Color	Price
930625	White	**€ 34.95**
930626	Black	**€ 34.95**
930627	Grey	**€ 34.95**
930628	Red	**€ 34.95**
930629	Yellow	**€ 34.95**
930630	Blue	**€ 34.95**
930631	Green	**€ 34.95**

SAMAS SOLAR

Need lighting but don't have an available power supply? We have the solution. The SAMAS SOLAR series only needs sunlight - and not even consistent sunlight. Thanks to its clever energy-saving mode, in which it emits just 15 % light output in standby mode, it lasts an impressively long time. When the built-in sensor detects movement, it switches to full light output. The lighting can also be switched off using a button. The powerful light output combined with state-of-the-art technology for long runtimes makes it the perfect solution for walls, tables and gardens.

IP54

SAMAS SOLAR

- **Motion/twilight sensor**
- **Highly efficient solar panel**
- **Includes 3.70 V and 2,200 mAh Li-ion rechargeable battery**
- **Incl. ground spike**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Aluminium	Rated Input Voltage	3.7 V/DC
Colour Temperature	3000 K	Power Supply Unit incl.	No
Length	140 mm	Light Beam Angle	98 Degree
Width	140 mm	CRI (Ra)	80
Power	2.2 W	Motion Detector	Yes

Article	Housing Color		Luminous Flux	Height	Price
733050	Dark grey	WW	135 lm	500 mm	**€ 149.95**
733049	Dark grey	WW	170 lm	340 mm	**€ 139.95**

CV | IP54 | III

IP54

SAMAS SOLAR

- **Motion/twilight sensor**
- **Highly efficient solar panel**
- **Includes 3.70 V and 2,200 mAh Li-ion rechargeable battery**

Application Area
Garden / Terrace / Balcony / Walkways, House wall / facade / front door

Housing	Aluminium	Power	2.2 W
Colour Temperature	3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	130 lm	Power Supply Unit incl.	No
Length	154 mm	Light Beam Angle	106 Degree
Width	140 mm	CRI (Ra)	80
Height	290 mm	Motion Detector	Yes

Article	Housing Color		Price
731122	Dark grey	WW	**€ 139.95**

CV | IP54 | III

STANDING LIGHT SOLAR PREMIUM

The SOLAR PREMIUM series features an impressive futuristic design and provides both innovative and decorative lighting outdoors and in gardens. Power is supplied by a built-in rechargeable battery with solar panel, eliminating the need for unsightly or expensive cable installations.

IP54

STANDING LIGHT SOLAR PREMIUM

- **Motion/twilight sensor**
- **highly efficient solar panel**
- **includes 3.70 V and 2,200 mAh Li-ion rechargeable battery**
- **tilting lamp head**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Aluminium	Power	1.6 W
Colour Temperature	3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	170 lm	Power Supply Unit incl.	No
Length	200 mm	Light Beam Angle	110 Degree
Width	151 mm	Swivelling Angle	180 Degree
Height	1000 mm	CRI (Ra)	80

Article	Housing Color		Price
733046	Dark grey	WW	**€ 219.95**

IP54

SOLAR PREMIUM

- **Motion/twilight sensor**
- **Highly efficient solar panel**
- **Includes 3.70 V and 2,200 mAh Li-ion rechargeable battery**
- **Tilting lamp head**

Application Area
Garden / Terrace / Balcony / Walkways, House wall / facade / front door

Housing	Aluminium	Power	1.6 W
Colour Temperature	3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	170 lm	Power Supply Unit incl.	No
Length	160.5 mm	Light Beam Angle	110 Degree
Width	233.2 mm	Swivelling Angle	180 Degree
Height	152 mm	CRI (Ra)	80



731116

Article	Housing Color		Price
731116	Dark grey	WW	**€ 149.95**



OUTDOOR LIGHTS

464 bollard lights
484 surface mounted wall lights
522 ceiling and wall lights
526 built in wall lights
532 spherical lamps
536 energy distributor
546 surface mounted / ground spike lights
556 wall washer
560 ground recessed lights
580 floodlight
586 display lights

bollard lights

page 464

page 465

page 466

page 468

page 470

page 472

page 474

page 476

page 478

page 480

IP44

ESTADA

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Stainless steel	Rated Input Voltage	220-240 V/AC
Height	1000 mm	Control	Dimmable via optional light source
Ø	100 mm		
Max. Power	1x max. 11 W		

Article	Housing Color	Price
730009	Silver	**€ 119.95**

E27 IP44

NOVA

- **E27 socket suitable for A19 LED lamps**
- **with motion/twilight sensor [art. no. 730032 only]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living

Housing	Stainless steel	Max. Power	1x max. 40 W
Height	1100 mm	Rated Input Voltage	220-240 V/AC
Ø	75 mm	Colour of Light Output	White

Article	Housing Color	Dimmable	Control	Motion Detector	Type of Motion Detector	Price
730032	Silver			Yes	Infrared	**€ 99.95**
730007	Silver	Yes	Dimmable via optional light source	No		**€ 79.95**



page 498

FACADO 2 SQUARE

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides even better illumination. The FACADO light is made from high-quality die-cast aluminium and available in dark grey or rust and in square or rounded designs.
The IP67 connection box features a double M20 cable gland suitable for buried cables in sizes 3 × 1.5 mm^2, 5 × 1.5 mm^2 or 3 × 2.5 mm^2, and more.

page 500

FACADO 2 SQUARE

- **IP65 weather resistance**
- **IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²**
- **Newly designed lamp head for improved illumination**
- **Available with an opal diffuser or a transparent diffuser with smoked glass**
- **Ideal for e.g. ST64 bulbs and A60/70 bulbs**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Length	108 mm	Control	Dimmable via optional light source
Width	108 mm		

Article	Housing Color	Height	Colour of Light Output	Price
730496	Dark grey	650 mm	Smoke-coloured	**€ 149.95**
730495	Dark grey	650 mm	White	**€ 149.95**
730497	Dark grey	1000 mm	Smoke-coloured	**€ 199.95**
730498	Dark grey	1000 mm	White	**€ 199.95**

E27 IP65

Accessories

180359	MAS VLE E27 ST64 4 W 1,800 K gold-coloured		**€ 39.95**
180361	CLA150 E27 DIM 18 W 3,300 K, matt		**€ 27.95**

FACADO 2 ROUND

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides significantly improved illumination. The FACADO light is made of high-quality, die-cast aluminium and is available in dark grey or rust and in square or round designs.
The IP67 connection box features a double M20 cable gland suitable for e.g. buried cables in sizes 3x1.5 mm², 5x1.5 mm² or 3x2.5 mm².

page 501

FACADO 2 ROUND

- **IP65 weather resistance**
- **IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²**
- **Newly designed lamp head for improved illumination**
- **Available with an opal diffuser or a transparent diffuser with smoked glass**
- **Ideal for e.g. ST64 bulbs and A60/70 bulbs**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
		Rated Input Voltage	220-240 V/AC
Surface	Matt	Control	Dimmable via optional light source
Ø	108 mm		

Article	Housing Color	Height	Colour of Light Output	Price
730499	Dark grey	650 mm	Smoke-coloured	**€ 149.95**
730501	Rust	650 mm	Smoke-coloured	**€ 149.95**
730500	Dark grey	650 mm	White	**€ 149.95**
730502	Rust	650 mm	White	**€ 149.95**
730503	Dark grey	1000 mm	Smoke-coloured	**€ 199.95**
730505	Rust	1000 mm	Smoke-coloured	**€ 199.95**
730504	Dark grey	1000 mm	White	**€ 199.95**
730506	Rust	1000 mm	White	**€ 199.95**

Accessories

180359	MAS VLE E27 ST64 4 W 1,800 K gold-coloured		**€ 39.95**
180361	CLA150 E27 DIM 18 W 3,300 K, matt		**€ 27.95**

FARO

The solid FARO bollard lights made from die-cast aluminium are available in the sizes 25, 60 and 100 cm. Their design [more than 97 % of light directed downwards] and lens optics allow glare-free light distribution and a particularly large light beam of up to 10 metres in diameter. All variants are also DALI2 DT6 compatible. The FARO models can be equipped with an optional screening shade to illuminate surfaces on one side only. The IP68 connection box with possible feed-through wiring and the dirt-repellent powder coating in DB703 make the FARO bollard lights a long-lasting and high-quality choice for your outdoor lighting.

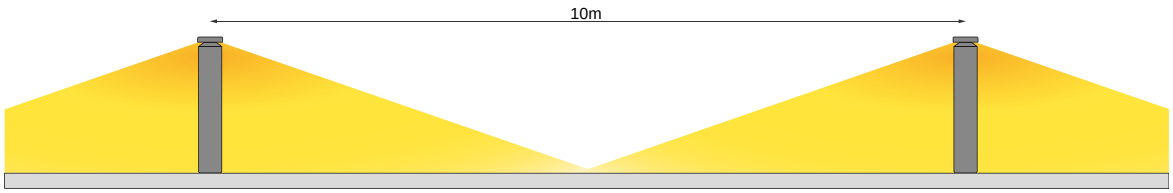

FARO

- **Glare-free, light directed downwards (>97 %)**
- **Lens optics for wide homogeneous illumination with up to 4/7/10 m diameter**
- **Optional screening shade for darkening on one side**
- **IP68 connection box with feed-through wiring**
- **Particularly high-quality and solid construction**
- **Dirt-repellent powder coating in DB703**
- **Emergency power capable (180-264 V/DC EOFI: 100 %)**

Application Area
Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	360 Degree
Luminous Flux	1030 lm	Light Beam Angle 2	180 Degree
Ø	180 mm	Control	DALI 2 / DT6
Power	24 W	CRI (Ra)	80
Rated Input Voltage	180-264 V/AC	IK Protection Class	IK10



730492

Article	Housing Color		Height	Price
730492	Dark grey	WW	250 mm	**€ 439.95**
730493	Dark grey	WW	600 mm	**€ 509.95**
730494	Dark grey	WW	1000 mm	**€ 589.95**

Accessories

930731	Concrete anchor for Faro series		**€ 24.95**
930776	Screening shade 180 degrees for Faro series		**€ 9.95**

LERNA

LERNA series bollard lights offer a number of advantages. The ability to adjust the light colour in 2 stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a power rating of 7.4 W and up to 256 lm, the light itself is incredibly bright.

page 542

LERNA

- **Light colour adjustable in two stages**
- **Light directed fully downwards to prevent light pollution**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06

Article	Housing Color		Height	Price
733073	Dark grey	WW NW	600 mm	**€ 209.95**
733072	Dark grey	WW NW	1000 mm	**€ 259.95**

CC IP65

CATA

The CATA series impresses not only as a modern path light, but also as a standalone lighting and design feature when creating outdoor spaces. The LEDs not only ensure full-surface illumination of paths and entrance areas but also inevitably draw attention to the striking frame construction. Available in three sizes, the CATA IV models can also be combined really well.

IP54

CATA

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	20 mm
Colour Temperature	3000 K	Power	4 W
Luminous Flux	170 lm	Rated Input Voltage	100-240 V/AC
Length	151 mm	Power Supply Unit incl.	Yes
Width	61 mm	Light Beam Angle	120 Degree
Base Length	145 mm	Primary Connection End	Connection box IP65
Base Width	55 mm	CRI (Ra)	80



733040

Article	Housing Color		Height	Price
733040	Dark grey	WW	500 mm	**€ 199.95**
733041	Dark grey	WW	700 mm	**€ 219.95**
733042	Dark grey	WW	1000 mm	**€ 239.95**

IP54 A↑G F

CHERTAN

With its extraordinary mix of materials consisting of die-cast aluminium housing and base made of weather-resistant, fibreglass-reinforced concrete, the CHERTAN outdoor standing light certainly stands apart from other models just on looks alone. With its pleasantly warm white light and light emission angle of 120°, the outdoor light is perfectly suited for decorative use in entrance areas, on paths or in the garden.

Note: As concrete is a natural product, every surface is unique and forms a distinct patina over time, depending on local conditions. It is therefore normal in wet conditions for a blotchy surface to form that disappears again when dried, yet produces an individual patina over the long-term.

CHERTAN

· Fibreglass-reinforced and weather-resistant concrete base

Application Area
Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Aluminium	Power	13 W
Colour Temperature	3000 K	Rated Input Voltage	100-277 V/AC
Length	170 mm	Power Supply Unit incl.	Yes
Width	72 mm	Light Beam Angle	120 Degree
Base Length	160 mm	Primary Connection End	Connection box IP54
Base Width	30 mm	CRI (Ra)	90
Base Height	40 mm		

Article	Housing Color		Luminous Flux	Height	Price
733043	Dark grey	WW	480 lm	450 mm	**€ 199.95**
733044	Dark grey	WW	530 lm	600 mm	**€ 219.95**
733045	Dark grey	WW	640 lm	1000 mm	**€ 239.95**

IP54 A↑G G

ORTIS

The Ortis LED bollard light cuts an excellent figure anywhere with its dark grey aluminium housing and, thanks to its IP54 certification, is suitable for flexible outdoor use in gardens, entrances and as path lighting. In addition, the Ortis has an internal slatted insert in the lamp head, which ensures a pleasant dimmed light that is directed downwards (warm white, 3,000 K).

page 499

IK05 IP54

ORTIS

·Light directed downwards, dimmed by the slatted insert

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	510 lm	Light Beam Angle	360 Degree
Height	1000 mm	Primary Connection End	Connection box
Ø	120 mm	CRI (Ra)	80
Power	15.9 W	IK Protection Class	IK05

Article	Housing Color		Price
733004	Dark grey	WW	**€ 219.95**

IP54 A↑G G

TUCANAE

With its slim, unfussy housing design, the TUCANAE is a modern outdoor light that can be integrated almost anywhere. The 100-cm-high bollard light emits its warm white light diagonally downwards onto paths and other surfaces and, in the MOTION variant, has an integrated twilight switch with adjustable brightness threshold and operating time.

page 502

TUCANAE

- **Powerful and energy saving**
- **Uniform illumination**
- **Adjustable brightness threshold and operating time [733068]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	10 mm
Colour Temperature	3000 K	Power	18 W
Luminous Flux	1650 lm	Rated Input Voltage	110-240 V/AC
Length	206 mm	Power Supply Unit incl.	Yes
Width	180 mm	Light Beam Angle	110 Degree
Height	1000 mm	Primary Connection End	Connection box
Base Length	120 mm	CRI (Ra)	80
Base Width	180 mm		



733068

Article	Housing Color		IP Protection Type	Motion Detector	Type of Motion Detector	Price
733068	Dark grey	WW	IP 54	Yes	Infrared	**€ 293.95**
733069	Dark grey	WW	IP 65	No		**€ 259.95**



surface mounted wall lights

page 484

page 485

page 486

page 487

page 488

page 489

page 490

page 491

page 492

page 493

page 494

page 495

page 496

page 497

page 498

page 499

page 500

page 501

page 502

page 503

page 505

page 505

page 506

page 507

page 508

page 510

page 512

page 513

page 514

page 515

page 516

page 517

page 518

SHORELINE PRO ROUND

- **continuous wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Height	140 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm		
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm	Colour of Light Output	Clear

Article	Housing Color	Price
731211	Light grey	**€ 89.95**
731212	Dark grey	**€ 89.95**
731213	White	**€ 89.95**

GU10 | IP65

Accessories

930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**
180275	PAR16, GU10, 230 V/AC, 2,700 K, 36 degrees	**€ 6.95**
180209	MASTER VALUE LEDspot VLE, GU10, 230 V/AC, DIM, 2,700 K, 36 degrees	**€ 13.95**
180208	MASTER VALUE LEDspot VLE, GU10, 230 V/AC, DIM, 2,700 K, 36 degrees	**€ 14.95**
180049	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 2,700 K, 60 degrees	**€ 14.95**
180099	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 3,000 K, 36 degrees	**€ 14.95**
180050	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 3,000 K, 60 degrees	**€ 14.95**
180053	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 4,000 K, 36 degrees	**€ 14.95**
180051	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 4,000 K, 60 degrees	**€ 14.95**
180139	MASTER LEDspot Value, GU10, 230 V/AC, DIM, 3,000 K, 36 degrees	**€ 20.95**
180149	MASTER LEDspot Value, GU10, 230 V/AC, DIM, 4,000 K, 36 degrees	**€ 20.95**
180285	PAR16, GU10, 230 V/AC, DIM, 2,700 K, 60 degrees	**€ 14.95**

SHORELINE PRO ROUND UP+DOWN

- **continuous wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Max. Power	2x max. 7.5 W
Height	158 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm		
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm	Colour of Light Output	Clear

Article	Housing Color	Price
731214	Light grey	**€ 99.95**
731215	Dark grey	**€ 99.95**
731216	White	**€ 99.95**

GU10 | IP65

Accessories

930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**
180275	PAR16, GU10, 230 V/AC, 2,700 K, 36 degrees	**€ 6.95**
180209	MASTER VALUE LEDspot VLE, GU10, 230 V/AC, DIM, 2,700 K, 36 degrees	**€ 13.95**
180208	MASTER VALUE LEDspot VLE, GU10, 230 V/AC, DIM, 2,700 K, 36 degrees	**€ 14.95**
180049	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 2,700 K, 60 degrees	**€ 14.95**
180099	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 3,000 K, 36 degrees	**€ 14.95**
180050	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 3,000 K, 60 degrees	**€ 14.95**
180053	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 4,000 K, 36 degrees	**€ 14.95**
180051	MASTER VALUE LEDspot MV, GU10, 230 V/AC, DIM, 4,000 K, 60 degrees	**€ 14.95**
180139	MASTER LEDspot Value, GU10, 230 V/AC, DIM, 3,000 K, 36 degrees	**€ 20.95**
180149	MASTER LEDspot Value, GU10, 230 V/AC, DIM, 4,000 K, 36 degrees	**€ 20.95**
180285	PAR16, GU10, 230 V/AC, DIM, 2,700 K, 60 degrees	**€ 14.95**

SHORELINE PRO SQUARE 70

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	6 W
Luminous Flux	480/550 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	150 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08

Article	Housing Color		Price
731205	Light grey	WW NW	**€ 179.95**
731206	Dark grey	WW NW	**€ 179.95**
731207	White	WW NW	**€ 179.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 7.95**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 7.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO SQUARE 100

- **Light colour adjustable in 2 stages**
- **through-wiring possible**
- **Seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	12 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	900/1000 lm	Power Supply Unit incl.	Yes
Length	100 mm	Light Beam Angle	36 Degree
Width	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	163 mm		
Base Length	40 mm	CRI (Ra)	90
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Price
731202	Light grey	WW NW	**€ 189.95**
731203	Dark grey	WW NW	**€ 189.95**
731204	White	WW NW	**€ 189.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 14.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 14.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO SQUARE 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Length	140 mm	Light Beam Angle	36 Degree
Width	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	218 mm		
Base Length	44.5 mm	CRI (Ra)	90
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Luminous Flux	Power	Price
731181	Light grey	WW NW	2000/2300 lm	20.5 W	**€ 269.95**
731182	Dark grey	WW NW	2000/2300 lm	20.5 W	**€ 269.95**
731183	White	WW NW	2000/2300 lm	20.5 W	**€ 269.95**
731184	Light grey	WW NW	3100/3400 lm	33.0 W	**€ 299.95**
731185	Dark grey	WW NW	3100/3400 lm	33.0 W	**€ 299.95**
731186	White	WW NW	3100/3400 lm	33.0 W	**€ 299.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 12.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 12.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 17.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 17.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 17.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND 68

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	6 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	480/550 lm	Power Supply Unit incl.	Yes
Height	150 mm	Light Beam Angle	30 Degree
Ø	68 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Price
731217	Light grey	WW NW	**€ 169.95**
731218	Dark grey	WW NW	**€ 169.95**
731219	White	WW NW	**€ 169.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 7.95**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 7.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater-resistant**
- **easy and quick installation**
- **separable mounting plate with plug-in connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	12 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	900/1000 lm	Power Supply Unit incl.	Yes
Height	163 mm	Light Beam Angle	36 Degree
Ø	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Price
731196	Light grey	WW NW	**€ 189.95**
731197	Dark grey	WW NW	**€ 189.95**
731198	White	WW NW	**€ 189.95**

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 14.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 14.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	218 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm		
Base Width	80 mm	CRI (Ra)	92
Base Height	130 mm	IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Power	Price
731169	Light grey	WW NW	2000/2200 lm	20.0 W	**€ 259.95**
731170	Dark grey	WW NW	2000/2200 lm	20.0 W	**€ 259.95**
731171	White	WW NW	2000/2200 lm	20.0 W	**€ 259.95**
731172	Light grey	WW NW	3100/3400 lm	33.0 W	**€ 299.95**
731173	Dark grey	WW NW	3100/3400 lm	33.0 W	**€ 299.95**
731174	White	WW NW	3100/3400 lm	33.0 W	**€ 299.95**

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 12.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 12.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 17.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 17.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 17.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO SQUARE UP+DOWN 70

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	7.5 W
Luminous Flux	700/780 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	186 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08

Article	Housing Color		Price
731208	Light grey	WW NW	**€ 209.95**
731209	Dark grey	WW NW	**€ 209.95**
731210	White	WW NW	**€ 209.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 7.95**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 7.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO SQUARE UP+DOWN 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	21 W
Luminous Flux	1800/2000 lm	Rated Input Voltage	220-240 V/AC
Length	100 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	238 mm	Control	Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08

Article	Housing Color		Price
731199	Light grey	WW NW	**€ 259.95**
731200	Dark grey	WW NW	**€ 259.95**
731201	White	WW NW	**€ 259.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 14.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 14.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO SQUARE UP+DOWN 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Length	140 mm	Light Beam Angle	36 Degree
Width	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Height	332 mm		
Base Length	44.5 mm	CRI (Ra)	90
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Luminous Flux	Power	Price
731187	Light grey	WW NW	3200/3400 lm	31.5 W	**€ 369.95**
731188	Dark grey	WW NW	3200/3400 lm	31.5 W	**€ 369.95**
731189	White	WW NW	3200/3400 lm	31.5 W	**€ 369.95**
731190	Light grey	WW NW	5400/5800 lm	55.0 W	**€ 459.95**
731191	Dark grey	WW NW	5400/5800 lm	55.0 W	**€ 459.95**
731192	White	WW NW	5400/5800 lm	55.0 W	**€ 459.95**

IP65

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 12.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 12.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 17.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 17.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 17.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND UP+DOWN 68

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	7.5 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	700/780 lm	Power Supply Unit incl.	Yes
Height	186 mm	Light Beam Angle	30 Degree
Ø	68 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Price
731220	Light grey	WW NW	**€ 199.95**
731221	Dark grey	WW NW	**€ 199.95**
731222	White	WW NW	**€ 199.95**

IP65

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome	**€ 7.95**
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome	**€ 7.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND UP+DOWN 100

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power	20 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1700/1900 lm	Power Supply Unit incl.	Yes
Height	238 mm	Light Beam Angle	36 Degree
Ø	100 mm	Control	Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08
Base Height	130 mm		

Article	Housing Color		Price
731193	Light grey	WW NW	**€ 259.95**
731194	Dark grey	WW NW	**€ 259.95**
731195	White	WW NW	**€ 259.95**

Accessories

930867	Cover, 100, line, ShoreLine Pro Series, dark grey	**€ 9.95**
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey	**€ 9.95**
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome	**€ 14.95**
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome	**€ 14.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

SHORELINE PRO ROUND UP+DOWN 140

- **light colour adjustable in 2 stages**
- **through-wiring possible**
- **seawater resistant**
- **separable mounting plate through plug connection**
- **angled fixing screw for better installation**
- **opt. Spacer for surface mounting**
- **opt. interchangeable reflector inserts / reflectors**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	332 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm		
Base Width	80 mm	CRI (Ra)	92
Base Height	130 mm	IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Power	Price
731175	Light grey	WW NW	3100/3400 lm	31.0 W	**€ 359.95**
731176	Dark grey	WW NW	3100/3400 lm	31.0 W	**€ 359.95**
731177	White	WW NW	3100/3400 lm	31.0 W	**€ 359.95**
731178	Light grey	WW NW	5100/5600 lm	54.0 W	**€ 459.95**
731179	Dark grey	WW NW	5100/5600 lm	54.0 W	**€ 459.95**
731180	White	WW NW	5100/5600 lm	54.0 W	**€ 459.95**

Accessories

930869	Cover, 140, line, ShoreLine Pro Series, dark grey	**€ 12.95**
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey	**€ 12.95**
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome	**€ 17.95**
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome	**€ 17.95**
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome	**€ 17.95**
930874	Spacer for ShoreLine Pro series, light grey	**€ 5.95**
930877	Spacer for ShoreLine Pro series, dark grey	**€ 5.95**
930880	Spacer for ShoreLine Pro series, white	**€ 5.95**

IP44

NOVA

·Motion/twilight sensor

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Stainless steel	Base Ø	110 mm
Width	145 mm	Max. Power	1x max. 40 W
Height	388 mm	Rated Input Voltage	220-240 V/AC
Ø	75 mm	Colour of Light Output	White
Base Height	25 mm		

Article	Housing Color	Price
730034	Silver	**€ 79.95**

E27 | IP44

page 465

Light sources
For all lights and bases:
You can find the right light sources in the »Light sources« section.

IP54

ORTIS

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	77 mm
Colour Temperature	3000 K	Base Height	67 mm
Luminous Flux	510 lm	Power	15.9 W
Length	260 mm	Rated Input Voltage	220-240 V/AC
Width	120 mm	Power Supply Unit incl.	Yes
Height	181 mm	Light Beam Angle	360 Degree
Ø	120 mm	CRI (Ra)	80
Base Length	100 mm		

Article	Housing Color		Price
731031	Dark grey	WW	**€ 199.95**

page 478

FACADO 2 SQUARE

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **IP65 weather resistance**
- **Newly designed lamp head for improved illumination**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Height	261.5 mm
Surface	Matt	Max. Power	1x max. 20 W
Length	148 mm	Rated Input Voltage	220-240 V/AC
Width	108 mm	Control	Dimmable via optional light source

Article	Housing Color	Colour of Light Output	Price
731151	Dark grey	Smoke-coloured	**€ 124.95**
731157	Dark grey	White	**€ 124.95**

E27 IP65

Accessories

180359	MAS VLE E27 ST64 4 W 1,800 K gold-coloured	**€ 39.95**
180361	CLA150 E27 DIM 18 W 3,300 K, matt	**€ 27.95**

page 466

FACADO 2 ROUND

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **IP65 weather resistance**
- **Newly designed lamp head for improved illumination**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Ø	108 mm
Surface	Matt	Max. Power	1x max. 20 W
Length	144 mm	Rated Input Voltage	220-240 V/AC
Height	261.5 mm	Control	Dimmable via optional light source

Article	Housing Color	Colour of Light Output	Price
731153	Dark grey	Smoke-coloured	**€ 124.95**
731155	Rust	Smoke-coloured	**€ 124.95**
731154	Dark grey	White	**€ 124.95**
731156	Rust	White	**€ 124.95**

E27 IP65

Accessories

180359	MAS VLE E27 ST64 4 W 1,800 K gold-coloured	**€ 39.95**
180361	CLA150 E27 DIM 18 W 3,300 K, matt	**€ 27.95**

page 468

TUCANAE

- **Modern minimalist design**
- **Powerful and energy saving**
- **Uniform illumination**
- **Adjustable brightness threshold and operating time [model-dependent]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	135 mm
Colour Temperature	3000 K	Base Height	15 mm
Luminous Flux	1650 lm	Power	18 W
Length	140 mm	Rated Input Voltage	110-240 V/AC
Width	172 mm	Power Supply Unit incl.	Yes
Height	219 mm	Light Beam Angle	110 Degree
Base Length	125 mm	CRI (Ra)	80



731133

Article	Housing Color		IP Protection Type	Motion Detector	Price
731133	Dark grey	ww	IP 54	Yes	**€ 198.95**
731144	Dark grey	ww	IP 65	No	**€ 185.95**



Accessories
180512 BASIC, CC, CC35018/18 W **€ 23.95**

page 480

IP65

ACHERNAR

·Exchangeable lamp GU10 [retrofit]

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Height	95 mm	Control	Dimmable via optional light source
Ø	63 mm		

Article	Housing Color	Length	Base Length	Base Width	Max. Power	Price
731130	Dark grey	108 mm			1x max. 50.0 W	**€ 46.95**
731131	Dark grey	158 mm	125 mm	135 mm	2x max. 35.0 W	**€ 56.95**

GU10 | IP65

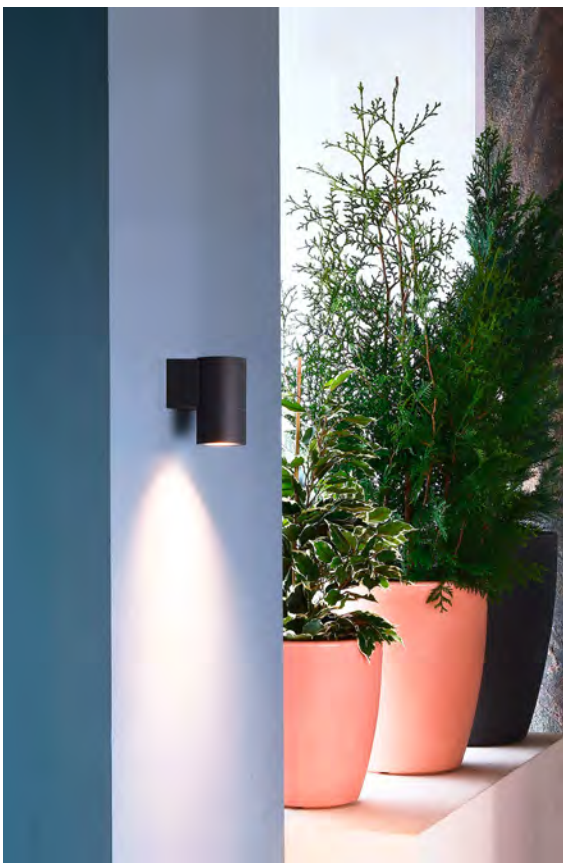

IP54

CUBODO 2

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	108 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	108 mm	Power Supply Unit incl.	Yes
Width	108 mm	Light Beam Angle	19 Degree
Height	115 mm	CRI (Ra)	80
Base Length	108 mm		



731026

Article	Housing Color		Luminous Flux	Power	Light Beam Angle 2	Light Direction	IK Protection Class	Price
731024	Dark grey	WW	600 lm	8.5 W		Below	IK04	**€ 159.95**
731025	Light gray	WW	600 lm	8.5 W		Below	IK04	**€ 159.95**
731026	White	WW	600 lm	8.5 W		Below	IK04	**€ 159.95**
731015	Dark grey	WW	1300 lm	16.0 W	19 Degree	Top / Below	IK04	**€ 179.95**
731019	Light gray	WW	1300 lm	16.0 W	19 Degree	Top / Below	IK04	**€ 179.95**
731020	White	WW	1300 lm	16.0 W	19 Degree	Top / Below	IK04	**€ 179.95**

IP54 | A ↑ G | G

IP54

CUBODO 2 MINI

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Height	20 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Length	90 mm	Power Supply Unit incl.	Yes
Width	68 mm	Light Beam Angle	46 Degree
Base Length	65 mm	CRI (Ra)	77
Base Width	65 mm		



731029

Article	Housing Color		Luminous Flux	Height	Power	Light Direction	Price
731029	Dark grey	WW	220 lm	70 mm	5.0 W	Below	**€ 119.95**
731030	Dark grey	WW	440 lm	108 mm	9.9 W	Top / Below	**€ 149.95**

IP54 | A ↑ G | G

CAN IP65

The CAN IP65 surface-mounted wall light is a robust and versatile solution for outdoor areas. Available as a classic wall light and as an up/down variant with light emission on both sides, it is ideal for demanding environments. The IP65 certification guarantees protection against dust and water. The widely used GU10 base enables quick and simple replacement of the lamp. Push terminals for rigid and flexible conductors facilitate simple installation. The CAN outdoor light is part of a versatile series and is also available as a pendant, ceiling, wall and reading light.

page 46

page 88

page 90

page 414

CAN IP65

- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Length	87 mm	Rated Input Voltage	220-240 V/AC
Height	108 mm	Control	Dimmable via optional light source
Ø	80 mm		

Article	Housing Color	Price
731223	White	**€ 59.95**
731224	Black	**€ 59.95**

GU10 | IP65

CAN UP & DOWN IP65

- **Replaceable lamp to offer an individual lighting solution**
- **Can be combined with the comprehensive product family of the CAN series**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Max. Power	2x max. 7.5 W
Length	87 mm	Rated Input Voltage	220-240 V/AC
Height	212 mm	Control	Dimmable via optional light source
Ø	80 mm		

Article	Housing Color	Price
731225	White	**€ 89.95**
731226	Black	**€ 89.95**

GU10 | IP65

JABBAH

The square JABBAH uses integrated COB LEDs in warm white, emitting its light asymmetrically at an angle of 75° onto walls in a cone of illumination - in a simple variant providing 915 lumens, as an UP AND DOWN version providing a total of 1,850 lumens. In addition, the two-sided JABBAH can be dimmed to 60 % luminous flux using a dip switch, if a more subtle light is desired.

JABBAH

- **Feed-through wiring possible**
- **Mounting plate can be disconnected via plug**
- **Quick and secure installation**
- **Incl. wall spacer for surface-mounted cable entry**
- **Power adjustable in 2 stages (model-dependent)**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power Selectable	13 W, 25 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1850 lm	Power Supply Unit incl.	Yes
Length	150 mm	Light Beam Angle	75 Degree
Width	150 mm	CRI (Ra)	80
Height	150 mm		



731127

Article	Housing Color		Price
731127	Dark grey	WW	**€ 345.95**

IP65 A↑G G

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

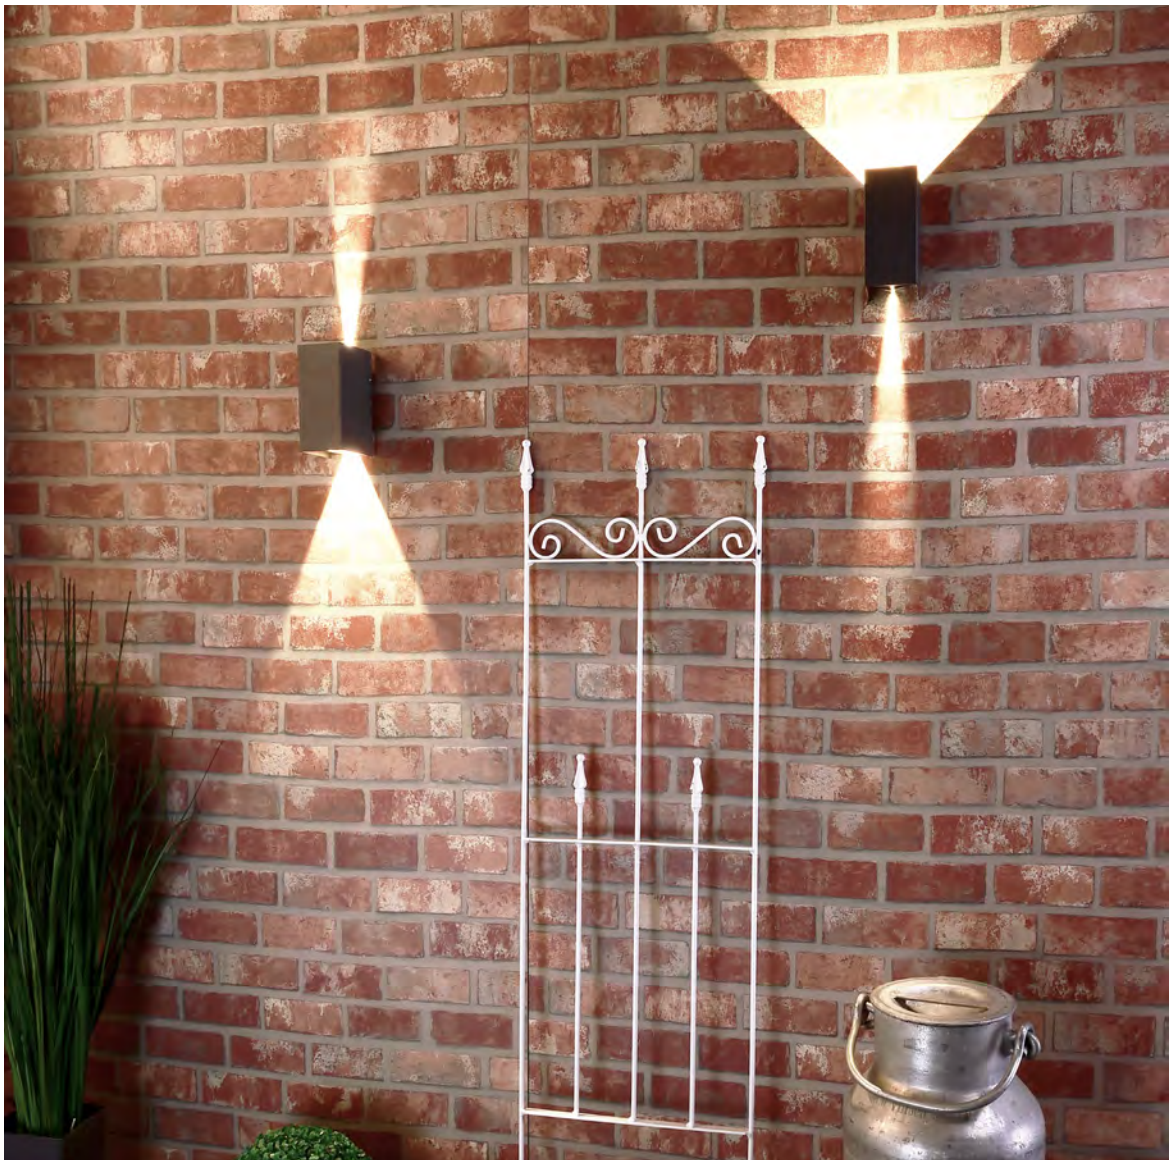

ARCTURUS

The ARCTURUS LED wall-mounted light has a modern cube design [optionally also elongated] and is suitable for flexible lighting outdoors. Using an integrated shutter, the beam angle of the IP54 light can be adjusted between 0° and 90° in order to generate a different light pattern depending on the requirements of the application. Protected in the dark grey die-cast aluminium housing are the two high-power LEDs, which generate 5.5 W of warm-white light.

IP54

ARCTURUS

- **Continuously adjustable light emission angle 0-90°**
- **Uplight and downlight separately adjustable**
- **Ideal for customised lighting accents**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	90 Degree
Power	6 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		



731099

Article	Housing Color		Luminous Flux	Length	Width	Height	Base Length	Price
731099	Dark grey	WW	200 lm	110 mm	79 mm	172 mm	68 mm	**€ 109.95**
731100	Dark grey	WW	208 lm	105 mm	140 mm	145 mm	75 mm	**€ 109.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

IP65

LINEAR 250

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Width	53 mm
Colour Temperature	3000 K	Base Height	15 mm
Length	250 mm	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Length	242 mm	CRI (Ra)	80



731135

Article	Housing Color		Luminous Flux	Power	Light Direction	Price
731135	Dark grey	WW	600 lm	8.0 W	Below	**€ 149.95**
731136	Dark grey	WW	1155 lm	14.0 W	Top / Below	**€ 184.95**

IP65 | A↑G | G

IP65

LINEAR 500

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Width	53 mm
Colour Temperature	3000 K	Base Height	15 mm
Length	500 mm	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Length	493 mm	CRI (Ra)	80



731129

Article	Housing Color		Luminous Flux	Power	Light Direction	EEI	Price
731134	Dark grey	WW	1230 lm	14.0 W	Below	A↑G F	**€ 194.95**
731129	Dark grey	WW	1760 lm	20.0 W	Top / Below	A↑G G	**€ 214.95**

IP65

IP54

RILONGO

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Length	250 mm	Control	Dimmable via optional light source
Width	110 mm		
Max. Power	1x max. 18 W		

Article	Housing Color	Height	Base Length	Base Width	Colour of Light Output	Price
730330	Dark grey	103 mm	250 mm	110 mm	White	**€ 79.95**
730331	Brown	103 mm	250 mm	110 mm	White	**€ 79.95**
731060	Dark grey	110 mm	100 mm	70 mm		**€ 79.95**

ALKES

The ALKES series is not a traditional wall-mounted light, but, with its SMD-LED panel, has floodlight similarities. The highlight: the upper housing part is tilted forwards 45° from the façade to direct the warm white light in a targeted manner onto the surface to be illuminated. In addition, the ALKES also looks great when switched off with its modern design and rounded edges.

IP65

ALKES

- **high luminous efficacy**
- **homogeneous light distribution**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	110 Degree
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80



731138

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
731138	Dark grey	ww	920 lm	200 mm	126 mm	184 mm	21.0 W	**€ 104.95**
731140	Dark grey	ww	1720 lm	297 mm	165 mm	240 mm	36.0 W	**€ 175.95**

IP65

ALKES MOTION

- **high luminous efficacy**
- **homogeneous light distribution**

Application Area
Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Light Beam Angle	110 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Motion Detector	Yes
Power Supply Unit incl.	Yes		



731139

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
731139	Dark grey	ww	735 lm	200 mm	126 mm	184 mm	21.0 W	**€ 124.95**
731141	Dark grey	ww	1720 lm	297 mm	165 mm	240 mm	36.0 W	**€ 195.95**

GRUMIUM ANGULAR CCT

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.

CCT IP54

GRUMIUM ANGULAR CCT

· light colour adjustable in 2 stages

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000/4000 K	Base Ø	195 mm
Length	100 mm	Power	10 W
Width	70 mm	Rated Input Voltage	220-240 V/AC
Height	200 mm	Power Supply Unit incl.	Yes
Base Width	95 mm	CRI (Ra)	80

Article	Housing Color	Shape		Luminous Flux	Light Beam Angle	Light Direction	Price
620124	Dark grey	lines diagonal	WW NW	205 lm	138 Degree	Top / Below / Side	**€ 114.95**
620125	Dark grey	lines horizontally	WW NW	280 lm	138 Degree	Top / Below / Side	**€ 114.95**
620126	Dark grey	lines vertical	WW NW	300 lm	180 Degree	Top / Below / Side	**€ 114.95**
620127	Dark grey	upside/below	WW NW	440 lm	150 Degree	Side	**€ 114.95**
620123	Dark grey	borders	WW NW	450 lm	138 Degree	Top / Below / Side	**€ 114.95**

IP54 A↑G F

IP54

GRUMIUM ROUND

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000 K	Base Ø	195 mm
Length	100 mm	Power	10 W
Width	70 mm	Rated Input Voltage	220-240 V/AC
Height	200 mm	Power Supply Unit incl.	Yes
Base Width	95 mm	CRI (Ra)	80



620128

Article	Housing Color	Shape		Luminous Flux	Light Beam Angle	Light Direction	Price
620129	Dark grey	Taille	WW	210 lm	160 Degree	Top / Below / Side	**€ 114.95**
620130	Dark grey	lines horizontally	WW	250 lm	160 Degree	Top / Below / Side	**€ 114.95**
620128	Dark grey	upside/below	WW	325 lm	180 Degree	Side	**€ 114.95**

IP54 A↑G F

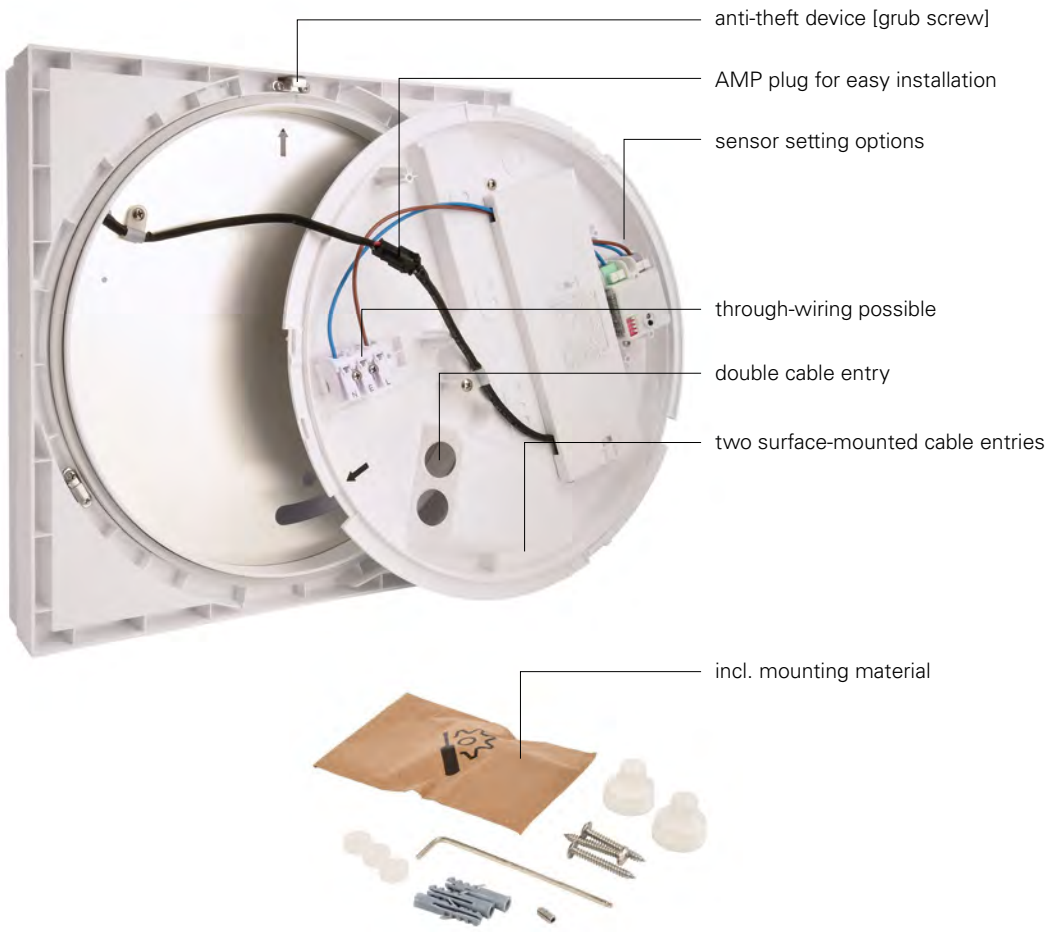

CASA

The CASA house number light has space for up to four digits and/or letters each 10 cm high, ensuring house numbers can be easily read. With a configurable twilight switch, the wall light automatically adjusts to the ambient brightness. The light colour can also be adjusted in two stages (3,000 K/4,000 K).

Multiple cable entries and the option of feed-through wiring mean that installation is simple and flexible. Anti-theft protection also prevents unauthorised removal.

Note: Stickers for numbers/letters are optionally available

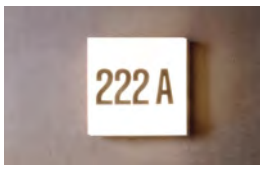

CASA

- **Space for four digits and letters each 10 cm high**
- **Adjustable daylight sensor**
- **Adjustable light colour 3,000/4,000 K**
- **Multiple cable entries incl. feed-through wiring**
- **Easy and quick mounting with anti-theft protection**
- **Set of number/letter stickers optionally available**

Application Area
Reception / Communication, Garden / Terrace / Balcony / Walkways, Garage / carport / car park

Surface	Matt	Power	3 W
Colour Temperature	3000/4000 K	Rated Input Voltage	200-240 V/AC
Length	275 mm	Power Supply Unit incl.	Yes
Width	275 mm	Light Beam Angle	120 Degree
Height	64 mm	CRI (Ra)	80
Base Height	14 mm	Light Direction	Front
Base Ø	245 mm	IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Housing	Price
731159	Black	WW NW	250/260 lm	PP - Polypropylene	**€ 109.95**
731158	White	WW NW	270/280 lm	Polycarbonate	**€ 109.95**

IP54

Accessories

930807	Numbers set 0-9 for Casa	**€ 10.95**
930808	Letters set A-F for Casa	**€ 6.95**

ceiling and wall lights

page 522

page 522

page 523

IP54

MOB

Housing	Aluminium	Max. Power	1x max. 9 W
Height	92 mm	Rated Input Voltage	220-240 V/AC
Ø	108 mm	Control	Dimmable via optional light source
Base Ø	100 mm		

Article	Housing Color	Price
730408	Dark grey	**€ 72.95**

GX53 | IP54

IP54

ASCELLA

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Power	30 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	2300 lm	Power Supply Unit incl.	Yes
Height	50 mm	Light Beam Angle	113 Degree
Base Height	12 mm	CRI (Ra)	80
Base Ø	270 mm		



348070

Article	Housing Color		Length	Width	Ø	Price
348069	Dark grey	WW			340 mm	**€ 259.95**
348070	Dark grey	WW	340 mm	340 mm		**€ 259.95**

IP54 | A ↑ G G

IK08 IP65 UGR<10

MENSAE

- **Corridor function**
- **Adjustable motion detector [hold time / detection area]**
- **Daylight sensor**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door

Housing	Aluminium	Rated Input Voltage	100-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Height	54 mm	CRI (Ra)	80
Base Height	28.5 mm	Motion Detector	Yes
Base Ø	170 mm	IK Protection Class	IK08
Power	16 W		

Article	Housing Color		Luminous Flux	Length	Width	Ø	Light Beam Angle	Price
348071	Dark grey	WW	1400 lm	300 mm	300 mm		115 Degree	**€ 249.95**
348072	Dark grey	WW	1500 lm			300 mm	110 Degree	**€ 249.95**

IP65

built in wall lights

page 526

page 527

page 528

page 529

IP65

LIGHT BASE 2

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	55 lm	Installation Depth	70 mm
Length	96 mm	Cut Out Length	95 mm
Width	96 mm	Cut Out Width	95 mm
Height	77 mm	CRI (Ra)	80
Power	1.3 W		

Article	Housing Color		Price
763025	Grey	WW	**€ 99.95**

IP65

COVER, LIGHT BASE II COB OUTDOOR SERIES

Housing	Aluminium	Width	100 mm
Length	100 mm		

Article	Housing Color	light output	Height	Price
930419	White	stripe	8 mm	**€ 20.95**
930414	Light gray	stripe	8 mm	**€ 19.95**
930420	Black	stripe	8 mm	**€ 19.95**
930416	White	step	24 mm	**€ 19.95**
930417	Light gray	step	24 mm	**€ 19.95**
930418	Black	step	24 mm	**€ 19.95**
930421	White	linear	24 mm	**€ 20.95**
930422	Light gray	linear	24 mm	**€ 19.95**
930415	Black	linear	24 mm	**€ 19.95**
930413	White	round	24 mm	**€ 20.95**
930423	Light gray	round	24 mm	**€ 19.95**
930424	Black	round	24 mm	**€ 19.95**

IP65 Ra>90

LIGHT BASE 3

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	88 lm	Installation Depth	78 mm
Length	245 mm	Light Beam Angle	115 Degree
Width	85 mm	Cut Out Length	245 mm
Height	78 mm	Cut Out Width	85 mm
Power	4.3 W	CRI (Ra)	90

Article	Housing Color		Price
763026	Black	WW	**€ 119.95**

IP65 A↑G G

COVER, LIGHT BASE III OUTDOOR SERIES

Housing	Aluminium	Width	90 mm
Length	250 mm		

Article	Housing Color	light output	Height	Price
930470	White	stripe	9 mm	**€ 59.95**
930471	Grey	stripe	9 mm	**€ 59.95**
930472	Black	stripe	9 mm	**€ 59.95**
930461	White	step	24 mm	**€ 59.95**
930468	Grey	step	24 mm	**€ 59.95**
930469	Black	step	24 mm	**€ 59.95**
930473	White	angled	24 mm	**€ 59.95**
930474	Grey	angled	24 mm	**€ 59.95**
930475	Black	angled	24 mm	**€ 59.95**
930476	White	rounded	24 mm	**€ 59.95**
930477	Grey	rounded	24 mm	**€ 59.95**
930478	Black	rounded	24 mm	**€ 59.95**

page 532

spherical lamps

DORADUS

Light in its most beautiful form - The sphere is and remains one of the most striking of shapes. With the opportunity to illuminate it from within, what could be better. The spherical light looks great both indoors and outdoors. Optimum effect is achieved by using a dimmable LED lamp with RGB or colour change function. Be mesmerized with cosy red, calming green and deep blue. With a warm white lamp too, the light emanating from this spherical light is something rather special.

IK07 IP65

DORADUS

- **ball housing IP65 protected**
- **seawater resistant**
- **ready to plug in with 3 m connection cable**
- **incl. ground spike**

Application Area
Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Polyethylene	Primary Connection End	Power plug IP44
Sockets	1 PCS	Control	Dimmable via optional light source
Max. Power	1x max. 23 W	IP Protection Type Plug	IP 44
Rated Input Voltage	220-240 V/AC		
Primary Cable Length	3 m		

Article	Housing Color	Height	Ø	Price
836011	White	230 mm	250 mm	**€ 139.95**
836930	White	350 mm	380 mm	**€ 169.95**
836014	White	420 mm	450 mm	**€ 199.95**
836931	White	530 mm	560 mm	**€ 319.95**



Accessories

843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 46.95**
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**

Accessories for **836931**

843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 64.95**

energy distributor

page 536

page 538

page 540

page 542

ARAWAN

Sometimes it's about more than just light. With our multiple socket tower, available with or without light, another gap in our range is filled. Design your garden even more flexibly, in proven DEKO-LIGHT quality of course and at a price that won't break the bank.

ARAWAN

- **Safe power distribution outdoors**
- **Total load max. 3,680 W**
- **Outlets and lights can be switched on separately**
- **Connection box with IP67 and accessories including in scope of delivery**
- **Feed-through wiring possible**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	100 mm	Primary Connection End	Connection box IP67
Connected Load max.	3680 W		

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Power	Power Supply Unit incl.	EEI	Price
733055	Dark grey			400 mm				**€ 119.95**
733054	Dark grey	WW 3000 K	150 lm	478 mm	4.8 W	Yes	A G F	**€ 169.95**

IP44

PUKA MANA

A garden is pure nature and yet needs power in several different places. With the PUKA MANA, you can flexibly access power to operate lawnmowers and other gardening tools or simply to charge your e-bike or smartphone. The multiple socket tower has two socket outlets and can be installed particularly easily using our multi-outdoor cable connectors. The sophisticated cable routing ensures a clean visual design.

IP54 on off

PUKA MANA

- **Door can be completely closed when angled plugs are plugged in**
- **Total load: max. 3,680 W**
- **Easy to install thanks to IP68 cable connector**
- **Light can be switched on separately [only art. no. 733067]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Connected Load max.	3680 W
Length	100 mm	Rated Input Voltage	220-240 V/AC
Width	100 mm	Primary Connection End	Connection box IP67

Article	Housing Color	Height	Socket / Base	Max. Power	Price
733066	Dark grey	420 mm			**€ 169.95**
733067	Dark grey	620 mm	E27	1x max. 13.0 W	**€ 249.95**

IP54

Accessories

931073	Cover for Multiple socket tower Puka Mana 420 mm	**€ 9.95**

FACADO SOCKET

FACADO series standing lights have been proving quite the hit for some time on paved paths in gardens. Now, the classically elegant outdoor lights are becoming that much more versatile: The FACADO SOCKET contains two electrical outlet points, serving as a practical power distributor in gardens, on patios or on paths. The lamps can also be changed thanks to the E27 base and adapted to the desired lighting atmosphere. The FACADO SOCKET is available in two heights [65 and 100 cm].

FACADO SOCKET

- **Total load: max. 3,680 W**
- **Outlets and light can be switched on separately**
- **Feed-through wiring possible**
- **Replaceable lamp [E27]**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 20 W
Width	108 mm	Connected Load max.	3680 W
Height	108 mm	Rated Input Voltage	220-240 V/AC

Article	Housing Color	Length	Price
733064	Dark grey	650 mm	**€ 199.95**
733065	Dark grey	1000 mm	**€ 219.95**

LERNA

LERNA series power distributors offer a number of advantages. With two sockets and a total load of 3,680 W, they allow you to connect various devices while providing reliable lighting. Light and sockets can be switched separately (separate L+N). The socket cover latches open for additional convenience. The ability to adjust the light colour in two stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With an output of 6 W and 516 lm, the light itself is incredibly bright.

page 472

LERNA

- **Socket cover latches open**
- **Total socket output: 3,680 W**
- **Light colour adjustable in two stages**
- **Light and socket can be switched separately (separate L+N)**
- **Light directed fully downwards to prevent light pollution**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06
Connected Load max.	3680 W		

Article	Housing Color		Height	Price
733071	Dark grey	WW NW	600 mm	**€ 269.95**
733070	Dark grey	WW NW	1000 mm	**€ 309.95**

CC IP65

surface mounted / ground spike

page 546

page 548

page 549

page 550

page 551

page 552

page 553

DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

The RF-Smart SPOT spotlight with ground spike offers dimmable brightness and colour saturation, 16 million colours and adjustable colour temperatures. This spotlight has eight pre-installed automatic programs and the ability to synchronise with other RF-Smart components, offering maximum flexibility. Can be controlled using RF-smart wireless remote controls (2.4 GHz, range approx. 30 m, not in scope of delivery) as well as all Zigbee 3.0 compatible controllers and apps such as Amazon Echo (Alexa), Google Assistant and Tuya (appropriate gateway required). The very narrow beam angle makes it ideal for column lighting and similar applications.

DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

- **Adjustable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 automatic programmes pre-installed**
- **Program and remote control synchronisation when operating multiple RF smart components (repeater function)**
- **Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)**
- **Very narrow light emission angle, perfect for column lighting or similar**

Application Area
Object lighting / architecture, Garage / carport / car park

Housing	Aluminium, Plastic	Power Supply Unit incl.	Yes
Colour Temperature	2700-6500 K	Light Beam Angle	15 Degree
Luminous Flux	1700 lm	Swivelling Angle	355 Degree
Length	170 mm	Control	RF-Smart, ZigBee 3.0
Width	65 mm	Primary Cable Length	1.5 m
Height	180 mm	CRI (Ra)	80
Power	25 W	Light Direction	Front
Rated Input Voltage	100-240 V/AC	IP Protection Type Plug	IP 44

Article	Housing Color	Colour Temperature	Price
843521	Anthracite	RGB WW CW 2700-6500 K	**€ 239.95**

IP65 | 5 CH | A ↑ G F

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
930659	Wall bracket/display arm, metal, black, length: 800 mm	**€ 59.95**

SPIKY

- **Replaceable GU10 lamp (retrofit)**
- **Incl. 2 m connecting cable with IP44 plug**
- **Incl. ground spike**
- **Incl. cover (art. no. 732161 only)**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Plastic	Control	Dimmable via optional light source
Surface	Matt	Swivelling Angle	180 Degree
Max. Power	1x max. 35 W	IP Protection Type Plug	IP 44
Rated Input Voltage	220-240 V/AC		
Primary Connection End	Power plug		

Article	Housing Color	Height	Ø	Primary Cable Length	Price
732161	Black	345 mm	100 mm	2.5 m	**€ 34.95**
732160	Dark grey	420 mm	60 mm	2 m	**€ 39.95**

GU10 IP65

Accessories

843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 46.95**
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+C-CT	**€ 109.95**

IP65

KEID

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Length	120 mm	Swivelling Angle	180 Degree
Height	457 mm	Primary Cable Length	0.5 m
Ø	75 mm	Primary Connection End	Connection box IP65
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Power	Price
732094	Dark grey	WW	800 lm	10.3 W	**€ 139.95**
732095	Dark grey	WW	1350 lm	21.5 W	**€ 149.95**

COLT 8 W COB + 8 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Ø	77 mm
Colour Temperature	3000 K	Base Height	50 mm
Length	66 mm	Base Ø	96 mm
Height	185 mm	Swivelling Angle	180 Degree



732108

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	Light Beam Angle	Power Supply incl.	Price
732127	Dark grey	RGB WW	389 lm	8.6 W	24 V/DC	20°	No	**€ 299.95**
732108	Dark grey	WW	470 lm	7.0 W	220-240 V/AC	40°	Yes	**€ 199.95**

IP65 | A ↑ G | G

Accessories

930441	Surface-mounted housing for Colt 8 W series		**€ 59.95**
930426	Ground spike for Colt series 4/8 W, M5		**€ 9.95**

Accessories for **732108**

930431	12° reflector for Colt 8 W series		**€ 8.95**
930432	22° reflector for Colt 8 W series		**€ 8.95**
930587	Connecting cable with 230 V power plug		**€ 19.95**

Accessories for **732127**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**
862230	OCTO, CV, Mini 24 V/12 W		**€ 21.95**
872083	IP, CV, V6-40-24		**€ 74.95**

COLT 15 W COB + 16 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Ø	110 mm
Colour Temperature	3000 K	Base Height	56 mm
Length	88 mm	Base Ø	120 mm
Height	220 mm	Swivelling Angle	180 Degree



732109

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	Light Beam Angle	Power Supply incl.	Price
732128	Dark grey	RGB WW	780 lm	16.0 W	24 V/DC	20°	No	**€ 449.95**
732109	Dark grey	WW	1090 lm	14.0 W	220-240 V/AC	40°	Yes	**€ 249.95**

IP65 A↑G G

Accessories

930442	Surface-mounted housing for Colt 15/30 W series		**€ 69.95**
930427	Ground spike for Colt series 15/25/30/36/65 W, M10		**€ 11.95**

Accessories for **732109**

930434	12° reflector for Colt 15 W series		**€ 10.95**
930435	22° reflector for Colt 15 W series		**€ 11.95**
930587	Connecting cable with 230 V power plug		**€ 19.95**

Accessories for **732128**

862122	FLAT, CV, UT 24 V/50 W		**€ 52.95**
862164	BASIC, CV, Q8H-24-75 W		**€ 74.95**
872083	IP, CV, V6-40-24		**€ 74.95**
872085	IP, CV, V6-75-24		**€ 94.95**
930426	Ground spike for Colt series 4/8 W, M5		**€ 9.95**

COLT 30 W COB + 25 W RGBW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Ø	131 mm
Colour Temperature	3000 K	Base Height	56 mm
Length	112 mm	Base Ø	120 mm
Height	260 mm	Swivelling Angle	180 Degree



732110

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	Light Beam Angle	Power Supply incl.	Price
732129	Dark grey	RGB WW	1140 lm	25.0 W	24 V/DC	20°	No	**€ 499.95**
732110	Dark grey	WW	2320 lm	29.0 W	220-240 V/AC	40°	Yes	**€ 289.95**

IP65 A ↑ G G

Accessories

930442	Surface-mounted housing for Colt 15/30 W series		**€ 69.95**
930427	Ground spike for Colt series 15/25/30/36/65 W, M10		**€ 11.95**

Accessories for **732110**

930437	12° reflector for Colt 30 W series		**€ 12.95**
930438	22° reflector for Colt 30 W series		**€ 12.95**
930587	Connecting cable with 230 V power plug		**€ 19.95**

Accessories for **732129**

862163	BASIC, CV, Q8H-24-40 W		**€ 46.95**
862164	BASIC, CV, Q8H-24-75 W		**€ 74.95**
872083	IP, CV, V6-40-24		**€ 74.95**
872085	IP, CV, V6-75-24		**€ 94.95**
872094	IP, CV, V6-100-24		**€ 114.95**

COLT 65 W COB + 36 W RGBWW

- **Replaceable reflectors**
- **Including clear/frosted glass pane**
- **Including honeycomb filter**
- **Feed-through wiring possible**

Application Area
Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Power	36 W
Colour Temperature	2700 K	Rated Input Voltage	24 V/DC
Luminous Flux	1500 lm	Power Supply Unit incl.	Yes
Length	162 mm	Light Beam Angle	20 Degree
Height	192 mm	Swivelling Angle	90 Degree
Ø	182 mm	Control	Dimmable via optional controller
Base Height	65 mm		
Base Ø	160 mm	CRI (Ra)	80

Article	Housing Color		Price
732137	Dark grey	RGB WW	**€ 679.95**

CV | IP65 | III | A ↑ G

Accessories

930558	Surface-mounted housing for Colt 65 W COB/36 W RGBW series	**€ 89.95**
862163	BASIC, CV, Q8H-24-40 W	**€ 46.95**
862164	BASIC, CV, Q8H-24-75 W	**€ 74.95**
862168	BASIC, CV, Q8H-24-150 W	**€ 129.95**
872083	IP, CV, V6-40-24	**€ 74.95**
872085	IP, CV, V6-75-24	**€ 94.95**
872087	IP, CV, V6-150-24	**€ 149.95**
872094	IP, CV, V6-100-24	**€ 114.95**

wall washer

page 556

page 557

WALLWASHER CAPH 24 V

- **Including 0.5 m connecting cable with WEIPU plug**
- **Including 0.5 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

Housing	Aluminium	Power Supply Unit incl.	No
Colour Temperature	3000 K	Control	Dimmable via optional controller
Length	1000 mm	Primary Cable Length	0.5 m
Width	53.36 mm	Primary Connection End	WEIPU plug 5-pole
Height	81.07 mm	CRI (Ra)	80
Power	60 W		
Rated Input Voltage	24 V/DC		

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732072	Dark grey	RGB WW	2480 lm	40 Degree	15 Degree	Asymetric	**€ 415.95**
732071	Dark grey	RGB WW	2800 lm	25 Degree		Symmetric	**€ 415.95**

CV | IP65 | 4 CH | A ↑ G | G

Accessories

862164	BASIC, CV, Q8H-24-75 W		**€ 74.95**
872085	IP, CV, V6-75-24		**€ 94.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**

IP65

WALLWASHER CAPH 230V

·Including 2 m connecting cable with IP44 shaped plug

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Length	1000 mm	Primary Cable Length	2 m
Width	53.36 mm	Primary Connection End	Power plug IP44
Height	81.07 mm	CRI (Ra)	80
Power	38 W	IP Protection Type Plug	IP 44



732080

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732080	Dark grey	WW	2580 lm	40 Degree	15 Degree	Asymetric	**€ 415.95**
732079	Dark grey	WW	3000 lm	25 Degree		Symmetric	**€ 415.95**

ground recessed lights

page 560

page 560

page 561

page 562

page 563

page 564

page 564

page 565

page 566

page 567

page 568

page 569

page 570

page 570

page 571

page 572

page 572

page 573

page 574

page 574

page 576

IP67

ATON

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Rated Input Voltage	220-240 V/AC
		Cut Out Ø	70 mm
Height	111 mm	Control	Dimmable via optional light source
Installation Depth	148 mm		
Max. Power	1x max. 7 W		

Article	Housing Color	Length	Width	Ø	Price
730474	Silver			97 mm	**€ 56.95**
730475	Silver	97 mm	97 mm		**€ 56.95**

GU10 | IP67

IP67

PAVO

- **Swivelling insert**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Rated Input Voltage	220-240 V/AC
		Cut Out Ø	100 mm
Height	156 mm	Control	Dimmable via optional light source
Installation Depth	193 mm		
Max. Power	1x max. 9 W	Swivelling Angle	25 Degree

Article	Housing Color	Length	Width	Ø	Price
730478	Silver			160 mm	**€ 114.95**
730479	Silver	160 mm	160 mm		**€ 114.95**

GU10 | IP67

IP67

ALZIRR

- **Including 1 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	98 mm
		Light Beam Angle	30 Degree
Colour Temperature	3000 K	Cut Out Ø	48 mm
Luminous Flux	180 lm	Control	Dimmable via optional controller
Height	82.5 mm		
Ø	55 mm	CRI (Ra)	80
Power	2.4 W	Primary Cable Length	1 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color		Price
730470	Silver	WW	**€ 109.95**

CV | IP67 | III | A ↑ G | G

Accessories

862230	OCTO, CV, Mini 24 V/12 W		**€ 21.95**
872083	IP, CV, V6-40-24		**€ 74.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

IP67

FORNAC

- **Asymmetrical**
- **Including 1 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Light Beam Angle	45 Degree
		Light Beam Angle 2	35 Degree
Colour Temperature	3000 K	Cut Out Ø	48 mm
Luminous Flux	110 lm	Control	Dimmable via optional controller
Height	80 mm		
Ø	55 mm	CRI (Ra)	80
Power	2.7 W	Primary Cable Length	1 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Asymetric
Installation Depth	98 mm		

Article	Housing Color		Price
730447	Silver	WW	**€ 124.95**



Accessories

862230	OCTO, CV, Mini 24 V/12 W		**€ 21.95**
872083	IP, CV, V6-40-24		**€ 74.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.

PEACOCK

·Including 0.5 m connecting cable with protected connection socket

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	150 lm
Height	43 mm
Ø	58 mm
Power	2 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Installation Depth	48 mm
Light Beam Angle	30 Degree
Cut Out Ø	44 mm
CRI (Ra)	80
Primary Connection End	Connection box IP67
IK Protection Class	IK08
Light Distribution	Symmetric

Article	Housing Color		Price
730459	Silver	WW	**€ 114.95**



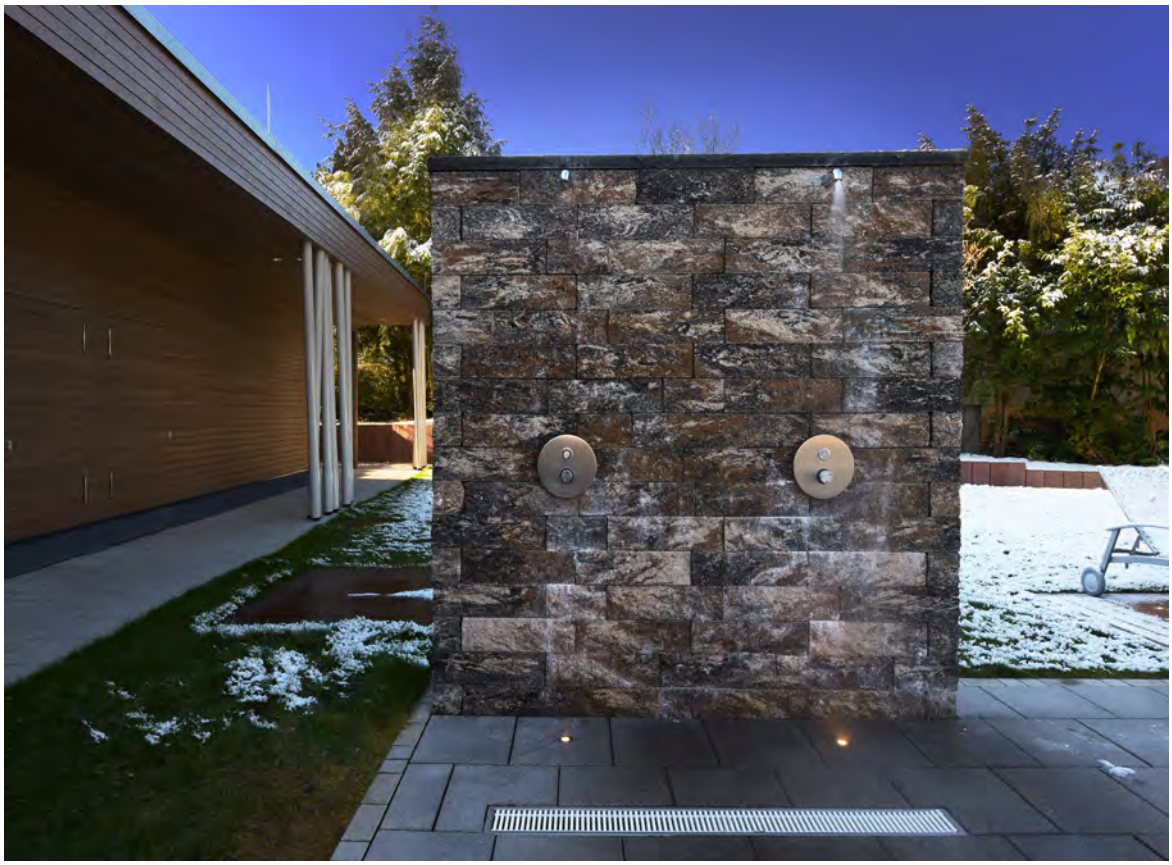

IP67 RGB

FLAT 24V

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Installation Depth	50 mm
Luminous Flux	510 lm	Light Beam Angle	30 Degree
Height	38 mm	Cut Out Ø	150 mm
Ø	173 mm	Control	Dimmable via optional controller
Power	17 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color		Price
100116	Silver	RGB	**€ 319.95**

CV | IP67 | III | 3 CH

Accessories

872083	IP, CV, V6-40-24		**€ 74.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**

IP67

FLAT 230V 20 DEGREE

- **Including 0.5 m connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Light Beam Angle	20 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Primary Cable Length	0.5 m
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color		Luminous Flux	Height	Ø	Power	Installation Depth	Price
100111	Silver	WW	400 lm	44 mm	116 mm	5.8 W	44 mm	**€ 194.95**
100114	Silver	WW	860 lm	42 mm	173 mm	12.2 W	42 mm	**€ 279.95**

IP67 | A ↑ G | G



IP67

FLAT 230V 120 DEGREE

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	40 lm
Height	42 mm
Ø	116 mm
Power	1.3 W
Rated Input Voltage	220-240 V/AC

Power Supply Unit incl.	Yes
Installation Depth	43 mm
Light Beam Angle	120 Degree
Cut Out Ø	100 mm
CRI (Ra)	65
Primary Cable Length	0.5 m
Primary Connection End	Connection box
Light Distribution	Symmetric

Article	Housing Color		Price
730336	Silver	WW	**€ 154.95**

IP67

IP67 SDCM<5

CANUM 24V SYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	150 mm
		Light Beam Angle	45 Degree
Colour Temperature	3000 K	Cut Out Ø	102 mm
Luminous Flux	370 lm	Control	Dimmable via optional controller
Height	102 mm		
Ø	116 mm	CRI (Ra)	80
Power	5.8 W	Primary Cable Length	2 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color		Price
100133	Silver	WW	**€ 195.98**

CV | IP67 | III | A ↑ G | G

Accessories

862230	OCTO, CV, Mini 24 V/12 W	**€ 21.95**
872083	IP, CV, V6-40-24	**€ 74.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control	**€ 99.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

IP67

CANUM 24V ASYMMETRICAL

- **Including 0.5 m connecting cable with WEIPU plug**
- **Asymmetrical**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	45 Degree
		Light Beam Angle 2	35 Degree
Colour Temperature	3000 K	Cut Out Ø	157 mm
Luminous Flux	800 lm	Control	Dimmable via optional controller
Height	111 mm		
Ø	173 mm	CRI (Ra)	80
Power	14 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Asymetric
Installation Depth	153 mm		

Article	Housing Color		Price
730296	Silver	WW	**€ 269.95**

CV | IP67 | III | A ↑ G | G

Accessories

872083	IP, CV, V6-40-24		**€ 74.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		**€ 99.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

IP67 RGB

CANUM RGB 24V SYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	150 mm
Luminous Flux	370 lm	Light Beam Angle	30 Degree
Height	102 mm	Cut Out Ø	102 mm
Ø	116 mm	Control	Dimmable via optional controller
Power	7.4 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color		Price
730276	Silver	RGB	**€ 219.95**

CV | IP67 | III | 3 CH

Accessories

872083	IP, CV, V6-40-24		**€ 74.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		**€ 99.95**

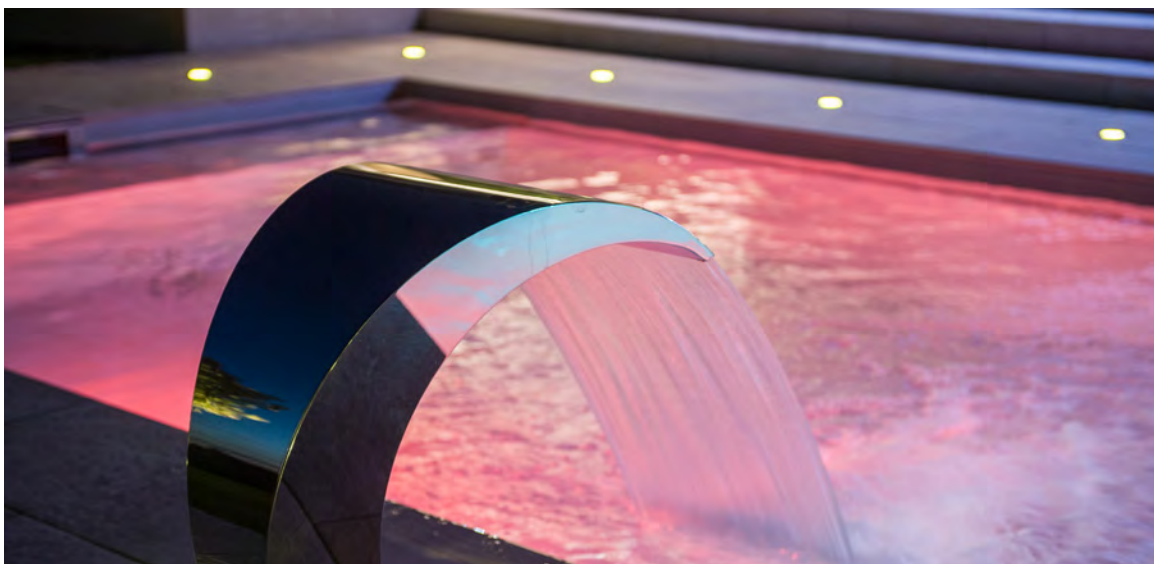

IK07 IP67 RGB

CANUM RGB 24V ASYMMETRICAL

- **Including 0.5 m connecting cable with WEIPU plug**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	50 Degree
Luminous Flux	650 lm	Light Beam Angle 2	35 Degree
Height	111 mm	Cut Out Ø	157 mm
Ø	173 mm	Control	Dimmable via optional controller
Power	16.9 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	IK Protection Class	IK07
Installation Depth	153 mm	Light Distribution	Asymetric

Article	Housing Color		Price
730454	Silver	RGB	**€ 359.95**

CV | IP67

Accessories

872083 IP, CV, V6-40-24 **€ 74.95**
843502 RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20 **€ 99.95**

IP67 SDCM<5

CANUM 230V SYMMETRICAL

- **Including connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	280 lm
Height	102 mm
Ø	116 mm
Power	4.1 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Installation Depth	150 mm
Light Beam Angle	30 Degree
Cut Out Ø	102 mm
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	Connection box
Light Distribution	Symmetric

Article	Housing Color		Price
730255	Silver	WW	**€ 179.95**

IP67 A↑G G

IK09 IP67

CANUM 230V ASYMMETRICAL

- **Asymmetrical**
- **Including 0.5 m connecting cable**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium
Colour Temperature	3000 K
Luminous Flux	700 lm
Height	111 mm
Ø	173 mm
Power	11.9 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Installation Depth	153 mm
Light Beam Angle	45 Degree
Light Beam Angle 2	35 Degree
Cut Out Ø	157 mm
CRI (Ra)	80
Primary Cable Length	0.5 m
Primary Connection End	Connection box
IK Protection Class	IK09
Light Distribution	Asymetric

Article	Housing Color		Price
730289	Silver	WW	**€ 269.95**

IP67 A↑G G

SOFT FLEX

- **Adjustable light emission angle**
- **Including 1 m connecting cable**
- **Including honeycomb filter**

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Swivelling Angle	60 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Primary Cable Length	1 m
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
Installation Depth	220 mm	Light Distribution	Symmetric

Article	Housing Color		Luminous Flux	Height	Ø	Power	Light Beam Angle	Price
730267	Silver	WW	480 lm	128 mm	173 mm	9.3 W	15 Degree	**€ 359.95**
730266	Silver	WW	770 lm	190 mm	250 mm	18.4 W	25 Degree	**€ 599.95**



IP67 SDCM<5

SQUARE BEAM

·Including 0.5 m connecting cable

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Installation Depth	95 mm
Luminous Flux	700 lm	Light Beam Angle	25 Degree
Length	125 mm	Cut Out Length	112 mm
Width	125 mm	Cut Out Width	112 mm
Height	75 mm	CRI (Ra)	80
Power	7.7 W	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color		Price
730209	Silver	WW	**€ 169.95**

IP67 | 1 CH | A ↑ G | E

IP67 SDCM<5

SQUARE SOFT

·Incl. two glass lenses [prism, white]

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Installation Depth	95 mm
Luminous Flux	215 lm	Light Beam Angle	120 Degree
Length	125 mm	Cut Out Length	113.5 mm
Width	125 mm	Cut Out Width	113.5 mm
Height	75 mm	CRI (Ra)	80
Power	3.2 W	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color		Price
730248	Silver	WW	**€ 179.95**

IP67 | A ↑ G | G

HELIOS

- **Incl. four heavy-duty anchors**

Application Area
Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Park / public outdoor area, Stairs / steps, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	60 Degree
Height	54 mm	CRI (Ra)	80
Ø	210 mm	IK Protection Class	IK10
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Number of light outlets	Luminous Flux	Power	EEI	Price
732143	Dark grey	WW 1	34 lm	2.5 W		**€ 119.95**
732049	Dark grey	WW 2	65 lm	3.8 W	A G	**€ 119.95**
732050	Dark grey	WW 3	150 lm	5.5 W	A G	**€ 119.95**

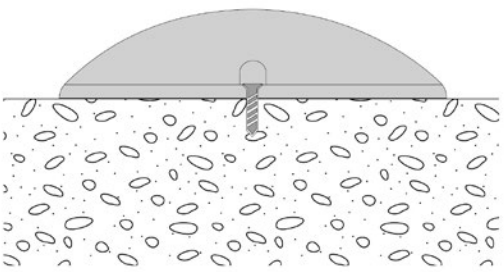
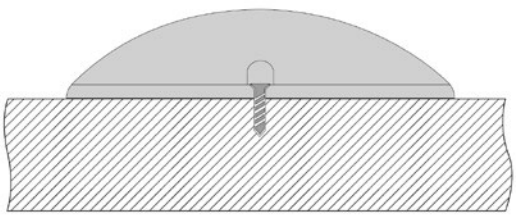

IK07 IP67

LINE

· Incl. connecting cable

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	20 Degree
Colour Temperature	3000 K	Cut Out Width	68 mm
Width	68 mm	CRI (Ra)	80
Height	31.5 mm	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
Power Supply Unit incl.	Yes	IK Protection Class	IK07
Installation Depth	80 mm	Light Distribution	Symmetric

Article	Housing Color		Luminous Flux	Length	Power	Cut Out Length	Price
730434	Silver	WW	1100 lm	549 mm	18.0 W	527 mm	**€ 389.95**
730432	Silver	WW	2300 lm	1025 mm	36.0 W	1007 mm	**€ 628.95**

IP67 | 1 CH | A ↑ G | G

IP67 SDCM<5

LINE ASYMMETRICAL

Application Area
Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	90 mm
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Width	63 mm	Light Beam Angle 2	35 Degree
Height	65 mm	Cut Out Width	58 mm
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
		Light Distribution	Asymetric

Article	Housing Color		Luminous Flux	Length	Power	Cut Out Length	Primary Cable Length	Price
730292	Silver	WW	340 lm	195 mm	5.5 W	180 mm	0.5 m	**€ 185.95**
730262	Silver	WW	730 lm	328 mm	11.9 W	313 mm	1 m	**€ 259.95**

IP67 | A ↑ G | G

MÜLLER
KERN
Weingut
Vinothek
Information
****
Ferienwohnungen
Anmeldung / Reception
Gäste
Guests

TABIT

The TABIT series recessed floor lights have a remarkable square, angular shape and an output of up to 3.7 W at 3,000 K. The lights' paving stone appearance makes them compatible with common paving dimensions. Each lamp is supplied with a 30 cm long connecting cable with open cable ends. They can withstand a load of 5,000 N and can be walked on, though not driven on.

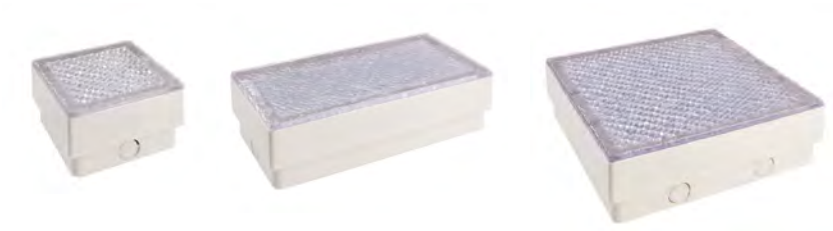

TABIT

- **Paving stone look**
- **Suitable for common paving dimensions**
- **Incl. 30 cm connection line with open cable ends**
- **Can be walked on, cannot be driven on**
- **5,000 N load**

Application Area
Garden / Terrace / Balcony / Walkways

Housing	Polycarbonate	Light Beam Angle	120 Degree
Surface	Transparent	CRI (Ra)	80
Colour Temperature	3000 K	Primary Cable Length	0.3 m
Height	68 mm	Primary Connection End	With free strand / conductor ends
Rated Input Voltage	220-240 V/AC	IK Protection Class	IK10
Power Supply Unit incl.	Yes		
Installation Depth	68 mm		

Article	Housing Color		Luminous Flux	Length	Width	Power	Price
730480	Grey	ww	120 lm	100 mm	100 mm	2.3 W	**€ 29.95**
730481	Grey	ww	240 lm	200 mm	100 mm	3.7 W	**€ 59.95**
730482	Grey	ww	240 lm	200 mm	200 mm	3.7 W	**€ 99.95**

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

floodlight

page 580

page 581

page 582

page 583

DEKO-LIGHT RF-SMART FLOODLIGHT RGB+CCT RF + ZIGBEE

- **Adjustable brightness and colour saturation**
- **16 million available colours and adjustable colour temperature**
- **18 automatic programmes pre-installed**
- **Program and remote control synchronisation when operating multiple RF smart components (repeater function)**
- **Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)**

Application Area
Object lighting / architecture, Garage / carport / car park

Housing	Aluminium, Plastic	Control	RF-Smart, ZigBee 3.0
Colour Temperature	2700-6500 K	Primary Cable Length	1.5 m
Rated Input Voltage	100-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	160 Degree	IP Protection Type Plug	IP 44
Swivelling Angle	345 Degree		



843518

Article	Housing Color		Luminous Flux	Length	Width	Height	Power	Price
843518	Anthracite	RGB WW CW	3300 lm	167 mm	40 mm	227 mm	30.0 W	**€ 249.95**
843519	Anthracite	RGB WW CW	4800 lm	220 mm	48 mm	311 mm	50.0 W	**€ 349.95**
843520	Anthracite	RGB WW CW	10000 lm	295 mm	60 mm	403 mm	100.0 W	**€ 549.95**

IP65 | 5 CH | A ↑ G | E

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
930659	Wall bracket/display arm, metal, black, length: 800 mm	**€ 59.95**

IK08 IP65 SDCM<5

FLOOD SMD

- **Including 1.2 m connecting cable with IP44 shaped plug**
- **Housing made of durable, die-cast aluminium and glass**

Application Area
Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room

Housing	Aluminium	Primary Connection End	Power plug IP44
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	IP Protection Type Plug	IP 44
Light Beam Angle	100 Degree	IK Protection Class	IK08
Primary Cable Length	1.2 m		

Article	Housing Color	Colour Temperature	Luminous Flux	L x W x H	Power	EEI	Price
732147	Silver	WW 3000 K	1800 lm	179 x 143,6 x 27 mm	15 W	E	**€ 89.95**
732148	Black	WW 3000 K	1800 lm	179 x 143,6 x 27 mm	15 W	E	**€ 89.95**
732150	Silver	WW 3000 K	3600 lm	237 x 250 x 40,5 mm	30 W	E	**€ 129.95**
732151	Black	WW 3000 K	3600 lm	237 x 250 x 40,5 mm	30 W	E	**€ 129.95**
732149	Silver	NW 4000 K	1950 lm	179 x 143,6 x 27 mm	15 W	E	**€ 89.95**
732152	Silver	NW 4000 K	3900 lm	179 x 143,6 x 27 mm	30 W	D	**€ 129.95**

page 399

page 399

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

IK08 IP65

BRACHIUM

·Including 2 m connecting cable with IP44 plug

Application Area
Garage / carport / car park, Industry / production / high-bay warehouse

Housing	Aluminium	Power Supply Unit incl.	Yes
Length	316 mm	Light Beam Angle	75 Degree
Width	286 mm	Swivelling Angle	180 Degree
Height	41 mm	Primary Cable Length	2 m
Base Length	327 mm	Primary Connection End	Power plug IP44
Base Width	28 mm	CRI (Ra)	80
Base Height	160 mm	IP Protection Type Plug	IP 44
Power	82 W	IK Protection Class	IK08
Rated Input Voltage	220-240 V/AC		



732105

Article	Housing Color	Colour Temperature	Luminous Flux	Price
732064	Black	WW 3000 K	8100 lm	**€ 199.95**
732105	Black	NW 4000 K	8400 lm	**€ 199.95**

IP65 A ↑ G G

IK08 IP65

ATIK

- **IEC62662 - Protection against mechanical effects (IK Code)**
- **EN60598-2-24 - Lights for use in explosive gas and dust atmosphere (D designation)**
- **Including 2 m connecting cable with IP44 plug**

Application Area
Garage / carport / car park, Industry / production / high-bay warehouse

Housing	Aluminium	Swivelling Angle	180 Degree
Colour Temperature	4000 K	Primary Cable Length	2 m
Length	319 mm	Primary Connection End	Power plug IP44
Width	90 mm	CRI (Ra)	80
Height	411 mm	IP Protection Type Plug	IP 44
Power Supply Unit incl.	Yes	IK Protection Class	IK08
Light Beam Angle	110 Degree		


732102

Article	Housing Color		Luminous Flux	Power	Rated Input Voltage	EEI	Price
732096	Black	NW	21350 lm	152.0 W	220-240 V/AC	D	**€ 439.95**
732097	Black	NW	28450 lm	202.0 W	220-240 V/AC	D	**€ 554.95**
732098	Black	NW	31800 lm	242.0 W	220-240 V/AC	D	**€ 624.95**
732102	Black	NW	39900 lm	302.0 W	100-240 V/AC	E	**€ 699.95**

IP65

5 Jahre Garantie

5-year guarantee
Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

page 586

display lights

ATIS

When it comes to illuminating signs, façades, billboards or images, display lights are the perfect choice. They are easy to install, exceptionally efficient and suit almost any environment thanks to their timeless design. With corresponding IP protection, they can also be used outdoors, purposefully providing an additional lighting source in such environments.

IP65

ATIS

·Rotatable and swivelling lamp head

Application Area
Object lighting / architecture, Advertising lighting

Housing	Aluminium
Colour Temperature	3000 K
Luminous Flux	1150 lm
Length	526 mm
Width	144 mm
Base Length	95 mm
Base Height	40 mm
Power	15 W

Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	100 Degree
Swivelling Angle	90 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	80



688020

Article	Housing Color		Price
688020	White	WW	**€ 229.95**
688021	Dark grey	WW	**€ 229.95**

IP65

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

SYSTEM LAUTARO

592 pendant lights

598 surface mounted ceiling lights

SYSTEM LAUTARO

page 594

page 595

page 596

page 597

page 598

LAUTARO

LAUTARO is a new luminaire series which, despite its enormous configuration options, has one thing in common has one thing in common: it is round or ring-shaped and has a surrounding LED ring. But that However, this is where the similarities end. All other product features can be selected, which is why LAUTARO is suitable for a wide range of commercial [and private] applications, including cafés, hotel lobbies, schools, stores and much more.

Is your desired variant not included in the standard range? Then simply configure your customised LAUTARO using our online configurator.

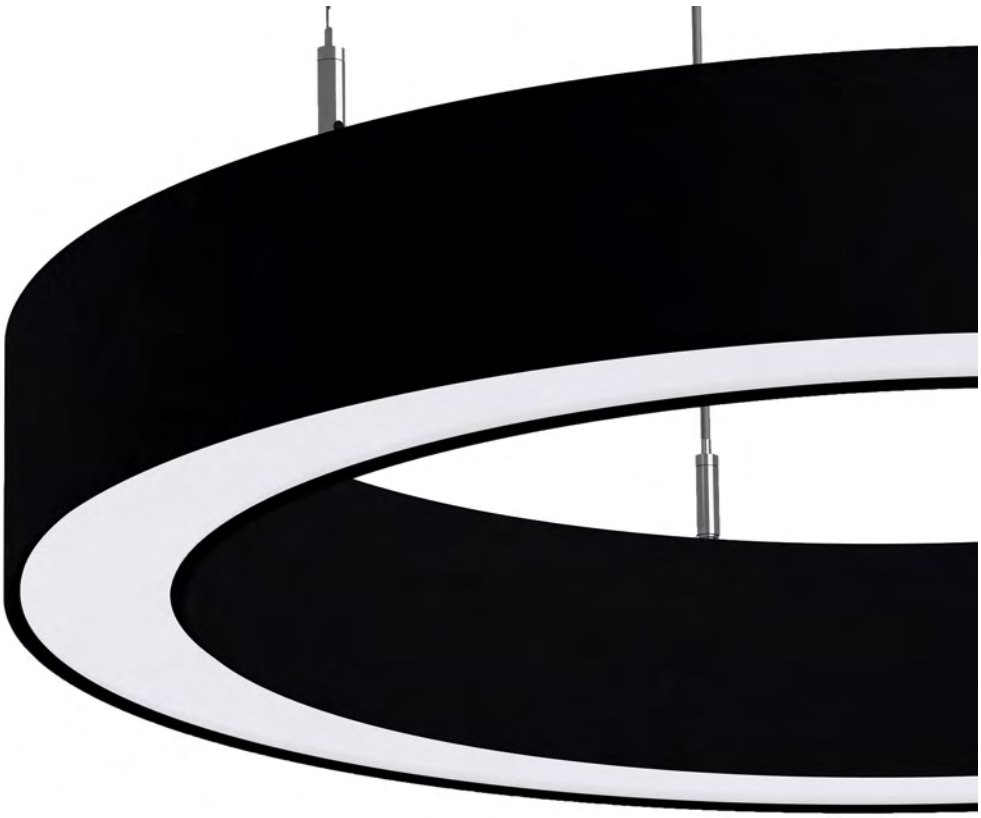

PLEASANT LIGHT ALL ROUND - YOUR BENEFITS AT A GLANCE:

- BEG-eligible [for approx. 50% of models]
- DALI dimmable thanks to integrated power supply unit
- emergency current capable
- through-wiring for simple series connection
- tool-free connection with spring terminals
- easy to install and maintain thanks to durable, easily replaceable components
- invisible screw connection for a clean appearance

1,080 VARIANTS AS STANDARD - SPECIAL DESIGNS ON REQUEST MODULAR SYSTEM FOR MAXIMUM DESIGN FREEDOM:

- three profile sizes: 60×40 / 80×55 / 100×80 mm
- three colours: RAL 9005 [black] / RAL 9006 [silver] / RAL 9016 [white]
- four diameters: 600 / 900 / 1,200 / 1,500 mm
- three light colors: 2,700 K / 3,000 K / 4,000 K
- surface-mounted luminaires for direct light
- pendant luminaires for direct or direct-indirect light [separately switchable and dimmable]
- custom-made products on request - e.g. individual sizes or RAL of your choice

LAUTARO 900/60 DOWN, SUSPENSION CENTRE

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	59 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Height	60 mm	CRI (Ra)	90
Ø	900 mm	IK Protection Class	IK05
Pendulum Length	3000 mm		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950216	Light gray	WW 2700 K	opal	5780 lm	**€ 919.95**
950217	Black	WW 2700 K	opal	5780 lm	**€ 919.95**
950218	White	WW 2700 K	opal	5780 lm	**€ 919.95**
950225	Light gray	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950226	Black	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950227	White	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950219	Light gray	WW 3000 K	opal	6370 lm	**€ 919.95**
950220	Black	WW 3000 K	opal	6370 lm	**€ 919.95**
950221	White	WW 3000 K	opal	6370 lm	**€ 919.95**
950228	Light gray	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950229	Black	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950230	White	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950222	Light gray	NW 4000 K	opal	7020 lm	**€ 919.95**
950223	Black	NW 4000 K	opal	7020 lm	**€ 919.95**
950224	White	NW 4000 K	opal	7020 lm	**€ 919.95**
950231	Light gray	NW 4000 K	microprismatic	7380 lm	**€ 949.95**
950232	Black	NW 4000 K	microprismatic	7380 lm	**€ 949.95**
950233	White	NW 4000 K	microprismatic	7380 lm	**€ 949.95**

IP20

NEW DALI IK05 Ra>90 SDCM<2

LAUTARO 900/60 DOWN, SUSPENSION PARALLEL

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	59 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Height	60 mm	CRI (Ra)	90
Ø	900 mm	IK Protection Class	IK05
Pendulum Length	3000 mm		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950234	Light gray	WW 2700 K	opal	5780 lm	**€ 919.95**
950235	Black	WW 2700 K	opal	5780 lm	**€ 919.95**
950236	White	WW 2700 K	opal	5780 lm	**€ 919.95**
950243	Light gray	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950244	Black	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950245	White	WW 2700 K	microprismatic	6200 lm	**€ 949.95**
950237	Light gray	WW 3000 K	opal	6370 lm	**€ 919.95**
950238	Black	WW 3000 K	opal	6370 lm	**€ 919.95**
950239	White	WW 3000 K	opal	6370 lm	**€ 919.95**
950246	Light gray	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950247	Black	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950248	White	WW 3000 K	microprismatic	6790 lm	**€ 949.95**
950240	Light gray	NW 4000 K	opal	7020 lm	**€ 919.95**
950241	Black	NW 4000 K	opal	7020 lm	**€ 919.95**
950242	White	NW 4000 K	opal	7020 lm	**€ 919.95**
950249	Light gray	NW 4000 K	microprismatic	7380 lm	**€ 949.95**
950250	Black	NW 4000 K	microprismatic	7380 lm	**€ 949.95**
950251	White	NW 4000 K	microprismatic	7380 lm	**€ 949.95**

IP20

LAUTARO 900/60 UP/DOWN, SUSPENSION CENTRE

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	83.5 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Height	60 mm	CRI (Ra)	90
Ø	900 mm	IK Protection Class	IK05
Pendulum Length	3000 mm		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950254	White	WW 2700 K	opal	7800 lm	**€ 1289.95**
950252	Light gray	WW 2700 K	opal	7800 lm	**€ 1289.95**
950253	Black	WW 2700 K	opal	7800 lm	**€ 1289.95**
950263	White	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950261	Light gray	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950262	Black	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950257	White	WW 3000 K	opal	8590 lm	**€ 1289.95**
950255	Light gray	WW 3000 K	opal	8590 lm	**€ 1289.95**
950256	Black	WW 3000 K	opal	8590 lm	**€ 1289.95**
950266	White	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950264	Light gray	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950265	Black	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950260	White	NW 4000 K	opal	9440 lm	**€ 1289.95**
950258	Light gray	NW 4000 K	opal	9440 lm	**€ 1289.95**
950259	Black	NW 4000 K	opal	9440 lm	**€ 1289.95**
950269	White	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**
950267	Light gray	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**
950268	Black	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**

IP20

NEW · DALI · IK05 · Ra>90 · SDCM<2

LAUTARO 900/60 UP/DOWN, SUSPENSION PARALLEL

- **DALI dimmable with integrated power supply**
- **continuous wiring possible**
- **tool-free connection with plug-in terminals**
- **easy to install / maintain**
- **long-lasting, easily replaceable components**
- **invisible screw connections**
- **customised designs available on request**

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Power Supply Unit incl.	Yes
Power	83.5 W	Light Beam Angle	90 Degree
Rated Input Voltage	198-264 V/AC	Control	DALI 2 / DT6, Push-Dim
Height	60 mm	CRI (Ra)	90
Ø	900 mm	IK Protection Class	IK05
Pendulum Length	3000 mm		

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950272	White	WW 2700 K	opal	7800 lm	**€ 1289.95**
950270	Light gray	WW 2700 K	opal	7800 lm	**€ 1289.95**
950271	Black	WW 2700 K	opal	7800 lm	**€ 1289.95**
950281	White	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950279	Light gray	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950280	Black	WW 2700 K	microprismatic	8330 lm	**€ 1299.95**
950275	White	WW 3000 K	opal	8590 lm	**€ 1289.95**
950273	Light gray	WW 3000 K	opal	8590 lm	**€ 1289.95**
950274	Black	WW 3000 K	opal	8590 lm	**€ 1289.95**
950284	White	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950282	Light gray	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950283	Black	WW 3000 K	microprismatic	9130 lm	**€ 1299.95**
950278	White	NW 4000 K	opal	9440 lm	**€ 1289.95**
950276	Light gray	NW 4000 K	opal	9440 lm	**€ 1289.95**
950277	Black	NW 4000 K	opal	9440 lm	**€ 1289.95**
950287	White	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**
950285	Light gray	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**
950286	Black	NW 4000 K	microprismatic	9940 lm	**€ 1299.95**

IP20

LAUTARO 900/60

Application Area
Reception / Communication, Object lighting / architecture, Corridor / stairwell, Office / conference, Shop / Retail / Sales area, Home / Living, Home office / study, Hotel / catering, Refurbishment, DIY store / discount store / supermarket / car dealership, Trade fair construction / shop fitting

Housing	Aluminium, Steel	Pendulum Length	3000 mm
Height	60 mm	Light Beam Angle	90 Degree
Ø	900 mm	Control	DALI 2 / DT6, Push-Dim
Power	59 W		
Rated Input Voltage	198-264 V/AC	CRI (Ra)	90
Power Supply Unit incl.	Yes	IK Protection Class	IK05

Article	Housing Color	Colour Temperature	Gloss level lens	Luminous Flux	Price
950918	Light gray	WW 2700 K	opal	5780 lm	**€ 819.95**
950919	Black	WW 2700 K	opal	5780 lm	**€ 819.95**
950920	White	WW 2700 K	opal	5780 lm	**€ 819.95**
950927	Light gray	WW 2700 K	microprismatic	6200 lm	**€ 849.95**
950928	Black	WW 2700 K	microprismatic	6200 lm	**€ 849.95**
950929	White	WW 2700 K	microprismatic	6200 lm	**€ 849.95**
950921	Light gray	WW 3000 K	opal	6370 lm	**€ 819.95**
950922	Black	WW 3000 K	opal	6370 lm	**€ 819.95**
950923	White	WW 3000 K	opal	6370 lm	**€ 819.95**
950930	Light gray	WW 3000 K	microprismatic	6790 lm	**€ 849.95**
950931	Black	WW 3000 K	microprismatic	6790 lm	**€ 849.95**
950932	White	WW 3000 K	microprismatic	6790 lm	**€ 849.95**
950924	Light gray	NW 4000 K	opal	7020 lm	**€ 819.95**
950925	Black	NW 4000 K	opal	7020 lm	**€ 819.95**
950926	White	NW 4000 K	opal	7020 lm	**€ 819.95**
950933	Light gray	NW 4000 K	microprismatic	7380 lm	**€ 849.95**
950934	Black	NW 4000 K	microprismatic	7380 lm	**€ 849.95**
950935	White	NW 4000 K	microprismatic	7380 lm	**€ 849.95**

IP20

SYSTEM PLANO

604 luminaire system

622 profile system



PLANO luminaire system



PLANO LUMINAIRE SYSTEM

Whether as a recessed version, surface-mounted ceiling luminaire or pendant luminaire as well as for wall mounting: the PLANO series is more than just another combination of profile and LED strip and is produced entirely in Europe.

The linear lighting solutions are based on four different profiles and can be configured individually. Thus, there are hardly any limits to the possible applications - whether in the office, in schools, in private living areas, in stores, showrooms and many more.

INDIVIDUAL SOLUTION

A PLANO profile luminaire always has the same design - and yet it is individual. Inside sits a profile with LED illumination in 2,700, 3,000 or 4,000 K. The surrounding luminaire body is made of extruded aluminum and has an anodized or powder-coated surface.
You can individually determine the length, equipment as well as the basic shape of the body, because the PLANO series is an individual lighting solution.

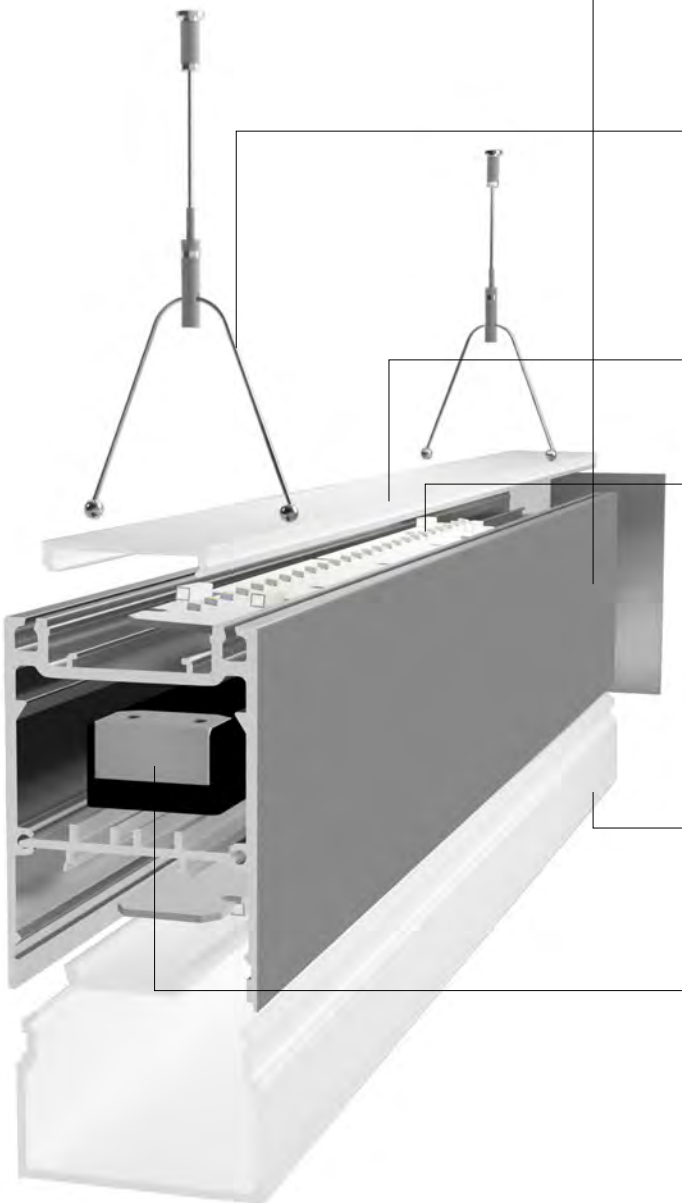

PROFIL
- colour
- length
- basic shape

ASSEMBLY
- installation
- built- in
- ceiling
- pendant
- wall

RADIATION DIRECTION
- up
- up / down

COLOUR TEMPERATURE
- 2700 K
- 3000 K
- 4000 K

COVER
- opal
- opal U
- microprismatic

CONTROL
- switchable
- DALI
- phase angle / section
- Casambi

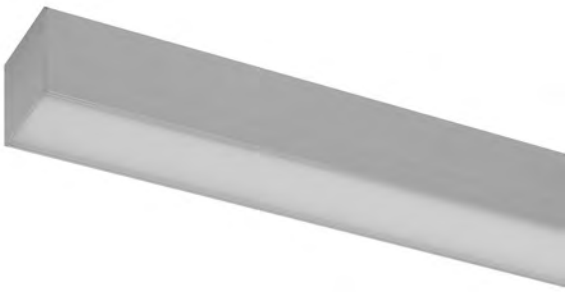

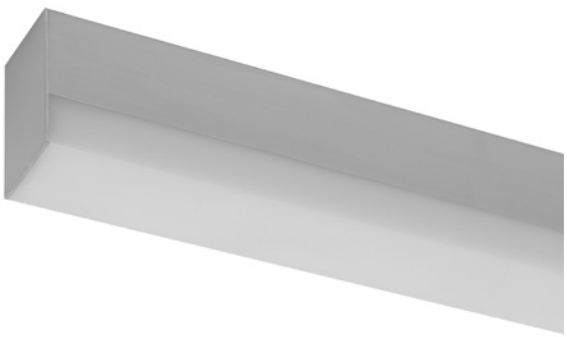

PLANO DS
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x		x	x	x	x	x	x	x	x

LED | Ra>90 | IP20

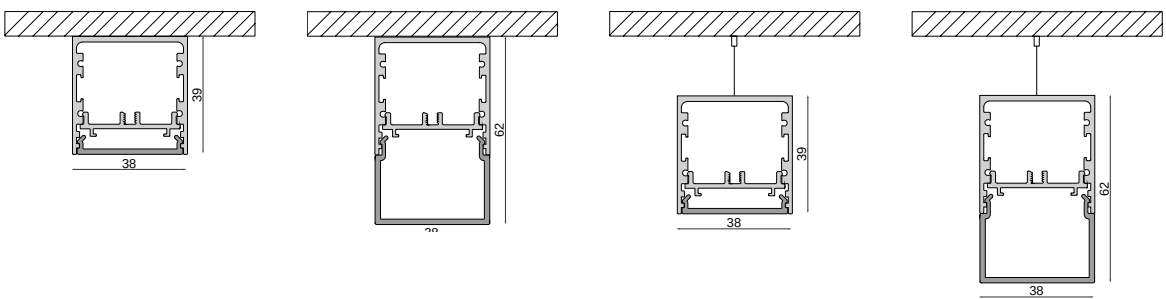

CONFIGURATION EXAMPLE

- DS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6827 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

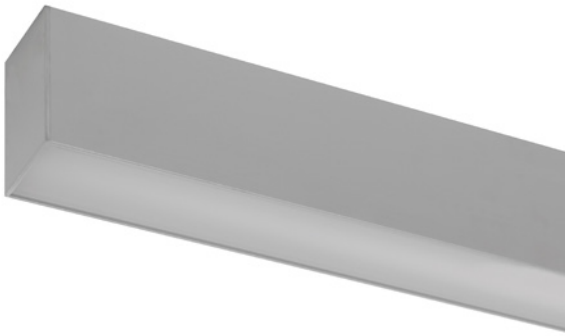

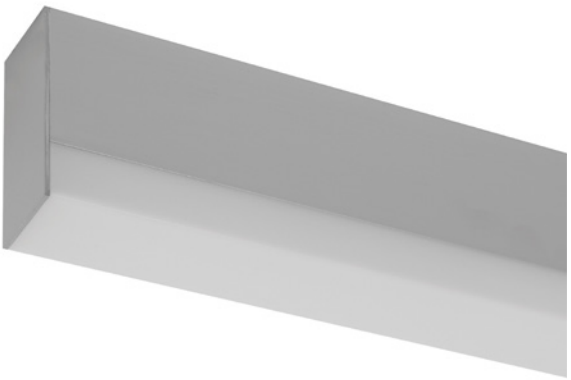

PLANO ES
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20

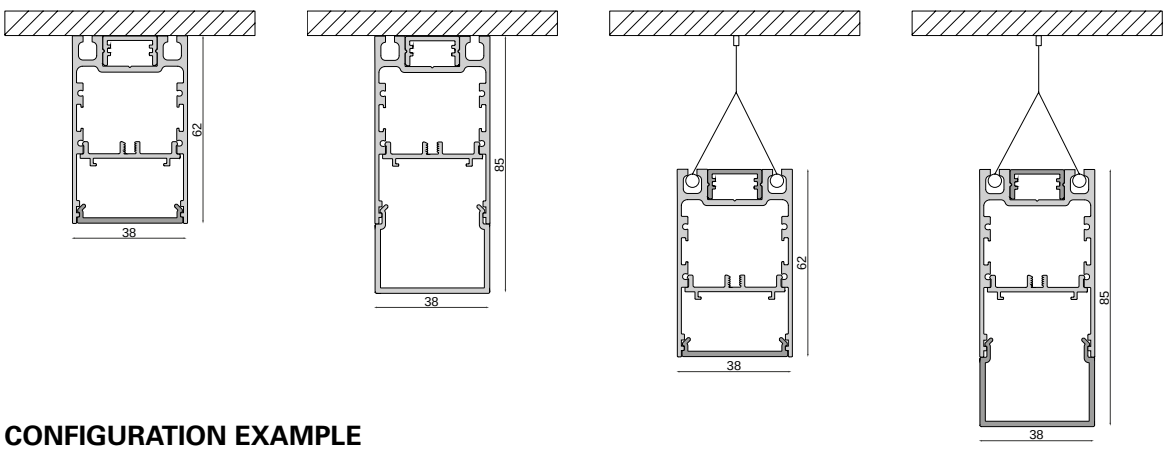

CONFIGURATION EXAMPLE

- ES surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 5425 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PRADA

HUGO

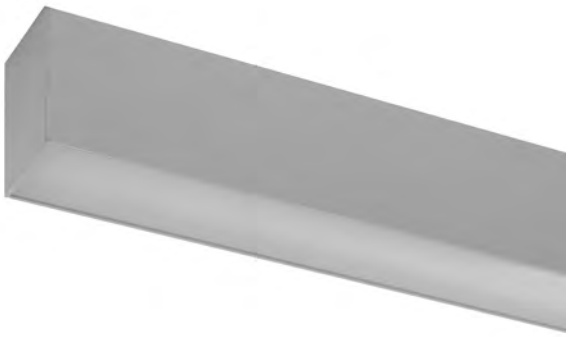

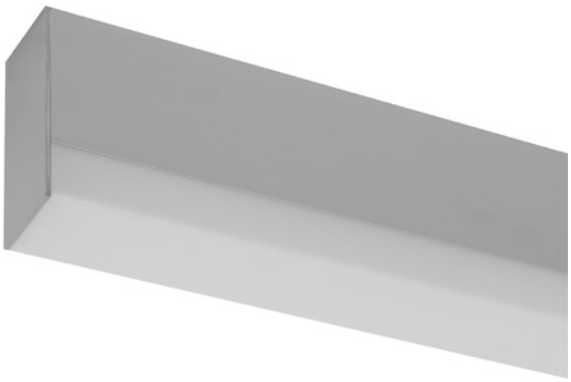

PLANO ES
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
		x		x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20



CONFIGURATION EXAMPLE

- ES wall-mounted luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and wall bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

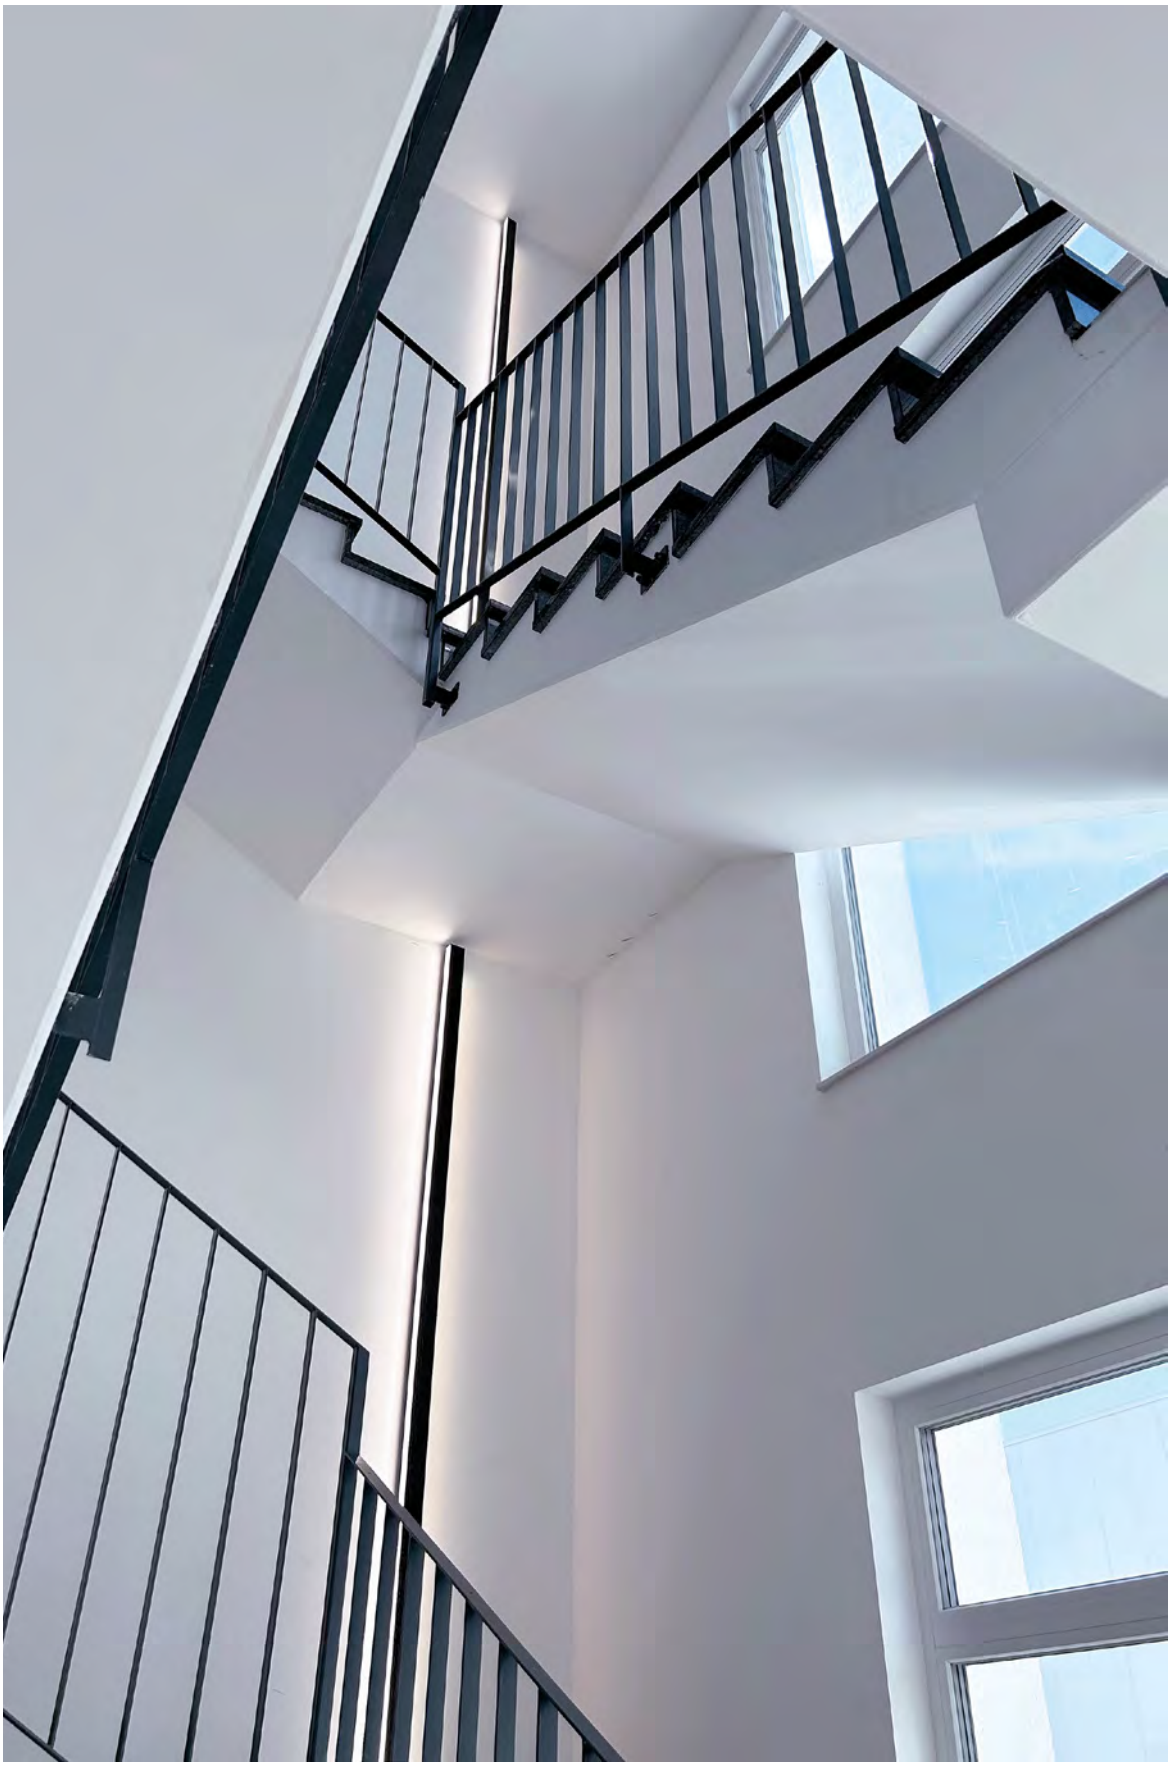

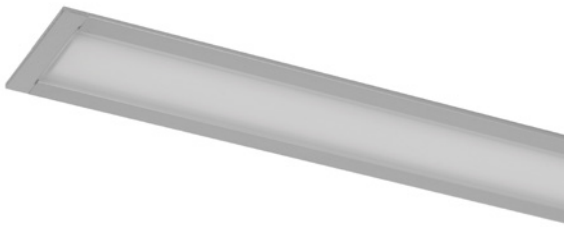

PLANO ES RECESSED LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
			x	x	x	x	x	x		x	x	x	x	x	x	x	x



CONFIGURATION EXAMPLE

- ES recessed ceiling luminaire | 2400 mm | black
- 97 W
- 3000 K | 7201 lm
- EVG | DALI
- incl. U-cover flat opal
- incl. end caps and mounting bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

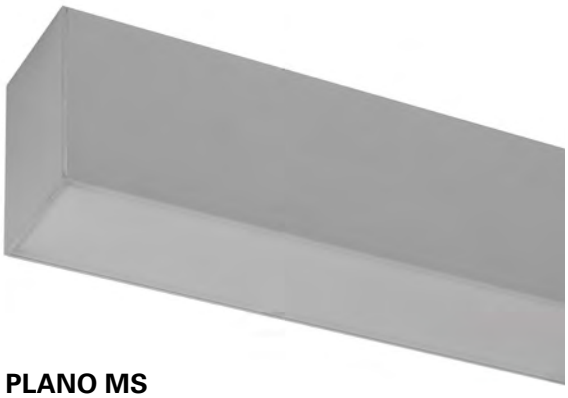

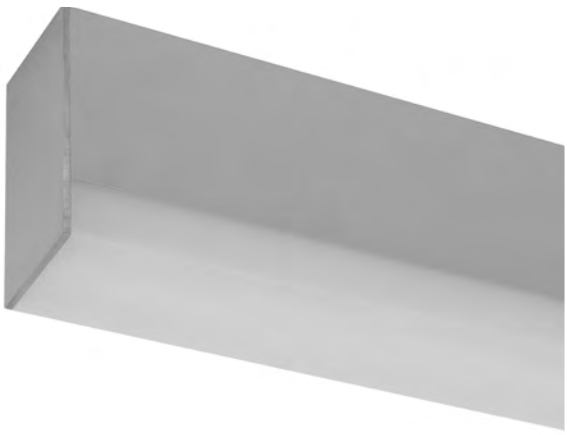

PLANO MS
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
x	x			x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20



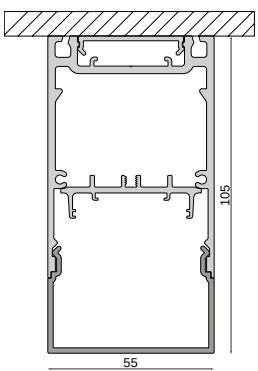

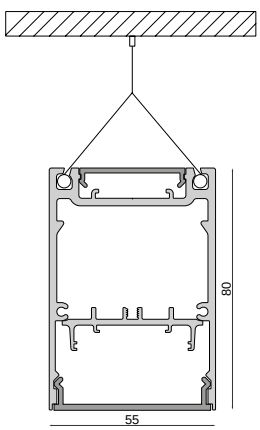

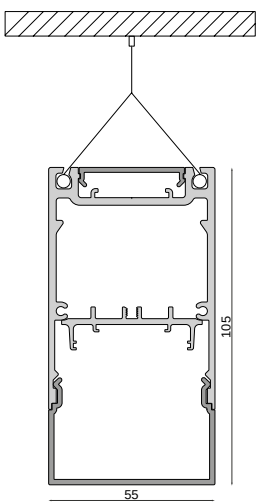

CONFIGURATION EXAMPLE

- MS surface-mounted luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PLANO MS RECESSED LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
			x	x	x	x	x	x		x	x	x	x	x	x	x	x

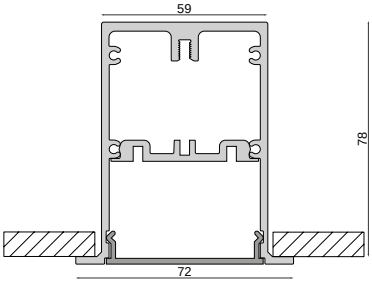

CONFIGURATION EXAMPLE

- MS recessed ceiling luminaire | 2400 mm | black
- 74 W
- 3000 K | 6990 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps and mounting bracket

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

PLANO BSH
LUMINAIRE SYSTEM

- aluminium die casting
- direct light

assembly				cover			length	radiation dir.		colour	colour temperature			control			
ceiling structure	pendulum	wall structure	ceiling mounting	opal	opal U	microprismatic	individual	down	up+down	individual	2700 K	3000 K	4000 K	switchable	DALI	phase angle/section	Casambi
		x		x	x	x	x	x	x	x	x	x	x	x	x	x	x

LED | Ra>90 | IP20

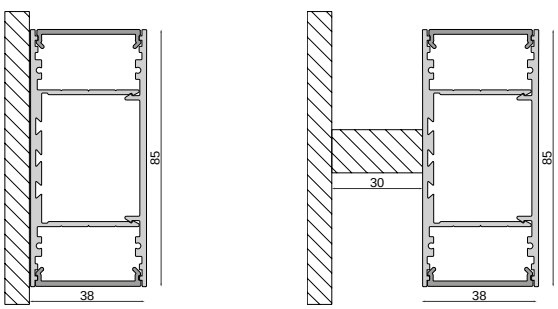

CONFIGURATION EXAMPLE

- BSH wall-mounted luminaire | 2400 mm | black
- 174 W,
- 3000 K | 10822 lm
- EVG | DALI
- incl. U-cover opal
- incl. end caps

price on demand

Of course, you can configure our PLANO system entirely according to your wishes and circumstances.

Foto: Visione.ch

page 622

page 623



page 624

PLANO profiles





NEW

PROFILE PLANO ES

- **universal light profile**
- **Uplight for LED strips up to 15 mm wide**
- **Downlight for LED strips up to 22 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970574	Black		2000 mm	**€ 129.95**
970576	White		2000 mm	**€ 189.95**
970575	Black		2500 mm	**€ 159.95**
970577	White		2500 mm	**€ 239.95**
970572	Aluminium	Anodised	2000 mm	**€ 129.95**
970573	Aluminium	Anodised	2500 mm	**€ 159.95**

Accessories

988111	Plano ES opal indirect cover, 2 m		**€ 24.95**
988112	Plano ES opal indirect cover, 2.5 m		**€ 29.95**
988201	PLANO ES longitudinal connector		**€ 9.95**
988204	PLANO ES corner connector		**€ 18.95**
988206	PLANO aluminium wall bracket		**€ 49.95**
988095	PLANO ES and MS - cable suspension set, in pairs		**€ 89.95**

Accessories for **970572**, **970573**

988092	PLANO ES end cap surface-mounted, aluminium anodised		**€ 24.95**
988114	PLANO ES end cap high surface-mounted, black		**€ 24.95**
988207	Plano ES and MS anodised aluminium uplight dummy cover		**€ 139.95**

Accessories for **970572**, **970574**, **970576**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m		**€ 39.95**
988088	PLANO ES and BSH high opal cover, 2 m		**€ 84.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m		**€ 69.95**

Accessories for **970573**, **970575**, **970577**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m		**€ 49.95**
988089	PLANO ES and BSH high opal cover, 2.5 m		**€ 104.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m		**€ 84.95**

Accessories for **970574**, **970575**

988093	PLANO ES end cap surface-mounted, black		**€ 24.95**
988115	PLANO glued laminated timber end cap high surface-mounted, aluminium anodised		**€ 39.95**
988208	Plano ES and MS black uplight dummy cover		**€ 99.90**

Accessories for **970576**, **970577**

988094	PLANO ES end cap surface-mounted, white		**€ 29.95**
988209	Plano ES and MS white uplight dummy cover		**€ 99.95**




NEW

PROFILE PLANO MS

- **universal light profile**
- **Uplight for LED strips up to 24 mm wide**
- **Downlight for LED strips up to 24 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970580	Black		2000 mm	**€ 274.95**
970582	White		2000 mm	**€ 339.95**
970581	Black		2500 mm	**€ 339.95**
970583	White		2500 mm	**€ 419.95**
970578	Aluminium	Anodised	2000 mm	**€ 274.95**
970579	Aluminium	Anodised	2500 mm	**€ 339.95**

Accessories

988109	PLANO MS end cap high surface-mounted, aluminium anodised		**€ 24.95**
988110	PLANO MS end cap high surface-mounted, black		**€ 24.95**
988200	PLANO MS longitudinal connector		**€ 9.95**
988203	PLANO MS corner connector		**€ 18.95**
988206	PLANO aluminium wall bracket		**€ 49.95**

Accessories for **970578**, **970579**

988102	PLANO MS end cap surface-mounted, aluminium anodised		**€ 24.95**
988207	Plano ES and MS anodised aluminium uplight dummy cover		**€ 139.95**
988210	Plano MS anodised aluminium downlight dummy cover		**€ 89.90**

Accessories for **970578**, **970580**, **970582**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m		**€ 39.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m		**€ 69.95**
988096	PLANO MS flat opal downlight cover, 2 m		**€ 49.95**
988098	PLANO MS high opal downlight cover, 2 m		**€ 99.95**
988100	PLANO MS flat microprism downlight cover, 2 m		**€ 69.95**

Accessories for **970579**, **970581**, **970583**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m		**€ 49.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m		**€ 84.95**
988097	PLANO MS flat opal downlight cover, 2.5 m		**€ 64.95**
988099	PLANO MS high opal downlight cover, 2.5 m		**€ 124.95**
988101	PLANO MS flat microprism downlight cover, 2.5 m		**€ 84.95**

Accessories for **970580**, **970581**

988103	PLANO MS end cap surface-mounted, black		**€ 29.95**
988208	Plano ES and MS black uplight dummy cover		**€ 99.90**
988211	Plano MS black downlight dummy cover		**€ 139.90**

Accessories for **970582**, **970583**

988095	PLANO ES and MS - cable suspension set, in pairs		**€ 89.95**
988104	PLANO MS end cap surface-mounted, white		**€ 29.95**
988209	Plano ES and MS white uplight dummy cover		**€ 99.95**
988212	Plano MS white downlight dummy cover		**€ 139.95**





NEW

PROFILE PLANO BSH

- **universal light profile**
- **Uplight for LED strips up to 31 mm wide**
- **Downlight for LED strips up to 31 mm wide**
- **incl. LED carrier**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970586	Black		2000 mm	**€ 199.95**
970588	White		2000 mm	**€ 199.95**
970587	Black		2500 mm	**€ 249.95**
970589	White		2500 mm	**€ 249.95**
970584	Aluminium	Anodised	2000 mm	**€ 139.95**
970585	Aluminium	Anodised	2500 mm	**€ 169.95**

Accessories

988202	PLANO BSH longitudinal connector		**€ 9.95**
988205	PLANO BSH corner connector		**€ 18.95**
988206	PLANO aluminium wall bracket		**€ 49.95**
988095	PLANO ES and MS - cable suspension set, in pairs		**€ 89.95**

Accessories for **970584**, **970585**

988106	PLANO glued laminated timber end cap surface-mounted, aluminium anodised		**€ 24.95**
988115	PLANO glued laminated timber end cap high surface-mounted, aluminium anodised		**€ 39.95**

Accessories for **970584**, **970586**, **970588**

988086	PLANO ES and BSH and MS flat opal uplight cover, 2 m		**€ 39.95**
988088	PLANO ES and BSH high opal cover, 2 m		**€ 84.95**
988090	PLANO ES and BSH and MS flat microprism uplight cover, 2 m		**€ 69.95**

Accessories for **970585**, **970587**, **970589**

988087	PLANO ES and BSH and MS flat opal uplight cover, 2.5 m		**€ 49.95**
988089	PLANO ES and BSH high opal cover, 2.5 m		**€ 104.95**
988091	PLANO ES and BSH and MS flat microprism uplight cover, 2.5 m		**€ 84.95**

Accessories for **970586**, **970587**

988107	PLANO glued laminated timber end cap surface-mounted, black		**€ 29.95**
988116	PLANO glued laminated timber end cap high surface-mounted, black		**€ 39.95**

Accessories for **970588**, **970589**

988108	PLANO glued laminated timber end cap surface-mounted, white		**€ 29.95**

SYSTEM COMBO

630 concrete profile

636 built-in profile

640 facade profile

644 insulation profile

646 click profile

COMBO profiles

page 634

page 635

page 638

page 639

page 642

page 643

page 645

page 645

page 648

page 649

page N/A

COMBO PROFILE SYSTEM – INSTALLATION-FRIENDLY PROFILE-IN-PROFILE SOLUTION

Facades, gardens, living spaces: The patented COMBO PROFILE SYSTEM lends every architectural design a distinctive character. The linear system solution can be integrated into all common building materials. The profile system not only creates perfect light lines in exposed concrete, concrete, brick, stone, plasterboard, thermal insulation, wood, or facade panels — the installation profiles CONCRETE, DRYWALL, FACADE, and INSULATION can also be quickly and cleanly installed by bricklayers, drywall or facade builders.

Equally important as the appearance is the fact that the lighting solutions can be easily integrated into the building structure even under challenging installation conditions. The lighting insert profile is simply clipped into the installation profiles after construction is completed.

MOUNTING / TRANSFORMER PROFILE CONCRETE

The mounting profile is installed during formwork construction and provides sufficient space for the luminaire profile as well as additional cabling. Optional plaster trim makes all work around the light line easier.
The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

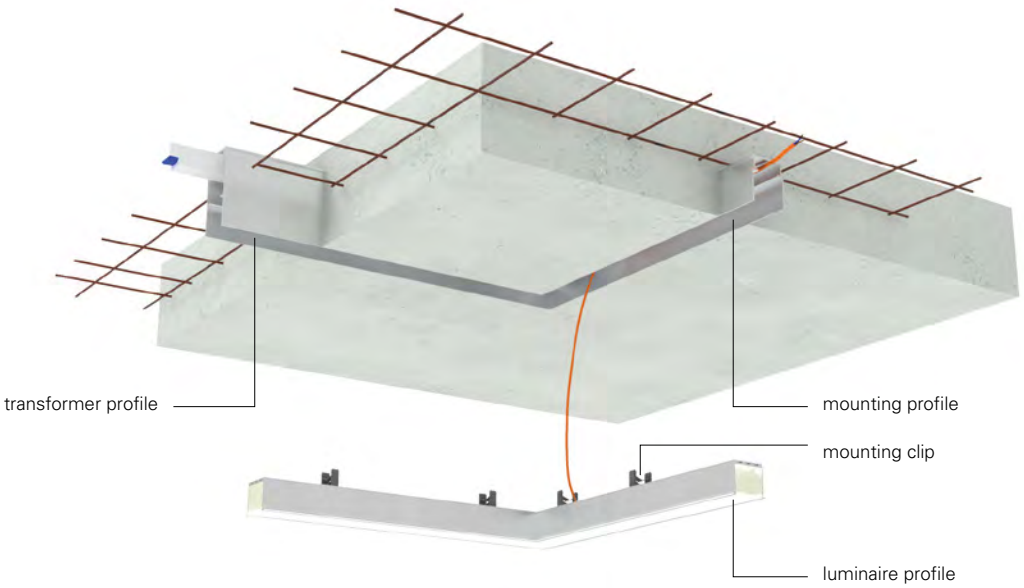

INSTALLATION INSTRUCTIONS CONCRETE

1. Planning of mounting / transformer profile

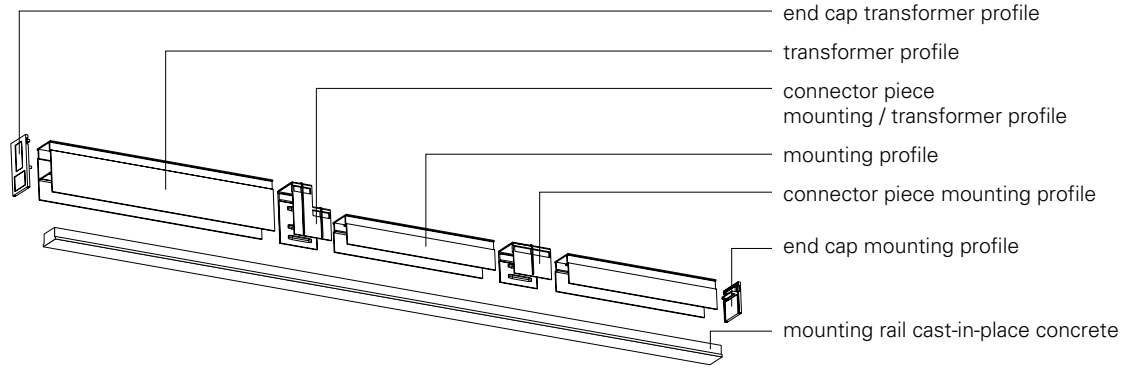

2. Installation, finishing work

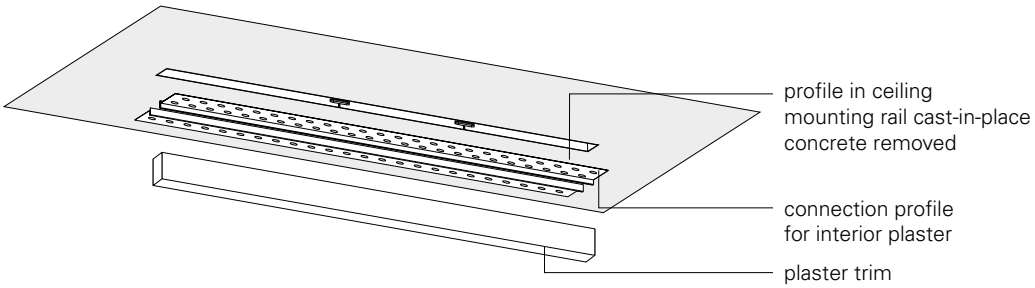

3. Installation of luminaire profile and power supply

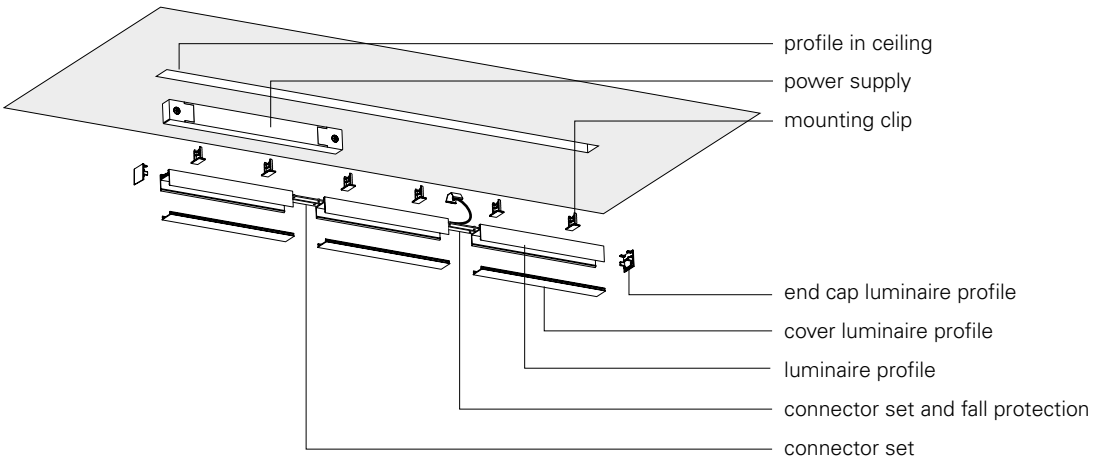

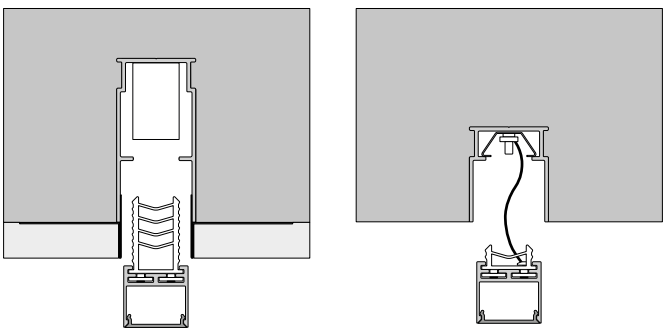

NEW



PROFILE, SERIES COMBO, CONCRETE, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970800	Black	2000 mm	**€ 114.95**
970801	White	2000 mm	**€ 114.95**
970802	Black	3000 mm	**€ 143.95**
970803	White	3000 mm	**€ 143.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
988167	Combo concrete mounting bar wood, 1 m	**€ 15.95**
988168	Combo concrete mounting bar wood, 2 m	**€ 31.95**
970811	Combo connection profile for indoor plastering, natural aluminium, 2.5 m	**€ 78.95**
970812	Combo connection profile for indoor plastering, white, 2.5 m	**€ 114.95**
970810	Combo connection profile for indoor plastering, black, 2.5 m	**€ 114.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
988133	Combo concrete end cap 2 pcs. mounting profile with edge covering, white	**€ 5.90**
988132	Combo concrete end cap 2 pcs. mounting profile with edge covering, black	**€ 5.90**
988165	Combo concrete connecting piece mounting profile, white	**€ 5.95**
988164	Combo concrete connecting piece mounting profile, black	**€ 5.95**
988161	Combo concrete connector and guard rail for concrete recessed profile	**€ 22.95**

NEW



PROFILE, SERIES COMBO, CONCRETE, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970804	Black	1000 mm	**€ 85.95**
970805	White	1000 mm	**€ 85.95**
970806	Black	2000 mm	**€ 172.95**
970807	White	2000 mm	**€ 172.95**
970808	Black	3000 mm	**€ 258.95**
970809	White	3000 mm	**€ 258.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
988167	Combo concrete mounting bar wood, 1 m	**€ 15.95**
988168	Combo concrete mounting bar wood, 2 m	**€ 31.95**
970811	Combo connection profile for indoor plastering, natural aluminium, 2.5 m	**€ 78.95**
970812	Combo connection profile for indoor plastering, white, 2.5 m	**€ 114.95**
970810	Combo connection profile for indoor plastering, black, 2.5 m	**€ 114.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
988135	Combo concrete end cap 2 pcs. transformer profile with edge covering, white	**€ 5.90**
988134	Combo concrete end cap 2 pcs. transformer profile with edge covering, black	**€ 5.90**
988163	Combo concrete connecting piece mounting profile - transformer profile, white	**€ 5.95**
988162	Combo concrete connecting piece mounting profile - transformer profile, black	**€ 5.95**

MOUNTING & TRANSFORMER PROFILE DRYWALL

The mounting profile can be neatly integrated on site and provides sufficient space for concealed cable routing – perfect for preparing light lines in drywall, plastered brick, thermal insulation, wood, fiberboard, etc. The luminaire profile is simply clipped in at the end.

For direct wall connection, the mounting flanges feature a predetermined breaking point for a clean separation. The transformer profile is used to house power supplies, allowing them to be concealed behind the luminaire in the case of long light lines or different circuit configurations.

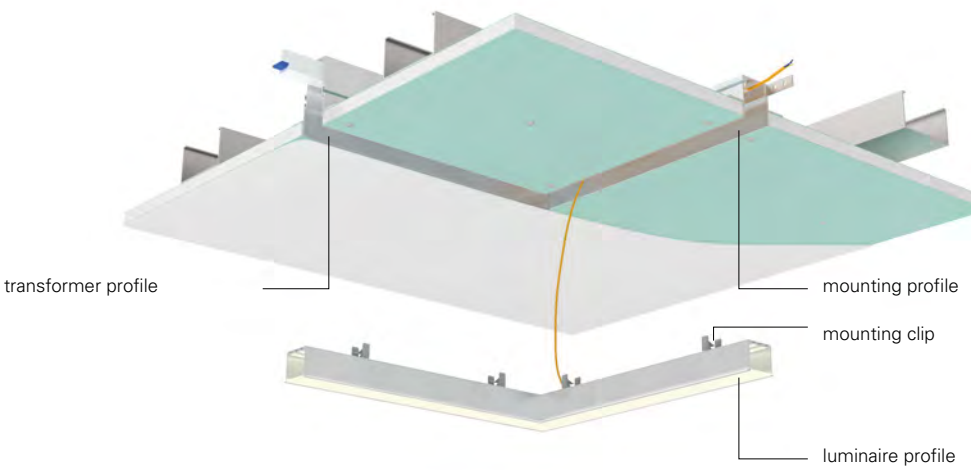

INSTALLATION INSTRUCTIONS BRICK, PLASTERBOARD, WOOD

1. Planning of mounting / transformer profile

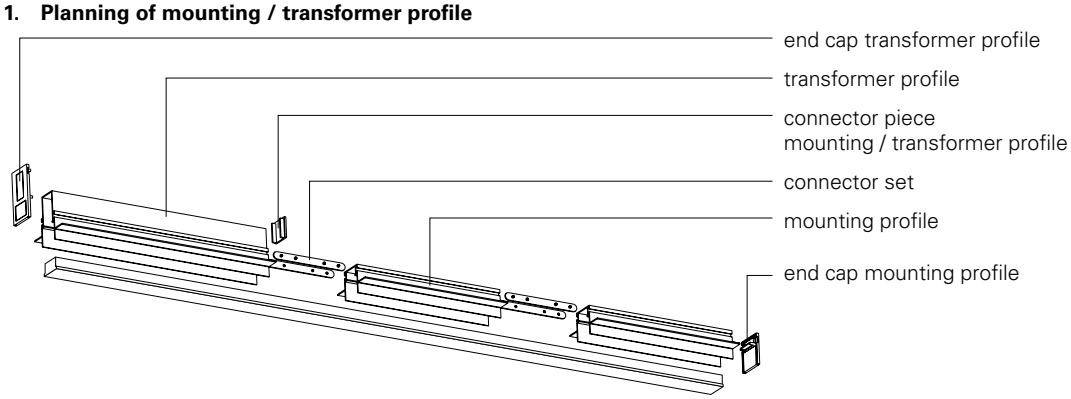

2. Installation, finishing work

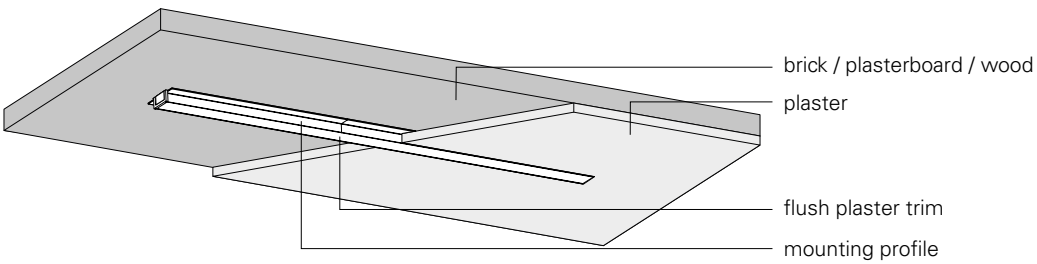

3. Installation of luminaire profile and power supply

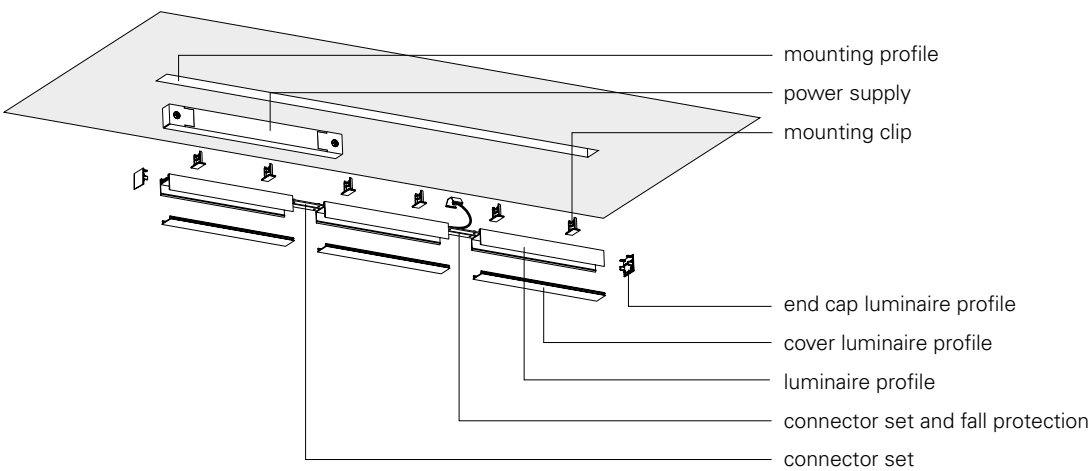

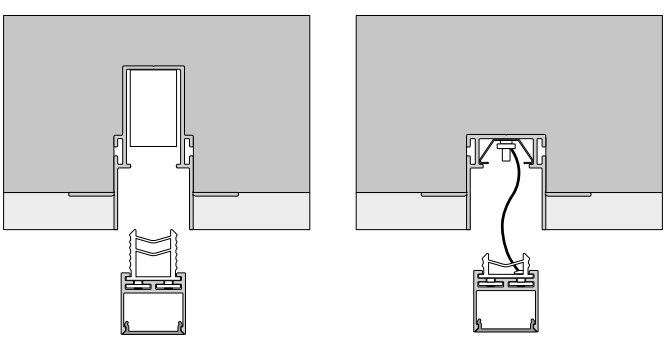

NEW



PROFILE, SERIES COMBO, BUILT-IN, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970820	Aluminium	1000 mm	**€ 39.95**
970821	Black	1000 mm	**€ 54.95**
970822	White	1000 mm	**€ 54.95**
970823	Aluminium	2000 mm	**€ 80.95**
970824	Black	2000 mm	**€ 108.95**
970825	White	2000 mm	**€ 108.95**
970826	Aluminium	3000 mm	**€ 120.95**
970827	Black	3000 mm	**€ 163.95**
970828	White	3000 mm	**€ 163.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
988174	Combo connector and fall protection	**€ 22.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988137	Combo built-in end cap 2 pcs. mounting profile without bar, white	**€ 5.90**
988136	Combo built-in end cap 2 pcs. mounting profile without bar, black	**€ 5.90**

NEW



PROFILE, SERIES COMBO, BUILT-IN, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970833	Aluminium	1000 mm	**€ 57.95**
970834	Black	1000 mm	**€ 107.95**
970835	White	1000 mm	**€ 107.95**
970836	Aluminium	2000 mm	**€ 114.95**
970837	Black	2000 mm	**€ 215.95**
970838	White	2000 mm	**€ 215.95**
970839	Aluminium	3000 mm	**€ 172.95**
970840	Black	3000 mm	**€ 273.95**
970841	White	3000 mm	**€ 273.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
988174	Combo connector and fall protection	**€ 22.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988141	Combo built-in end cap 2 pcs. transformer profile, white	**€ 5.90**
988138	Combo built-in end cap 2 pcs. transformer profile, black	**€ 5.90**
988140	Combo built-in end cap 2 pcs. connecting piece mounting- /transformer profile, white	**€ 5.90**
988139	Combo built-in end cap 2 pcs. connecting piece mounting- /transformer profile, black	**€ 5.90**

MOUNTING / TRANSFORMER PROFILE FACADE

The 3 mm mounting profile enables lighting solutions in areas with low installation height, such as Trespa or aluminium facade panels. Installation takes place behind the facade panel; any height difference of more than 3 mm can be adjusted during installation of the light profiles using the mounting clips. In combination with a thermal insulation connection profile CT, the 3 mm mounting profile can also be subsequently inserted into the insulation before plastering work. Thanks to the thermal and mechanical separation from the luminaire profile, cracks along the light line are avoided.
By adding the 3 mm transformer profile, users can—beyond the applications of the 3 mm mounting profile—also integrate the corresponding power supplies into the light line. This allows for on-site replacement if needed. The mechanical separation between the light and transformer profiles ensures that damage, especially on plastered facades, is prevented.

INSTALLATION INSTRUCTIONS INSULATION AND FACADE PANELS

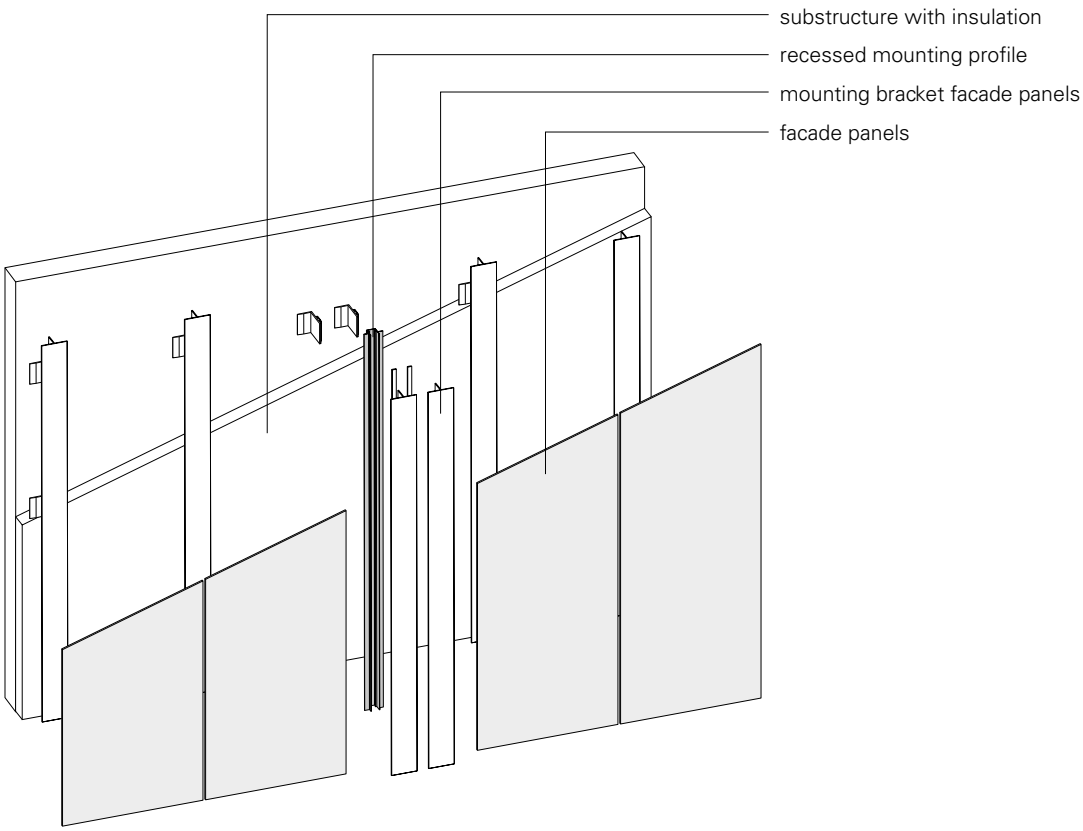

INSTALLATION INSTRUCTIONS INSULATION AND PLASTER

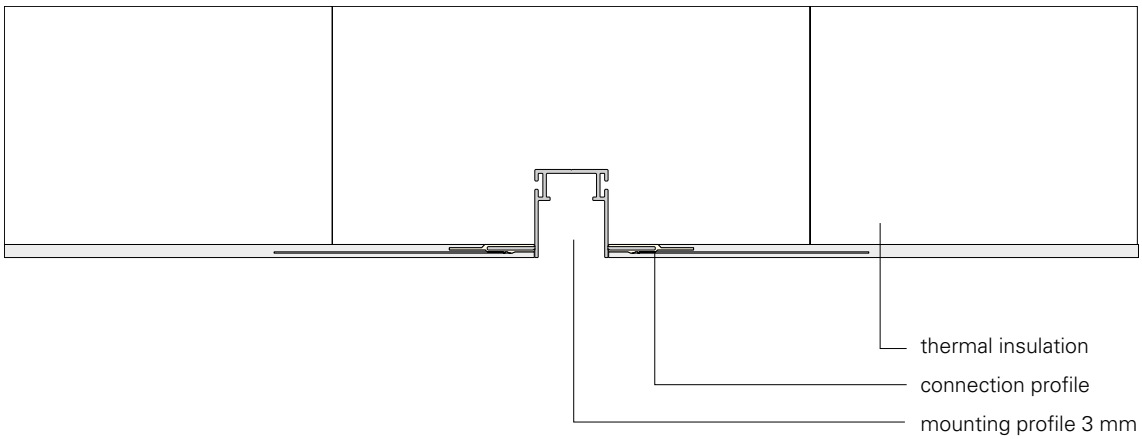

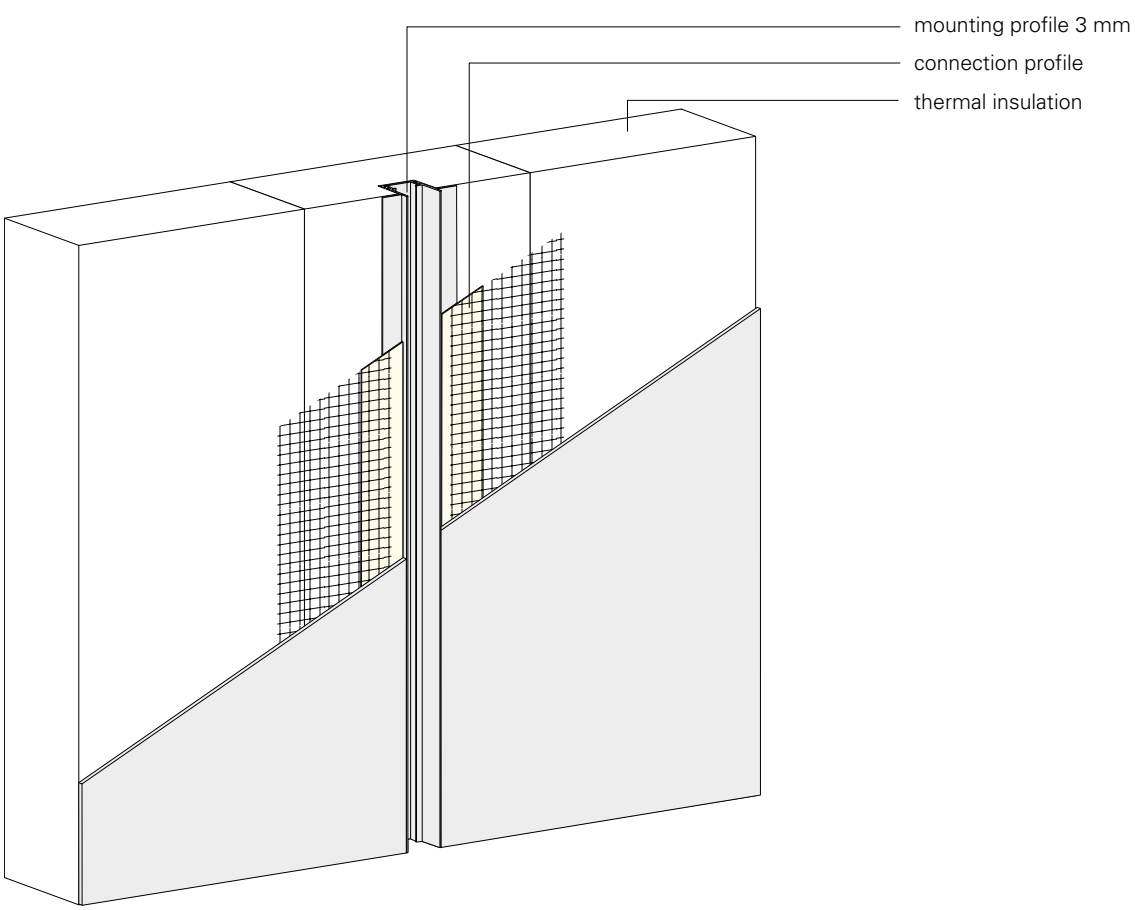

NEW



PROFILES, COMBO SERIES, FACADE, TRANSFORMER PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970869	Black	1000 mm	**€ 107.95**
970870	White	1000 mm	**€ 107.95**
970871	Black	2000 mm	**€ 215.95**
970872	White	2000 mm	**€ 215.95**

Accessories

970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
988136	Combo facade end cap 2 pcs. mounting profile without bar, black	**€ 5.90**
988137	Combo facade end cap 2 pcs. mounting profile without bar, white	**€ 5.90**
988138	Combo facade end cap 2 pcs. transformer profile, black	**€ 5.90**
988139	Combo facade end cap 2 pcs. connecting piece mounting / transformer profile, black	**€ 5.90**
988140	Combo facade end cap 2 pcs. connecting piece mounting / transformer profile, white	**€ 5.90**
988141	Combo facade end cap 2 pcs. transformer profile, white	**€ 5.90**
988169	Combo connection profile with fabric for levelling work, 3mm, 2m, orange	**€ 28.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988176	Combo connector set of 2 with angle joint 0/20-160°, natural aluminium	**€ 12.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**

NEW



PROFILES, COMBO SERIES, FAÇADE, MOUNTING PROFILE

Housing Aluminium

Article	Housing Color	Length	Price
970829	Black	2000 mm	**€ 108.95**
970830	White	2000 mm	**€ 108.95**
970831	Black	3000 mm	**€ 163.95**
970832	White	3000 mm	**€ 163.95**

Accessories

970814	Combo connection profile for filling jobs, natural aluminium, 2 m	**€ 13.95**
970816	Combo connection profile for filling jobs, black, 2 m	**€ 28.95**
970818	Combo connection profile for filling jobs, white, 2 m	**€ 28.95**
988136	Combo facade end cap 2 pcs. mounting profile without bar, black	**€ 5.90**
988137	Combo facade end cap 2 pcs. mounting profile without bar, white	**€ 5.90**
988138	Combo facade end cap 2 pcs. transformer profile, black	**€ 5.90**
988139	Combo facade end cap 2 pcs. connecting piece mounting / transformer profile, black	**€ 5.90**
988140	Combo facade end cap 2 pcs. connecting piece mounting / transformer profile, white	**€ 5.90**
988141	Combo facade end cap 2 pcs. transformer profile, white	**€ 5.90**
988169	Combo connection profile with fabric for levelling work, 3mm, 2m, orange	**€ 28.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988176	Combo connector set of 2 with angle joint 0/20-160°, natural aluminium	**€ 12.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988179	Combo plaster moulding - plaster edge, polystyrene 40x29x1000, white	**€ 8.95**
988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**

MOUNTING / TRANSFORMER PROFILE INSULATION

The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished. The mounting profile allows for easy installation of recessed profiles into thermal insulation and can be equipped with all profiles after the surface has been finished.

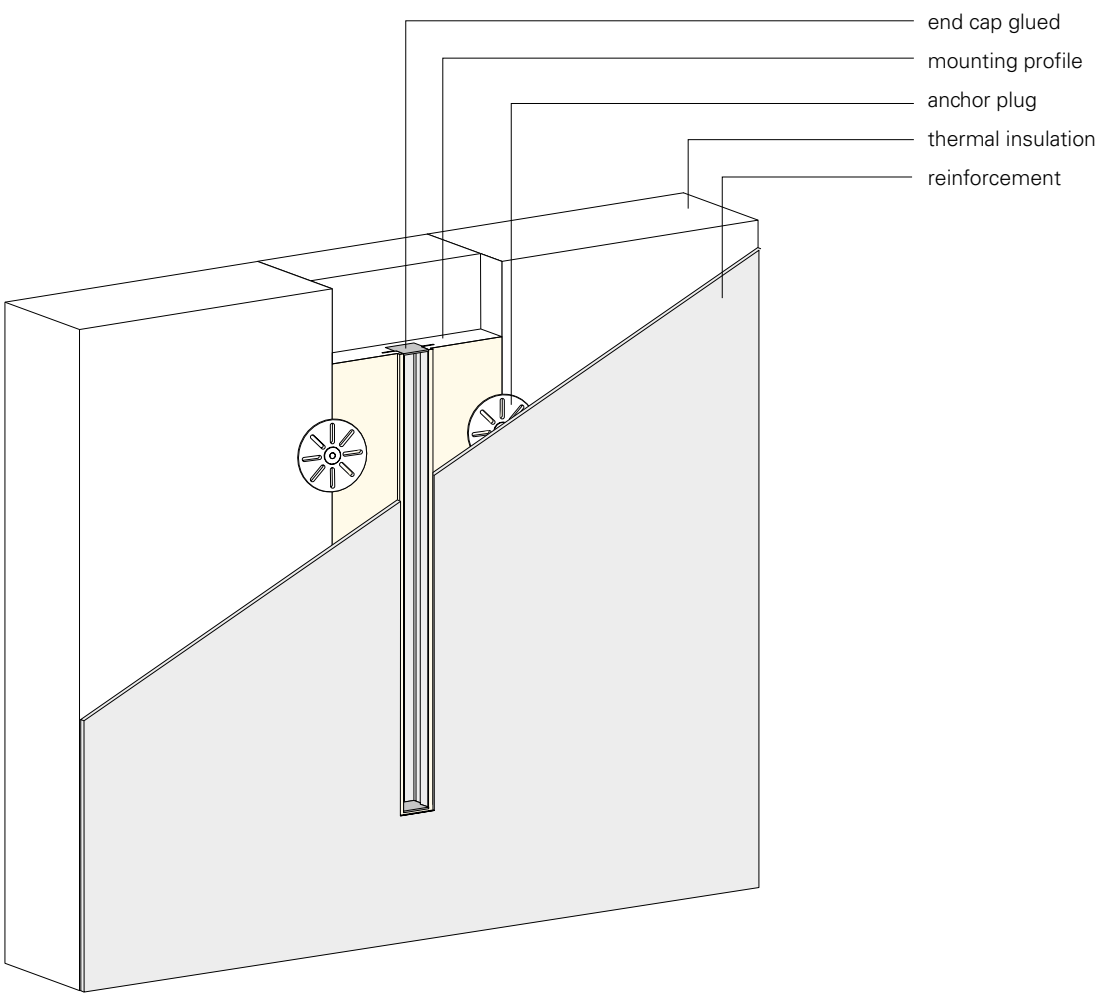

NEW

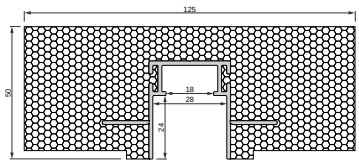

COMBO SERIES, INSULATION, MOUNTING PROFILE

Housing EPS Length 2000 mm

Article	Housing Color	Price
988170	Black	**€ 503.95**
988171	White	**€ 503.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988137	Combo insulation end cap 2 pcs. mounting profile without bar, white	**€ 5.90**
988136	Combo insulation end cap 2 pcs. mounting profile without bar, black	**€ 5.90**

NEW

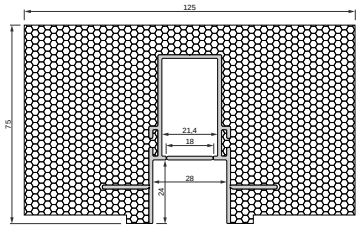

COMBO SERIES, INSULATION, TRANSFORMER PROFILE

Housing EPS Length 1000 mm

Article	Housing Color	Price
988172	Black	**€ 273.95**
988173	White	**€ 273.95**

Accessories

988180	Combo plaster moulding - flush, polystyrene 24x29x1000, white	**€ 8.95**
988178	Combo connector set 2 pcs. 0/90, natural aluminium	**€ 11.95**
988175	Combo connector set 2 pcs. 90/0, natural aluminium	**€ 11.95**
988177	Combo connector set 2 pcs. 0/0, natural aluminium	**€ 11.95**
988141	Combo insulation end cap 2 pcs. transformer profile, white	**€ 5.90**
988138	Combo insulation end cap 2 pcs. transformer profile, black	**€ 5.90**
988140	Combo insulation end cap 2 pcs. connecting piece mounting / transformer profile, white	**€ 5.90**
988139	Combo insulation end cap 2 pcs. connecting piece mounting / transformer profile, black	**€ 5.90**

LUMINAIRE PROFILE

To complete your light lines within the various transformer and mounting profiles, the extensive range of accessories leaves nothing to be desired. Tools such as connectors with fall protection or cable holders significantly simplify installation. Depending on the nature of the transition to the mounting / transformer profile, you can cover it using the LT-0-20 or accentuate the resulting shadow gap with the LU-02-20. As a general rule, all luminaire profiles should be connected using connectors to prevent mechanical stress on the LED strips caused by differing expansion.

INSTALLATION INSTRUCTIONS LUMINAIRE PROFILE

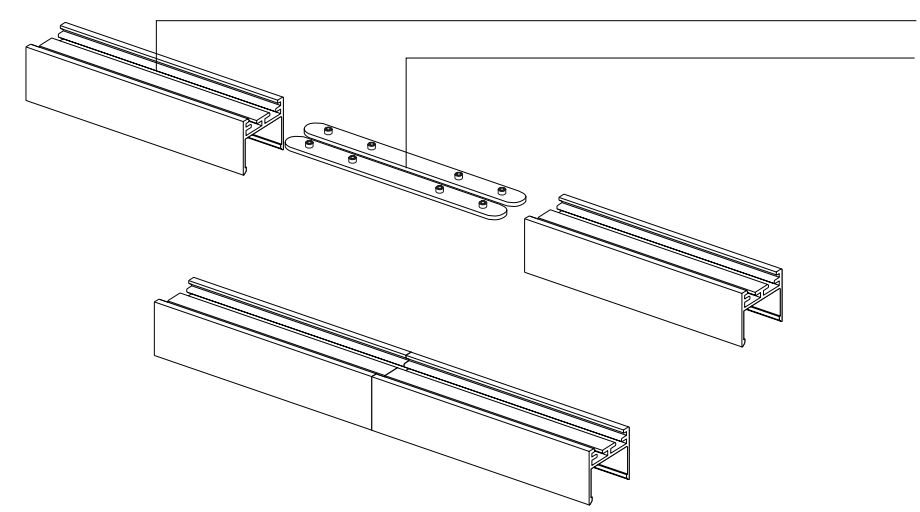

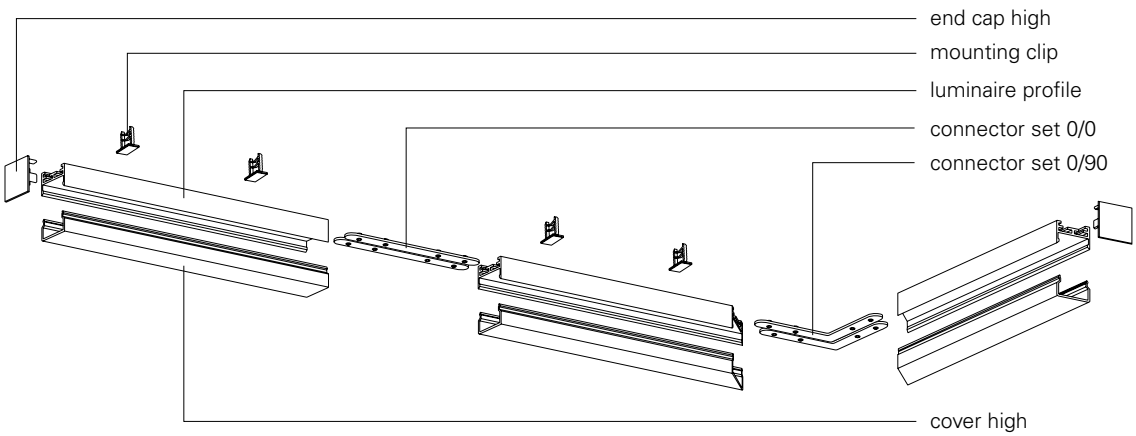

NEW

PROFILE, SERIES COMBO, CLICK U-PROFILE

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970848	White		1000 mm	**€ 34.95**
970842	Silver	Anodised	1000 mm	**€ 31.95**
970845	Black		1000 mm	**€ 34.95**
970849	White		2000 mm	**€ 68.95**
970843	Silver	Anodised	2000 mm	**€ 62.95**
970846	Black		2000 mm	**€ 68.95**
970850	White		3000 mm	**€ 103.95**
970844	Silver	Anodised	3000 mm	**€ 94.95**
970847	Black		3000 mm	**€ 103.95**

Accessories

988184	Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue	**€ 29.50**
988185	Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black	**€ 29.50**
988186	Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow	**€ 29.50**
988126	Combo cover, H-02-20, high, milky, 1 m	**€ 18.95**
988127	Combo cover, H-02-20, high, milky, 2 m	**€ 36.95**
988128	Combo cover, H-02-20, high, milky, 3 m	**€ 55.95**
988122	Combo cover, B-02-20, wide, milky, 1 m	**€ 14.95**
988120	Combo cover, B-02-20, wide, milky, 2 m	**€ 28.95**
988121	Combo cover, B-02-20, wide, milky, 3 m	**€ 42.95**
988123	Combo click cover V4-HL-25 opal, 1 m	**€ 11.95**
988124	Combo click cover V4-HL-25 opal, 2 m	**€ 22.95**
988125	Combo click cover V4-HL-25 opal, 3 m	**€ 34.95**
988148	Combo end cap 2 pcs. U-light profile, P-LU-02-20, grey	**€ 5.90**
988146	Combo end cap 2 pcs. U-light profile, P-LU-02-20, white	**€ 5.90**
988145	Combo end cap 2 pcs. U-light profile, P-LU-02-20, black	**€ 5.90**
988147	Combo end cap 2 pcs. U-light profile, B-LU-02-20, white	**€ 13.90**
988142	Combo end cap 2 pcs. U-light profile, H-LU-02-20, grey	**€ 7.90**
988144	Combo end cap 2 pcs. U-light profile, H-LU-02-20, white	**€ 7.90**
988143	Combo end cap 2 pcs. U-light profile, H-LU-02-20, black	**€ 7.90**

NEW



PROFILE, SERIES COMBO, CLICK T-PROFILE

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970866	White		1000 mm	**€ 39.95**
970860	Silver	Anodised	1000 mm	**€ 35.95**
970863	Black		1000 mm	**€ 39.95**
970867	White		2000 mm	**€ 80.95**
970861	Silver	Anodised	2000 mm	**€ 71.95**
970864	Black		2000 mm	**€ 80.95**
970868	White		3000 mm	**€ 120.95**
970862	Silver	Anodised	3000 mm	**€ 107.95**
970865	Black		3000 mm	**€ 120.95**

Accessories

988184	Combo set 10 pcs. Mounting clip, height-adjustable V1, 10mm, blue	**€ 29.50**
988185	Combo set 10 pcs. Mounting clip, height-adjustable V2, 10mm, black	**€ 29.50**
988186	Combo set 10 pcs. Mounting clip, height-adjustable V3, 10mm, yellow	**€ 29.50**
988122	Combo cover, B-02-20, wide, milky, 1 m	**€ 14.95**
988120	Combo cover, B-02-20, wide, milky, 2 m	**€ 28.95**
988121	Combo cover, B-02-20, wide, milky, 3 m	**€ 42.95**
988123	Combo click cover V4-HL-25 opal, 1 m	**€ 11.95**
988124	Combo click cover V4-HL-25 opal, 2 m	**€ 22.95**
988125	Combo click cover V4-HL-25 opal, 3 m	**€ 34.95**
988126	Combo cover, H-02-20, high, milky, 1 m	**€ 18.95**
988127	Combo cover, H-02-20, high, milky, 2 m	**€ 36.95**
988128	Combo cover, H-02-20, high, milky, 3 m	**€ 55.95**
988158	Combo end cap 2 pcs. T-light profile, P-LT-02-20, grey	**€ 7.90**
988160	Combo end cap 2 pcs. T-light profile, P-LT-02-20, white	**€ 7.90**
988159	Combo end cap 2 pcs. T-light profile, P-LT-02-20, black	**€ 7.90**
988155	Combo end cap 2 pcs. T-light profile, H-LT-02-20, grey	**€ 7.90**
988157	Combo end cap 2 pcs. T-light profile, H-LT-02-20, white	**€ 7.90**
988156	Combo end cap 2 pcs. T-light profile, H-LT-02-20, black	**€ 7.90**
988198	Plano click/flat/hinge wing recessed mounting spring set (2 pieces)	**€ 3.95**

ALUMINIUM PROFILES

652 linear light in 5 steps
656 assembly
658 homogeneous light image
660 U-profiles - flat + high - built-in / built-on
684 T-profiles - flat + high - built in
702 H- and groove-profiles
710 step/plinth/angle/corner-profiles - built-in/built-on
734 dry construction profiles
754 tile profiles
770 profiles for outdoor usw - walkable/trafficable

LINEAR LIGHT IN 5 STEPS

STEP BY STEP TO BECOMING A LINEAR LIGHT PROFESSIONAL!

It has never been quicker and easier to put together an individually and perfectly coordinated linear light in max. 5 steps. Test how quickly and easily you can put your personal project into practice.

1

CHOOSE YOUR PROFILE

Whether for indoor or outdoor use, for wide or narrow LED stripes, whether the profile is to be should be low or high. Matching to this you can choose between different shapes and light transmittance of the covers.

2

CHOOSE THE RIGHT LED STRIPE

You can choose between strips for indoor or outdoor use, with one or more light colours, high-power strips for basic lighting or fewer lumens for ambient lighting. Various cut sizes and LED spacing also perfectly round off our range here.

3

SELECT THE REQUIRED POWER SUPPLY

In addition to the various protection classes for the respective place of use and voltages, you can choose from different designs and power classes. Our range is complemented by power supplies that can be dimmed directly or controlled via Dali, KNX or 1-10V.

4

DO YOU NEED A CONTROLLER TO STEER?
In this category, you can select the appropriate control controller or LED dimmer according to requirements and customer wishes. Whether control via radio, smartphone, DMX, Dali, etc. – almost no [control] wishes remain unfulfilled!

5

ACCESSORIES, MOUNTING MATERIAL & CO
In the last step, you will find everything that makes installation easier, faster and more comfortable and gives the linear desired light a perfect finish.

aluminium profiles

page 662

page 684

page 704

page 706

page 708

page 712

page 716

page 718

page 720

page 724

page 726

page 728

page 736

page 738

page 740

page 742

page 744

page 746

page 748

page 750

page 752

page 756

page 758

page 760

page 762

page 766

page 772

page 774

page 776

page 778

page 780

ASSEMBLY FOR PROFILES AND STRIPES

We provide our products individually made to measure on request.
You will receive the prices on request.

989100 – **service package I** – profile cut

profile is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989105 – **drill hole end cap / profile**

hole for cable outlet in end cap or profile

989200 – **service package II** – cover cut

cover is shortened to desired length, tolerance ± 1 mm | sawing loss 4 mm

989300 – **service package III** – stripe cut

LED stripe is adapted to desired length, taking into account segment and maximum total length, including soldering of a cable lead of the desired length and open, tinned wire ends

989305 – **cable** – connecting cable / cores 1 channel
989310 – **cable** – connecting cable / cores 2 channel
989315 – **cable** – connecting cable / cores 3 + 4 channel
989320 – **cable** – mini cable / cores 1 - 4 channel
989325 – **cable** – connecting cable / cores 5 channel

989301 – **2nd connecting cable**

attachment of a 2nd connecting cable / cores for further connection with open tinned wire ends

989302 – **connecting cable**

attaching / soldering a fixed connection line / cores between 2 stripe pieces
[max. 1m connection line / cores incl., a longer connection will be charged by the metre]
original length and max. total length of the strip to be operated may not be exceeded by sections be exceeded

989350 – **IP surcharge** – sealing stripe

sealing a shortened IP stripe / gluing an end cap

989400 – **service package IV** – complete assembly

bringing together and assembling all components into a finished luminaire
incl. function test and cable flag
[for desired length, please add 2cm to the cut length of the LED stripe segment for connection space, length tolerance +/- 2mm]

HOMOGENEOUS LIGHT IMAGE

How to achieve a homogeneous light image
In combination with a milky 40% cover and a matching LED stripe, a homogeneous light image can be created. The distance [pixel pitch] between the LEDs and the cover is decisive.

The rule of thumb here is:
The distance between the LEDs should be smaller than the distance between the LEDs and the cover.

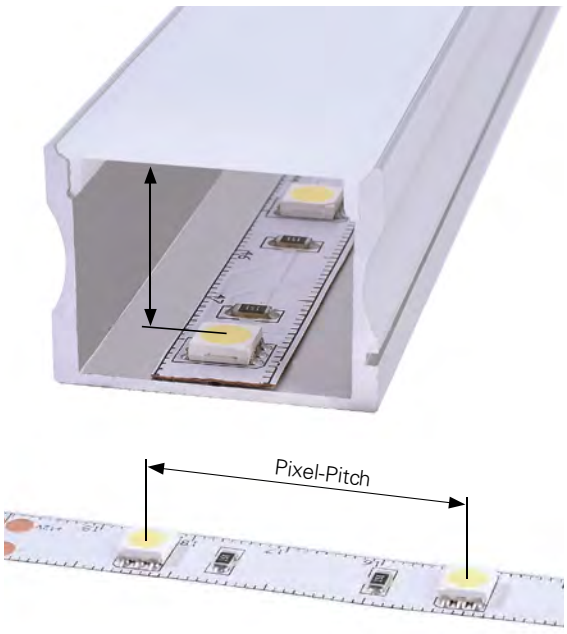

PROFILE DESCRIPTION

mounting type: A = built-on
E = built-in

Width of the series [10 profile] / of the matching LED stripe

AU - 01 - 10

basic form

series

TRANSLUCENCY / LIGHT TRANSMISSION

95% clear | 75% mat | 40% milky

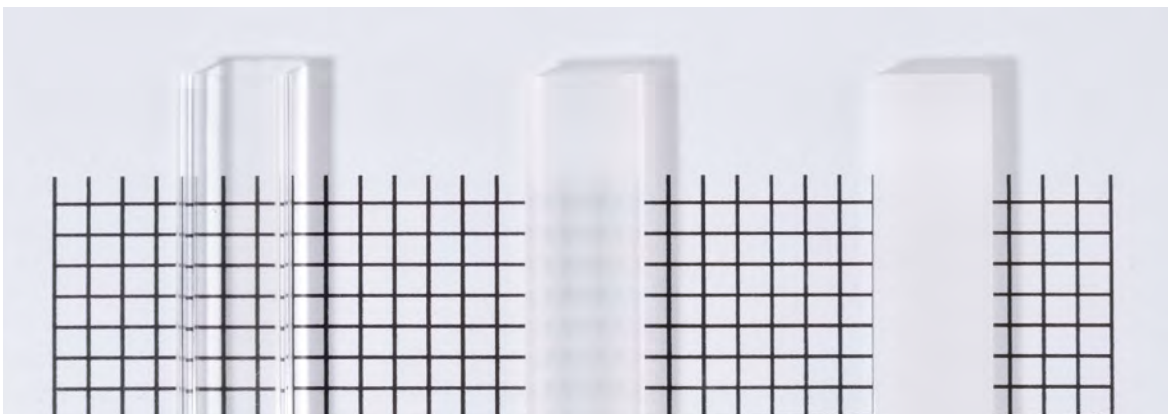

Illustration of various LED stripes with different pixel pitches in combination with three different light transmittances in the covers. This small selection clearly illustrates the optical differences of some LED stripes in combination with different covers.

120 LED/m
cutting option 50 mm / 6 LED

240 LED/m
cutting option 25 mm / 6 LED

700LED/m
cutting option 10 mm / 7 LED

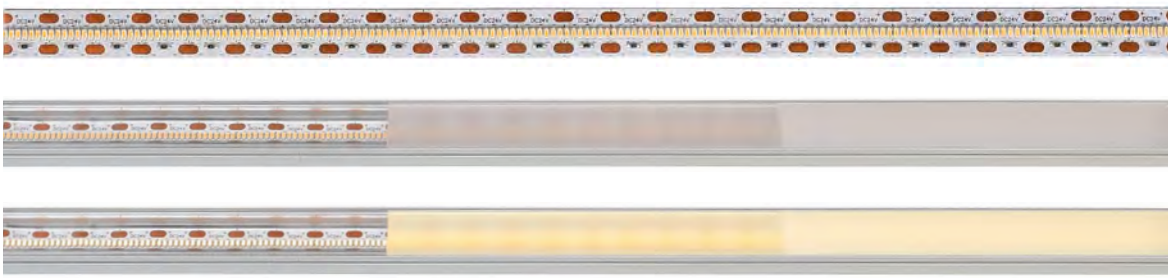

COB 480 LED/m
cutting option 50 mm / 24 LED

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

U- AND T-PROFILES

The profiles of these series are available in various designs.
Thanks to their universal profile shape, they can be used flexibly in almost all areas. Thanks to their profile construction, they are ideally suited for the cover cut edges.

AU-01-05

· for LED strips up to 5.7 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
970081	Silver	Matt / Anodised	**€ 17.95**
970085	White	Matt / Powder-coated	**€ 15.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
2 m	**983551**	**983555**	**€ 11.95**
3 m		**983556**	**€ 18.95**
2 m		**984055**	**€ 11.95**
2 m		**984555**	**€ 11.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978660	**978661**	**978662**
		
979160	**979161**	**979162**
		
979660	**979661**	**979662**

AU-02-05

· for LED strips up to 5.7 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970180	Silver	Matt / Anodised	1000 mm	**€ 9.95**
970181	Silver	Matt / Anodised	2000 mm	**€ 18.95**
970183	Black	Matt / Anodised	2000 mm	**€ 18.95**
970185	White	Matt / Powder-coated	2000 mm	**€ 18.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
1 m	**983550**	**983554**	**€ 5.95**
2 m	**983551**	**983555**	**€ 11.95**
3 m		**983556**	**€ 18.95**
2 m		**984055**	**€ 11.95**
1 m		**984554**	**€ 5.95**
2 m		**984555**	**€ 11.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
978670	**978671**	**978672**
979170	**979171**	**979172**
		
979670	**979671**	

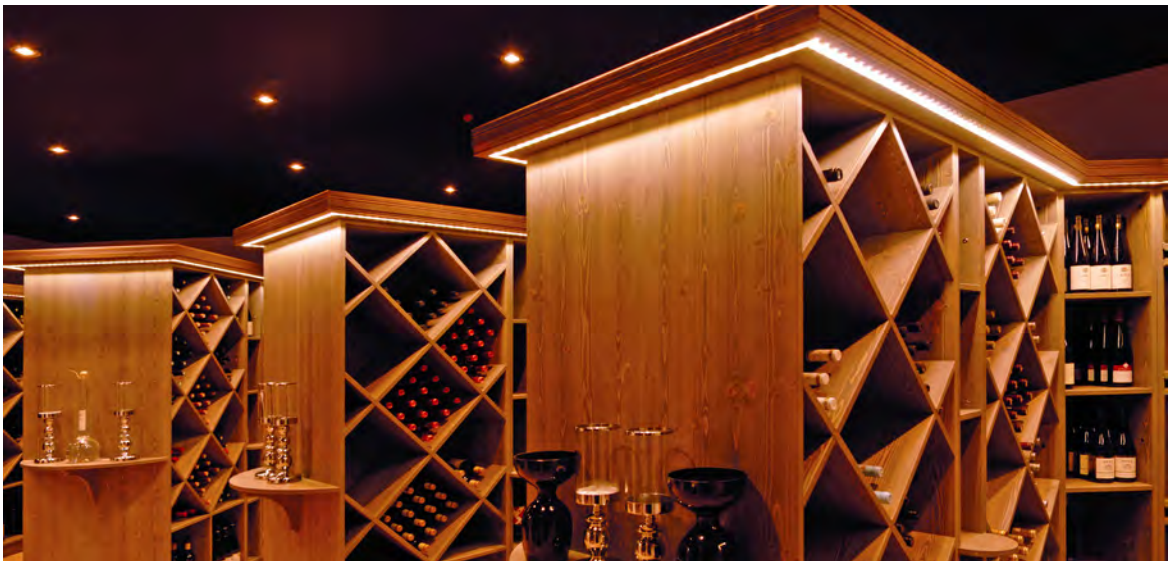

AU-01-08

· for LED strips up to 9.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970000	Silver	Matt / Anodised	1000 mm	**€ 11.95**
970001	Silver	Matt / Anodised	2000 mm	**€ 23.95**
970003	Black	Matt / Anodised	2000 mm	**€ 23.95**
970008	Silver	Matt / Anodised	3000 mm	**€ 35.95**
970005	White	Matt / Powder-coated	2000 mm	**€ 23.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m	**983500**	**983502**	**983504**	**€ 7.95**
2 m	**983501**	**983503**	**983505**	**€ 17.95**
3 m			**983506**	**€ 25.95**
1 m		**984002**	**984004**	**€ 7.95**
2 m		**984003**	**984005**	**€ 17.95**
1 m		**984502**	**984504**	**€ 7.95**
2 m		**984503**	**984505**	**€ 17.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black	
			
978000	**978001**	**978002**	
			
978500	**978501**	**978502**	
			
979080	**979081**	**979082**	
			
979580	**979581**	**979582**	

Accessories

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 31.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

AU-02-08

· for LED strips up to 9.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970101	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970103	Black	Matt / Anodised	2000 mm	**€ 28.95**
970108	Silver	Matt / Anodised	3000 mm	**€ 42.95**
970105	White	Matt / Powder-coated	2000 mm	**€ 28.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
2 m	**983501**	**983503**	**983505**	**€ 17.95**
3 m			**983506**	**€ 25.95**
2 m		**984003**	**984005**	**€ 17.95**
2 m		**984503**	**984505**	**€ 17.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
978040	**978041**	**978042**
978540	**978541**	**978542**
979100	**979101**	**979102**
		
979600	**979601**	**979602**

Accessories

930347	3M double-sided adhesive tape 50,000x12x0.2 mm	**€ 31.95**
987002	Set of 2 retaining clips for AU-08	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

Photo: Daniel Vieser . Architectural photography, Karlsruhe

AU-01-10

· for LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970020	Silver	Matt / Anodised	1000 mm	**€ 11.95**
970021	Silver	Matt / Anodised	2000 mm	**€ 23.95**
970023	Black	Matt / Anodised	2000 mm	**€ 23.95**
970028	Silver	Matt / Anodised	3000 mm	**€ 35.95**
970025	White	Matt / Powder-coated	2000 mm	**€ 23.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
1 m	**985010**			**€ 7.95**
2 m	**985011**			**€ 17.95**
3 m	**985016**			**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978010	**978011**	**978012**
		
978510	**978511**	**978512**
		
979000	**979001**	**979002**
		
979500	**979501**	**979502**
		
980000	**980001**	**980002**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm	**€ 38.95**
987004	Set of 2 retaining clips for AU-10	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

AU-02-10

· for LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970120	Silver	Matt / Anodised	1000 mm	**€ 14.95**
970121	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970123	Black	Matt / Anodised	2000 mm	**€ 28.95**
970128	Silver	Matt / Anodised	3000 mm	**€ 44.95**
970125	White	Matt / Powder-coated	2000 mm	**€ 28.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
1 m	**985010**			**€ 7.95**
2 m	**985011**			**€ 17.95**
3 m	**985016**			**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

	White	Grey	Black
	978050	**978051**	**978052**
	978550	**978551**	**978552**
	979020	**979021**	**979022**
	979520	**979521**	**979522**
	980010	**980011**	**980012**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 38.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

AU-01-12

· for LED strips up to 13.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970040	Silver	Matt / Anodised	1000 mm	**€ 14.95**
970041	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970043	Black	Matt / Anodised	2000 mm	**€ 28.95**
970048	Silver	Matt / Anodised	3000 mm	**€ 42.95**
970045	White	Matt / Powder-coated	2000 mm	**€ 28.95**



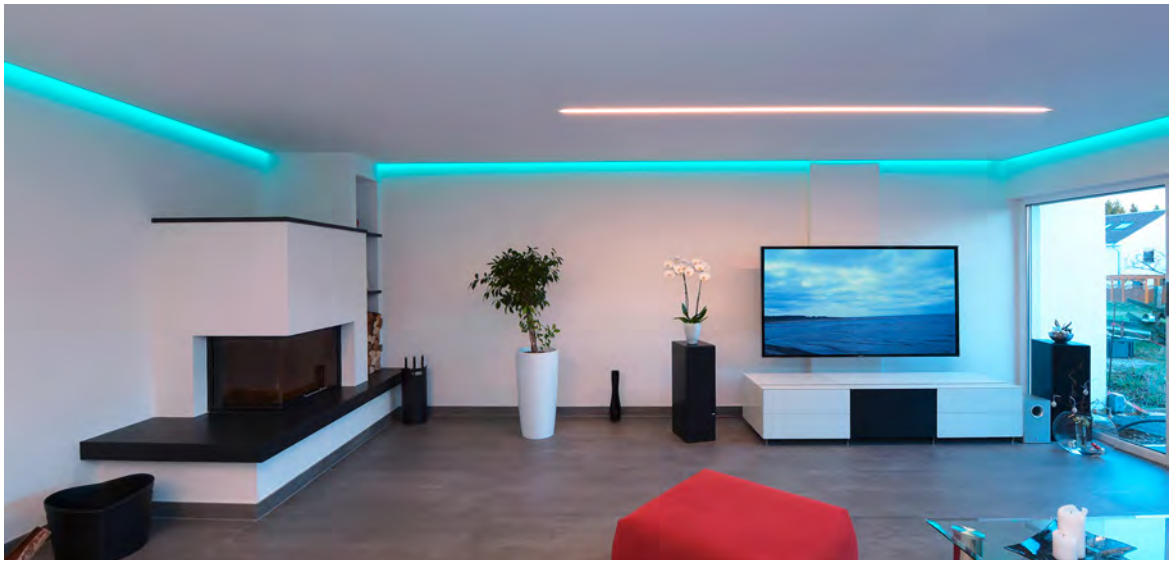

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
978020	**978021**	**978022**
978520	**978521**	**978522**
979010	**979011**	**979012**
979510	**979511**	**979512**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm	**€ 38.95**
987006	Set of 2 retaining clips for AU-12	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

AU-02-12

· for LED strips up to 13.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970140	Silver	Matt / Anodised	1000 mm	**€ 15.95**
970141	Silver	Matt / Anodised	2000 mm	**€ 31.95**
970143	Black	Matt / Anodised	2000 mm	**€ 31.95**
970148	Silver	Matt / Anodised	3000 mm	**€ 44.95**
970145	White	Matt / Powder-coated	2000 mm	**€ 31.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

	White	Grey	Black
	978060	**978061**	**978062**
	978560	**978561**	**978562**
	979030	**979031**	**979032**
	979530	**979531**	**979532**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm	**€ 38.95**
987006	Set of 2 retaining clips for AU-12	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

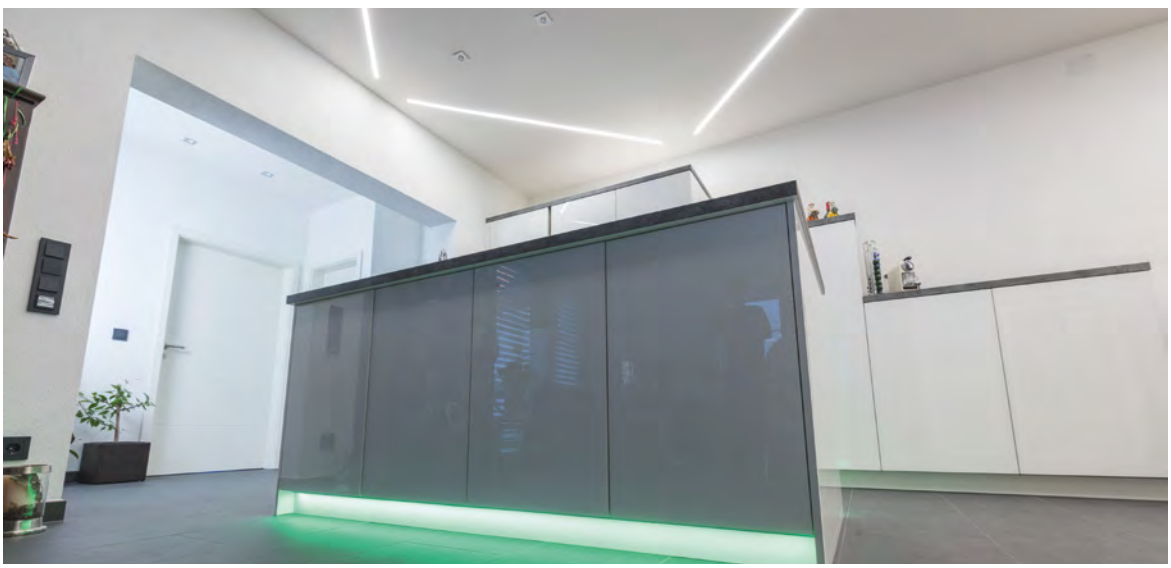

AU-01-15

· For LED strips up to 16.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970060	Silver	Matt / Anodised	1000 mm	**€ 14.95**
970061	Silver	Matt / Anodised	2000 mm	**€ 28.95**
970063	Black	Matt / Anodised	2000 mm	**€ 28.95**
970068	Silver	Matt / Anodised	3000 mm	**€ 42.95**
970065	White	Matt / Powder-coated	2000 mm	**€ 28.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983030**	**983032**	**983034**	**€ 9.95**
2 m	**983031**	**983033**	**983035**	**€ 19.95**
3 m	**983038**	**983037**	**983036**	**€ 28.95**
1 m	**983530**	**983532**	**983534**	**€ 9.95**
2 m	**983531**	**983533**	**983535**	**€ 19.95**
3 m		**983539**	**983536**	**€ 28.95**
1 m		**984032**	**984034**	**€ 9.95**
2 m		**984033**	**984035**	**€ 19.95**
3 m			**984036**	**€ 28.95**
1 m		**984532**	**984534**	**€ 9.95**
2 m		**984533**	**984535**	**€ 19.95**

end caps set | 2 pieces | Plastic | € 4.95

	White	Grey	Black
			
	978030	**978031**	**978032**
			
	978530	**978531**	**978532**
			
	979090	**979091**	**979092**
			
	979590	**979591**	**979592**

Accessories

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 48.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

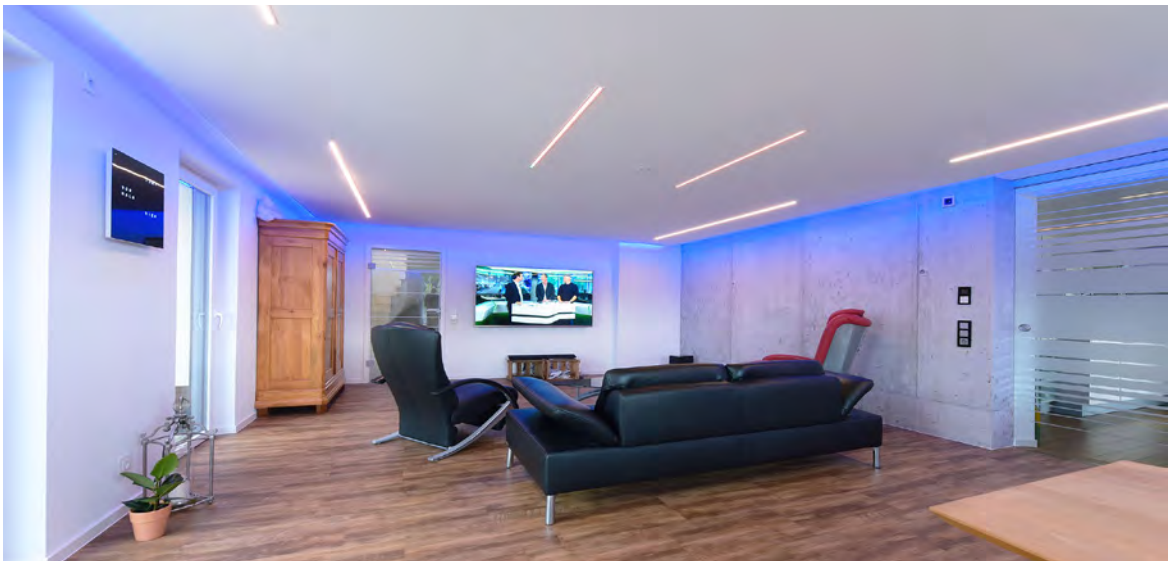

AU-02-15

· For LED strips up to 16.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970160	Silver	Matt / Anodised	1000 mm	**€ 15.95**
970161	Silver	Matt / Anodised	2000 mm	**€ 31.95**
970163	Black	Matt / Anodised	2000 mm	**€ 31.95**
970168	Silver	Matt / Anodised	3000 mm	**€ 44.95**
970165	White	Matt / Powder-coated	2000 mm	**€ 31.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983030**	**983032**	**983034**	**€ 9.95**
2 m	**983031**	**983033**	**983035**	**€ 19.95**
3 m	**983038**	**983037**	**983036**	**€ 28.95**
1 m	**983530**	**983532**	**983534**	**€ 9.95**
2 m	**983531**	**983533**	**983535**	**€ 19.95**
3 m		**983539**	**983536**	**€ 28.95**
1 m		**984032**	**984034**	**€ 9.95**
2 m		**984033**	**984035**	**€ 19.95**
3 m			**984036**	**€ 28.95**
1 m		**984532**	**984534**	**€ 9.95**
2 m		**984533**	**984535**	**€ 19.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978070	**978071**	**978072**
		
978570	**978571**	**978572**
		
979110	**979111**	**979112**
979610	**979611**	**979612**

Accessories

930349	3M double-sided adhesive tape 50,000x20x0.20 mm	**€ 48.95**
987008	Set of 2 retaining clips for AU-15	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

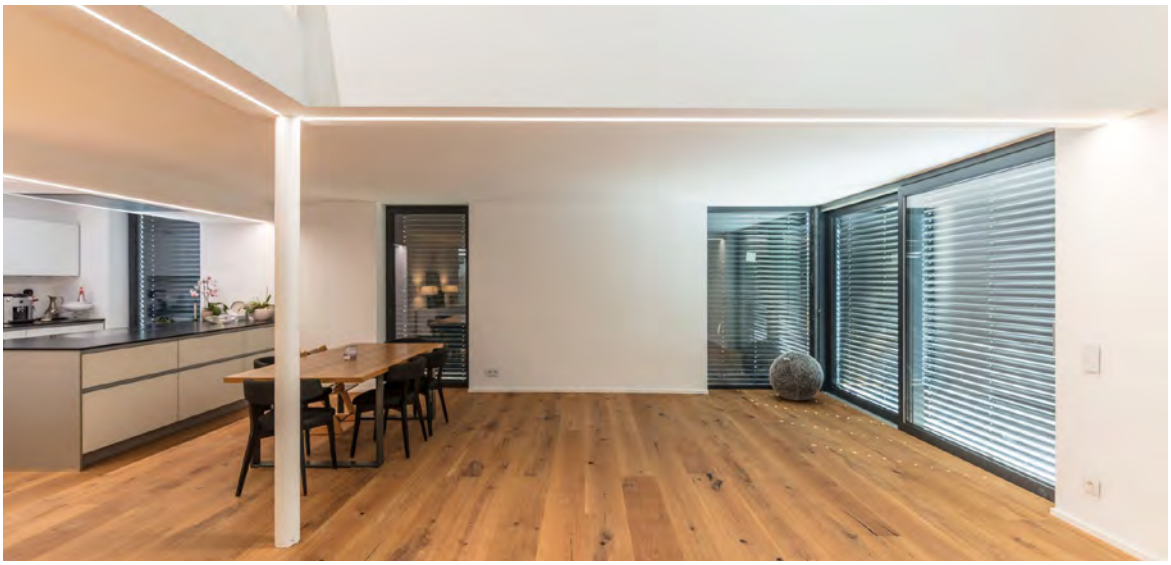

AU-02-20

· For LED strips up to 21.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970201	Silver	2000 mm	**€ 37.95**
970202	Silver	3000 mm	**€ 59.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
1 m	**983040**	**983044**	**€ 11.50**
2 m	**983041**	**983045**	**€ 21.95**
3 m		**983046**	**€ 32.95**
1 m		**984044**	**€ 11.50**
2 m		**984045**	**€ 21.95**
1 m		**984544**	**€ 11.50**
2 m		**984545**	**€ 21.95**

end caps set | 2 pieces | Plastic | € 4.95

Grey



978161

978351

978361

Accessories

930350	3M double-sided adhesive tape 50,000x25x0.20 mm	**€ 56.95**
987010	Set of 2 retaining clips for AU-20	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

ET-01-05

· For LED strips up to 5.7 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975081	Silver	Matt / Anodised	**€ 17.95**
975083	Black	Matt / Anodised	**€ 17.95**
975085	White	Matt / Powder-coated	**€ 17.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
1 m	**983550**	**983554**	**€ 5.95**
2 m	**983551**	**983555**	**€ 11.95**
3 m		**983556**	**€ 18.95**
2 m		**984055**	**€ 11.95**
1 m		**984554**	**€ 5.95**
2 m		**984555**	**€ 11.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978680	**978681**	**978682**
		
	979181	**979182**
		
	979681	**979682**

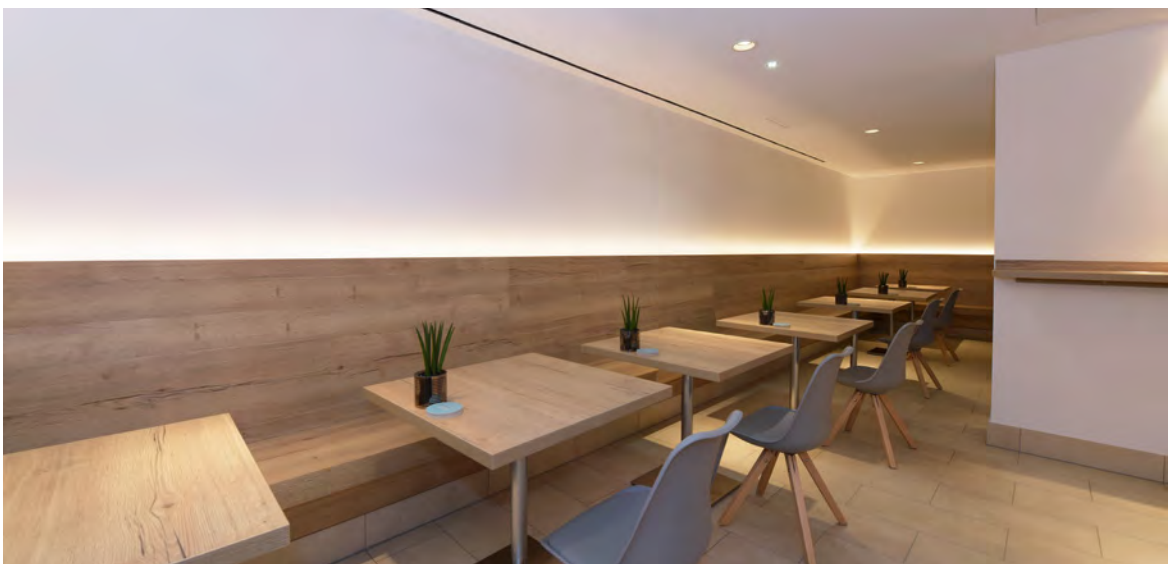

ET-01-08

· For LED strips up to 9.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975001	Silver	Matt / Anodised	2000 mm	**€ 26.95**
975003	Black	Matt / Anodised	2000 mm	**€ 26.95**
975008	Silver	Matt / Anodised	3000 mm	**€ 38.95**
975005	White	Matt / Powder-coated	2000 mm	**€ 26.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m	**983500**	**983502**	**983504**	**€ 7.95**
2 m	**983501**	**983503**	**983505**	**€ 17.95**
3 m			**983506**	**€ 25.95**
1 m		**984002**	**984004**	**€ 7.95**
2 m		**984003**	**984005**	**€ 17.95**
1 m		**984502**	**984504**	**€ 7.95**
2 m		**984503**	**984505**	**€ 17.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black	
			
978080	**978081**	**978082**	
			
978580	**978581**	**978582**	
			
979120	**979121**	**979122**	
			
979620	**979621**	**979622**	

Accessories

930347	3M double-sided adhesive tape 50,000x12x0.2 mm		**€ 31.95**
987002	Set of 2 retaining clips for AU-08		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

ET-02-08

· For LED strips up to 9.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975101	Silver	Matt / Anodised	2000 mm	**€ 31.95**
975103	Black	Matt / Anodised	2000 mm	**€ 31.95**
975108	Silver	Matt / Anodised	3000 mm	**€ 44.95**
975105	White	Matt / Powder-coated	2000 mm	**€ 31.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m	**983500**	**983502**	**983504**	**€ 7.95**
2 m	**983501**	**983503**	**983505**	**€ 17.95**
3 m			**983506**	**€ 25.95**
1 m		**984002**	**984004**	**€ 7.95**
2 m		**984003**	**984005**	**€ 17.95**
1 m		**984502**	**984504**	**€ 7.95**
2 m		**984503**	**984505**	**€ 17.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
978120	**978121**	**978122**
978620	**978621**	**978622**
979140	**979141**	**979142**
	979641	

Accessories

930347	3M double-sided adhesive tape 50,000x12x0.2 mm	**€ 31.95**
987002	Set of 2 retaining clips for AU-08	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

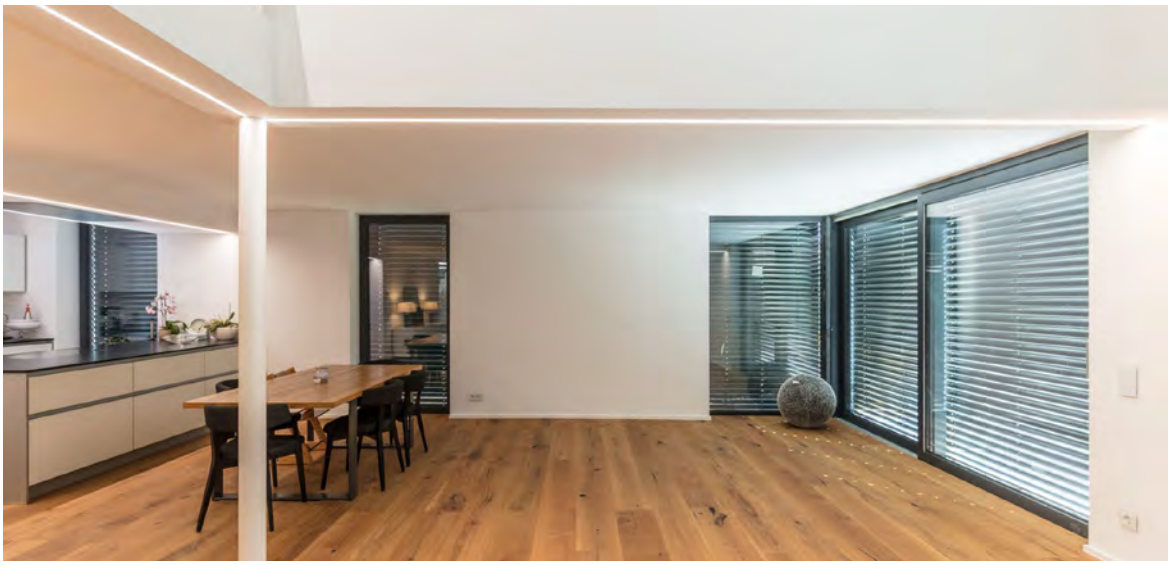

ET-01-10

· For LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975021	Silver	Matt / Anodised	2000 mm	**€ 26.95**
975023	Black	Matt / Anodised	2000 mm	**€ 26.95**
975028	Silver	Matt / Anodised	3000 mm	**€ 38.95**
975025	White	Matt / Powder-coated	2000 mm	**€ 26.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
1 m	**985010**			**€ 7.95**
2 m	**985011**			**€ 17.95**
3 m	**985016**			**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

	White	Grey	Black
			
	978090	**978091**	**978092**
			
	978590	**978591**	**978592**
			
	979040	**979041**	**979042**
			
	979540	**979541**	**979542**
			
	980040	**980041**	**980042**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 38.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

ET-02-10

· For LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975121	Silver	Matt / Anodised	2000 mm	**€ 31.95**
975123	Black	Matt / Anodised	2000 mm	**€ 31.95**
975128	Silver	Matt / Anodised	3000 mm	**€ 44.95**
975125	White	Matt / Powder-coated	2000 mm	**€ 31.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
1 m	**985010**			**€ 7.95**
2 m	**985011**			**€ 17.95**
3 m	**985016**			**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978130	**978131**	**978132**
		
978630	**978631**	**978632**
		
979060	**979061**	**979062**
		
979560	**979561**	**979562**
		
980060	**980061**	

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm		**€ 38.95**
987004	Set of 2 retaining clips for AU-10		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

ET-01-12

· For LED strips up to 13.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975041	Silver	Matt / Anodised	**€ 31.95**
975045	White	Matt / Powder-coated	**€ 31.95**



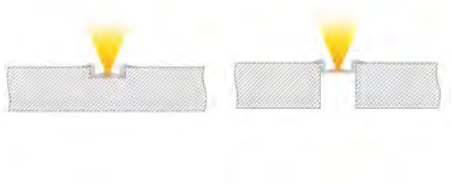

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black	
			
978100	**978101**	**978102**	
			
978600	**978601**	**978602**	
			
979050	**979051**	**979052**	
			
979550	**979551**	**979552**	

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm	**€ 38.95**
987006	Set of 2 retaining clips for AU-12	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**



ET-02-12

· For LED strips up to 13.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975141	Silver	Matt / Anodised	2000 mm	**€ 35.95**
975143	Black	Matt / Anodised	2000 mm	**€ 35.95**
975148	Silver	Matt / Anodised	3000 mm	**€ 54.95**
975145	White	Matt / Powder-coated	2000 mm	**€ 35.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
978140	**978141**	**978142**
978640	**978641**	**978642**
979070	**979071**	**979072**
	979571	**979572**

Accessories

930348	3M double-sided adhesive tape 50,000x15x0.20 mm	**€ 38.95**
987006	Set of 2 retaining clips for AU-12	**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces	**€ 23.95**

ET-01-15

· For LED strips up to 16.3 mm wide

Housing	Aluminium
Length	2000 mm

Article	Housing Color	Surface	Price
975063	Black	Matt / Anodised	**€ 31.95**
975065	White	Matt / Powder-coated	**€ 31.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983030**	**983032**	**983034**	**€ 9.95**
2 m	**983031**	**983033**	**983035**	**€ 19.95**
1 m	**983530**	**983532**	**983534**	**€ 9.95**
2 m	**983531**	**983533**	**983535**	**€ 19.95**
1 m		**984032**	**984034**	**€ 9.95**
2 m		**984033**	**984035**	**€ 19.95**
1 m		**984532**	**984534**	**€ 9.95**
2 m		**984533**	**984535**	**€ 19.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black	
			
978110	**978111**	**978112**	
			
978610	**978611**	**978612**	
			
979130	**979131**	**979132**	
			
979630	**979631**	**979632**	

Accessories

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 48.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

ET-02-15

· For LED strips up to 16.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975161	Silver	Matt / Anodised	2000 mm	**€ 35.95**
975163	Black	Matt / Anodised	2000 mm	**€ 35.95**
975168	Silver	Matt / Anodised	3000 mm	**€ 54.95**
975165	White	Matt / Powder-coated	2000 mm	**€ 35.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983030**	**983032**	**983034**	**€ 9.95**
2 m	**983031**	**983033**	**983035**	**€ 19.95**
3 m	**983038**	**983037**	**983036**	**€ 28.95**
1 m	**983530**	**983532**	**983534**	**€ 9.95**
2 m	**983531**	**983533**	**983535**	**€ 19.95**
3 m		**983539**	**983536**	**€ 28.95**
1 m		**984032**	**984034**	**€ 9.95**
2 m		**984033**	**984035**	**€ 19.95**
3 m			**984036**	**€ 28.95**
1 m		**984532**	**984534**	**€ 9.95**
2 m		**984533**	**984535**	**€ 19.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black	
			
978150	**978151**	**978152**	
			
978650	**978651**	**978652**	
			
979150	**979151**	**979152**	
			
979650	**979651**	**979652**	

Accessories

930349	3M double-sided adhesive tape 50,000x20x0.20 mm		**€ 48.95**
987008	Set of 2 retaining clips for AU-15		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

H- AND GROOVE-PROFILES

Groove and H-profiles are offered with a comprehensive range of mounting accessories and are hard to beat in terms of versatility. The range of accessories includes cable suspensions, tension springs, sliding blocks and much more.

AU-03-12

· For LED strips up to 13.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
970231	Silver	**€ 37.95**



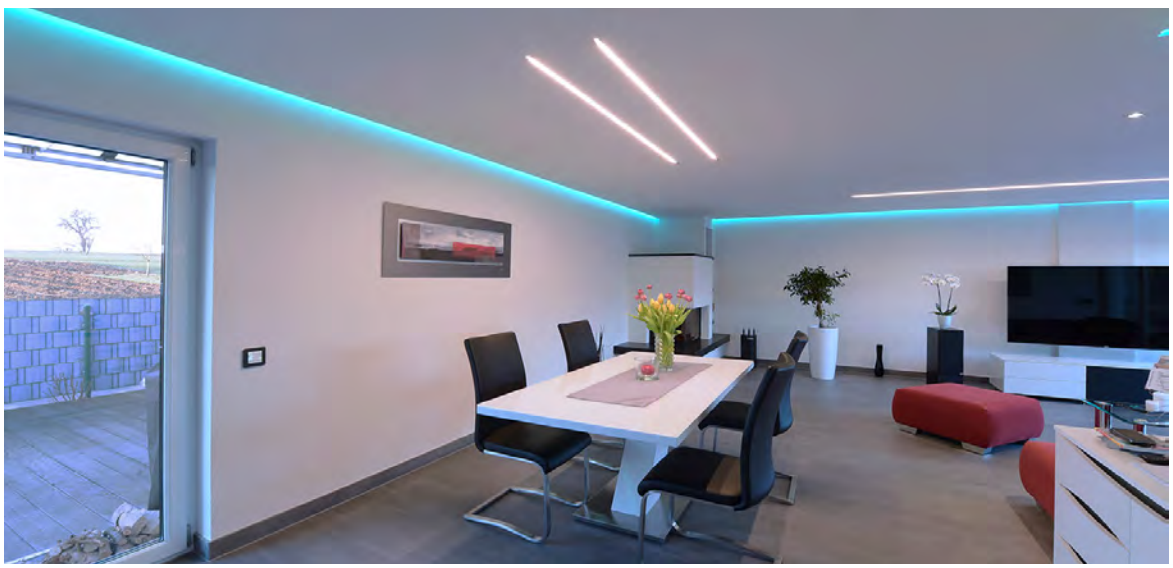

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

Grey	
	978291
	978711
	979221
	979721

Accessories

987020	Universal sliding block/longitudinal connector, set of 2 pieces		**€ 7.95**
987060	Cable suspension (swivel), set of 2 pieces		**€ 35.95**

ET-04-12

· For LED strips up to 13.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
975231	Silver	**€ 39.95**



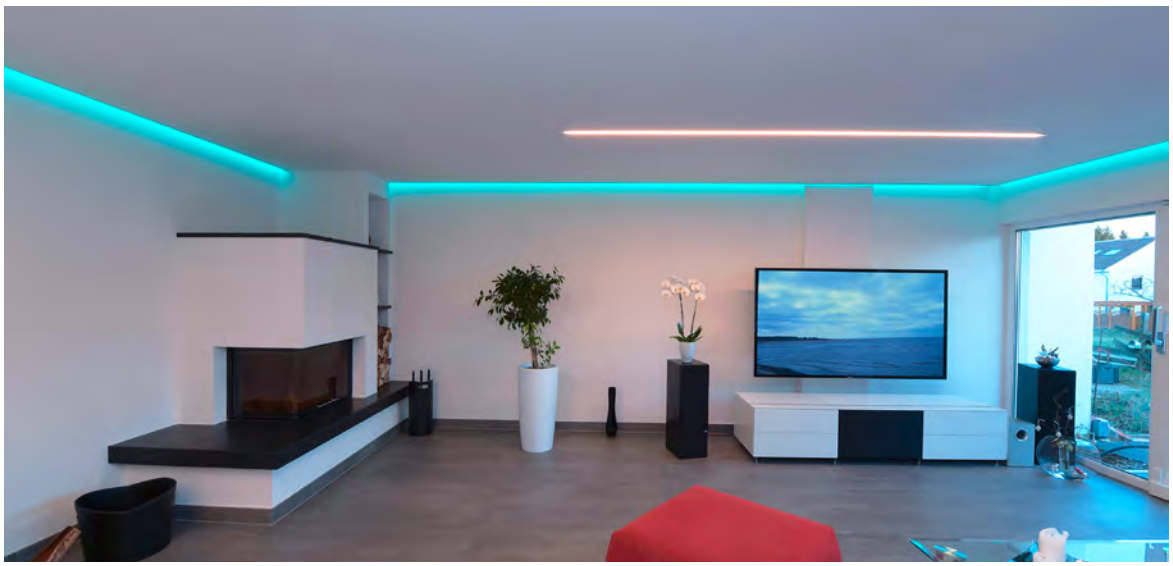

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 34.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | 2 pieces | Plastic

	Grey	Silver	
		978301	**€ 4.95**
		988021	**€ 21.95**
	978721		**€ 4.95**
	979231		**€ 4.95**
	979731		**€ 4.95**

Accessories

987020 Universal sliding block/longitudinal connector, set of 2 pieces **€ 7.95**

987040 Sliding block with tensioning springs, set of 2 pieces **€ 7.95**

AU-10-12

· For LED strips up to 13 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970280	Silver	Matt / Anodised	2000 mm	**€ 35.95**
970281	Silver	Matt / Anodised	3000 mm	**€ 54.95**
970284	White	Matt / Powder-coated	2000 mm	**€ 35.95**
970285	White	Matt / Powder-coated	3000 mm	**€ 54.95**



Cover | Polycarbonate

	Clear	Milky	Black	
2 m	**983096**	**983090**	**983093**	**€ 23.95**
3 m	**983097**	**983091**	**983094**	**€ 35.95**
20 m	**983098**	**983092**		**€ 199.95**

end caps set | Aluminium | € 19.95

Silver

980021



Accessories

980023	Mounting clip, set (2 pieces)	**€ 4.95**
987025	Sliding block/longitudinal connector	**€ 9.95**
987026	Sliding block/corner connector 120°	**€ 9.95**
987027	Sliding block/corner connector 90°	**€ 9.95**

Accessories for **970280**, **970281**

980020	end caps set aluminium 2 pieces	**19,95 €**
980021	end caps set aluminium 2 pieces	**19,95 €**

980020

980021

With the kind support of Albtherme Waldbronn / Ziegler Technics buero@ziegler-technics.de

STEP-, SOCKET-, ANGLE-, CORNER-PROFILES

The perfect light is not always planned from the very planned from the start. With the mounting and corner profiles, you can also integrate linear light at a later stage.

AL-01-10

· For LED strips up to 11.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970503	Silver	2000 mm	**€ 59.95**
970502	Silver	3000 mm	**€ 94.95**

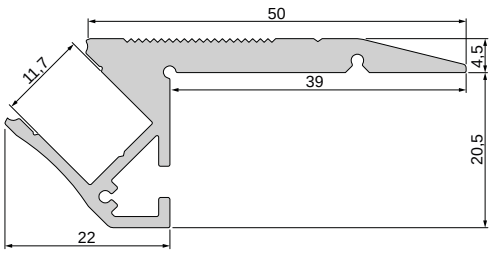

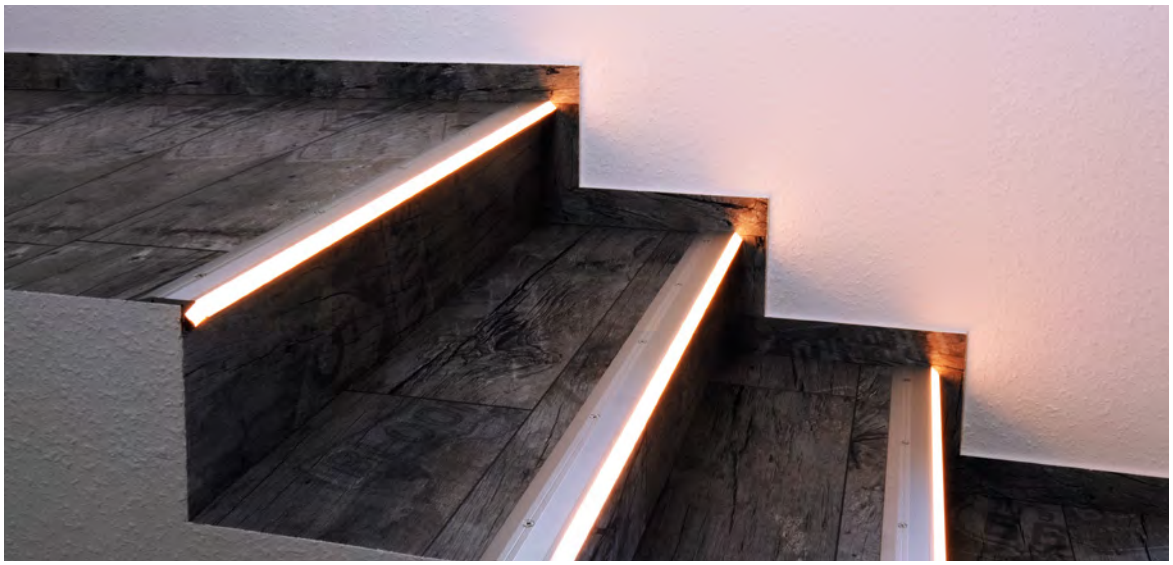

Cover | PMMA - Polymethyl methacrylate
Cover | accessible polycarbonate*

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
1 m			**983080***	**€ 11.50**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
2 m			**983081***	**€ 21.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
3 m			**983082***	**€ 32.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey



978191

Accessories

930105 Assembly adhesive 310 ml **€ 35.95**

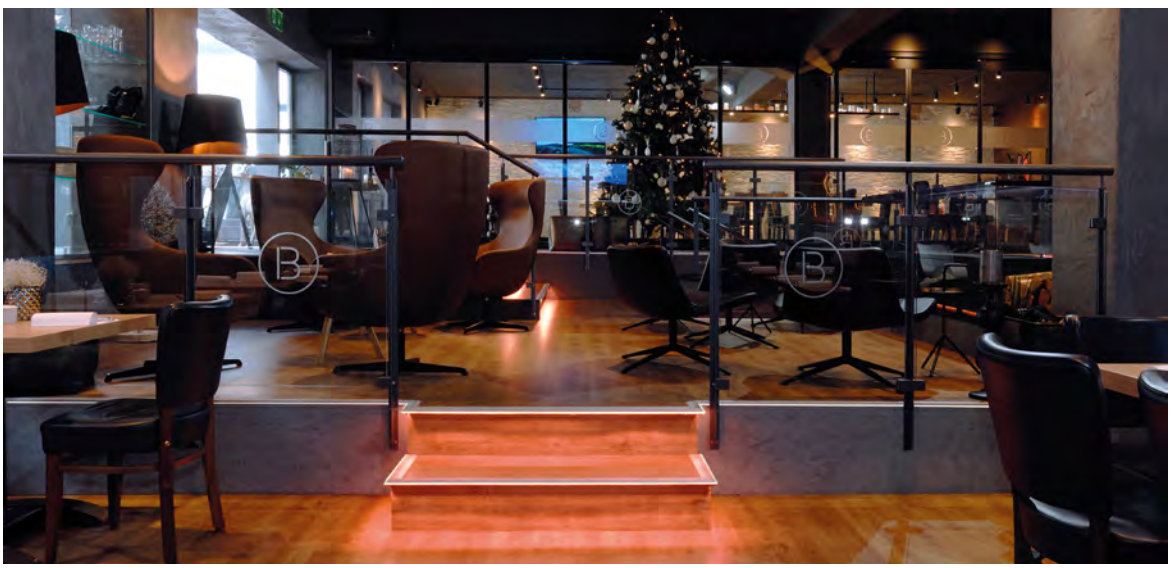

AL-02-10

· For LED strips up to 11.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970520	Silver	1000 mm	**€ 30.95**
970523	Silver	2000 mm	**€ 59.95**
970522	Silver	3000 mm	**€ 94.95**

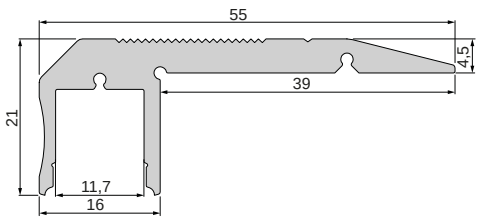



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey



978201

Accessories

930105 Assembly adhesive 310 ml

€ 35.95

AV-01-20

· For LED strips up to 22 mm wide

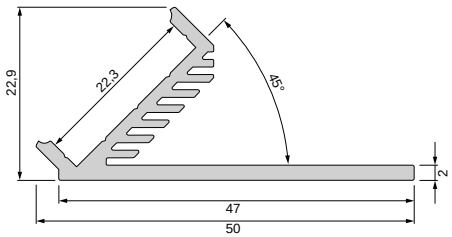

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
970460	Silver	**€ 35.95**

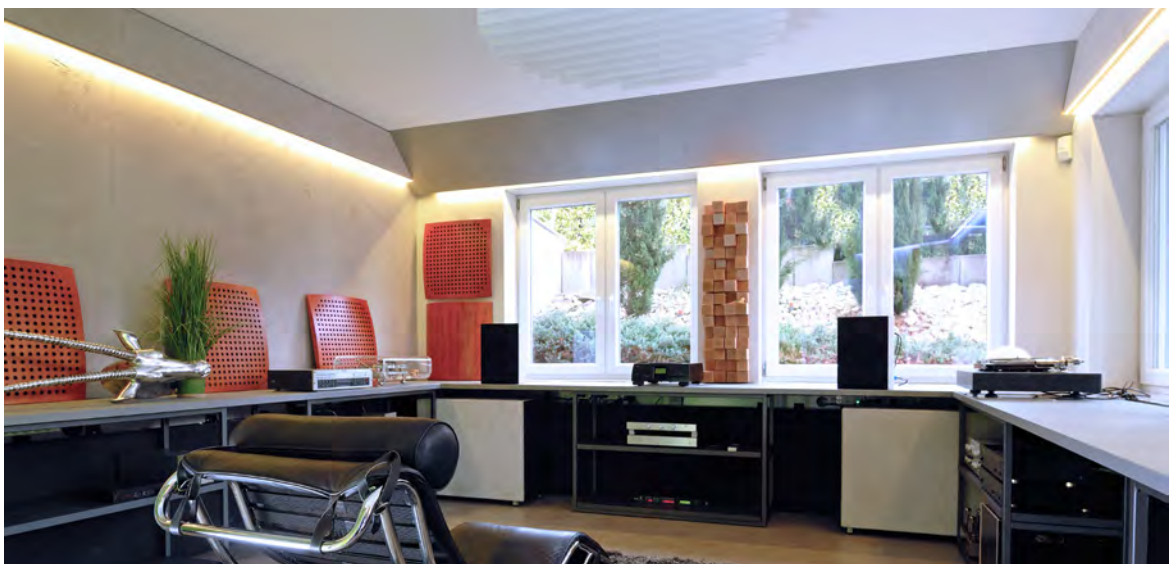

Cover | PMMA - Polymethyl methacrylate

	Clear	Milky	
1 m	**983040**	**983044**	**€ 11.50**
2 m	**983041**	**983045**	**€ 21.95**
3 m		**983046**	**€ 32.95**

1 m		**984044**	**€ 11.50**
2 m		**984045**	**€ 21.95**



1 m		**984544**	**€ 11.50**
2 m		**984545**	**€ 21.95**



Accessories

930105 Assembly adhesive 310 ml **€ 35.95**

AV-02-20

· For LED strips up to 22 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
970470	Silver	**€ 35.95**

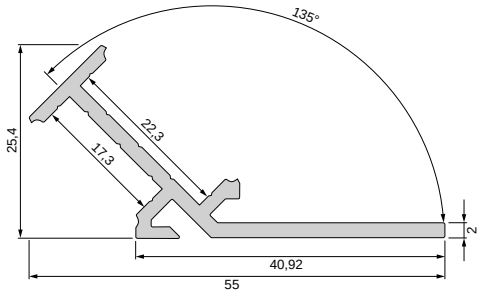

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
				
1 m	**983040**		**983044**	**€ 11.50**
2 m	**983041**		**983045**	**€ 21.95**
3 m			**983046**	**€ 32.95**
3 m		**983539**		**€ 28.95**
				
1 m			**984044**	**€ 11.50**
2 m			**984045**	**€ 21.95**
				
1 m			**984544**	**€ 11.50**
2 m			**984545**	**€ 21.95**

Accessories

930105 Assembly adhesive 310 ml **€ 35.95**

AM-01-10

· For LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970301	Silver	Matt / Anodised	2000 mm	**€ 37.95**
970303	Black	Matt / Anodised	2000 mm	**€ 37.95**
970308	Silver	Matt / Anodised	3000 mm	**€ 59.95**
970305	White	Matt / Powder-coated	2000 mm	**€ 37.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
4 m	**983560**	**983561**	**983562**	**€ 33.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey	Black
		
978700	**978701**	**978702**

Accessories

930105 Assembly adhesive 310 ml **€ 35.95**

AM-02-10

·For LED strips up to 11.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970602	Silver	2000 mm	**€ 82.95**
970600	Silver	3000 mm	**€ 124.95**
970601	Black	3000 mm	**€ 124.95**

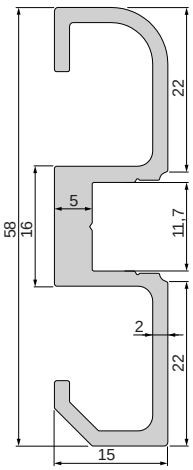

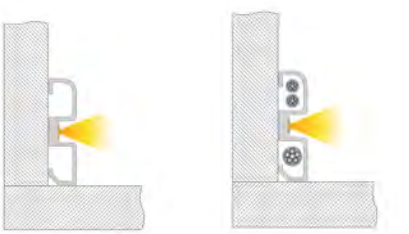

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
4 m	**983560**	**983561**	**983562**	**€ 33.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
4 m		**984010**	**984011**	**€ 33.95**

end caps set | 2 pieces (left/right) | Plastic

Grey	Black	
978241	**978242**	**€ 4.95**

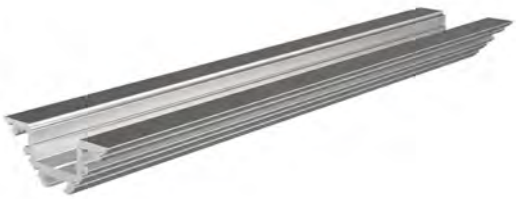

AV-01-10

· For LED strips up to 11.3 mm wide

Housing Aluminium

Article	Housing Color	Surface	Length	Price
970401	Silver	Matt / Anodised	2000 mm	**€ 35.95**
970404	Silver	Matt / Anodised	3000 mm	**€ 54.95**
970403	White	Matt / Powder-coated	2000 mm	**€ 35.95**



Photo: Daniel Vieser . Architectural photography, Karlsruhe

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**
1 m	**983510**	**983512**	**983514**	**€ 7.95**
2 m	**983511**	**983513**	**983515**	**€ 17.95**
3 m	**983516**	**983517**	**983518**	**€ 25.95**
4 m	**983560**	**983561**	**983562**	**€ 33.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
4 m		**984010**	**984011**	**€ 33.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
4 m		**984510**	**984511**	**€ 33.95**
1 m	**985010**			**€ 7.95**
2 m	**985011**			**€ 17.95**
3 m	**985016**			**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey
978170	**978171**
	
	
	

Accessories

930105 Assembly adhesive 310 ml **€ 35.95**

930348 3M double-sided adhesive tape 50,000x15x0.20 mm **€ 38.95**

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

EV-04-12

· For LED strips up to 13.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
975411	Silver	2000 mm	**€ 39.95**
975412	Silver	3000 mm	**€ 61.95**



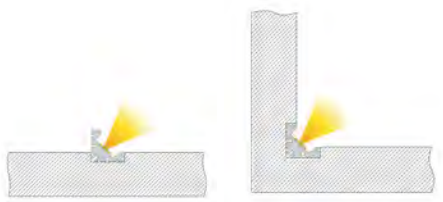

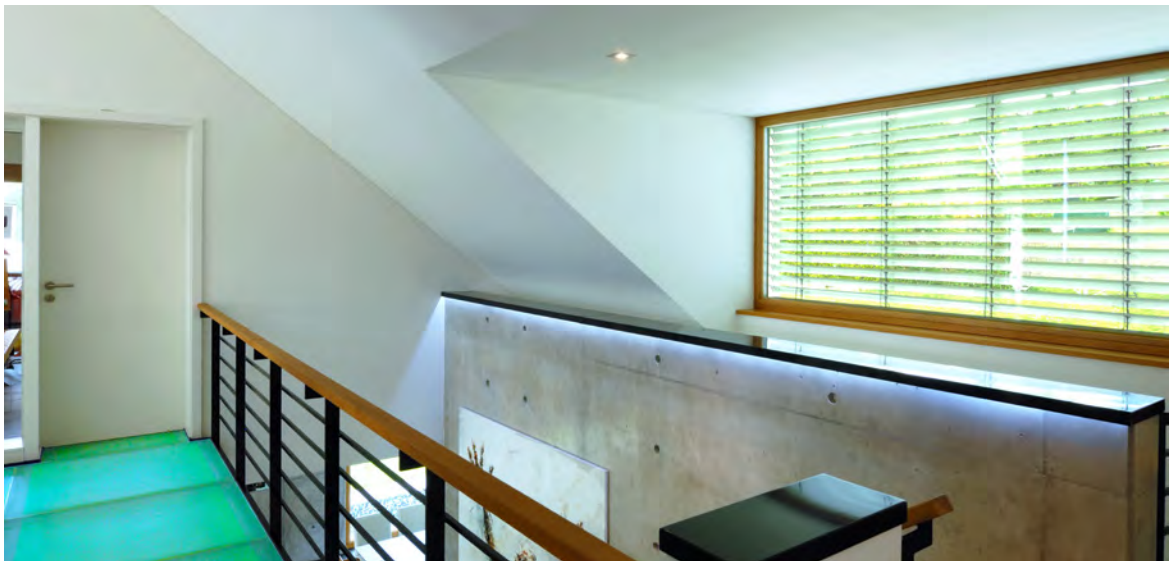

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**
1 m	**983520**	**983522**	**983524**	**€ 7.95**
2 m	**983521**	**983523**	**983525**	**€ 17.95**
3 m	**983527**		**983526**	**€ 25.95**
1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**
1 m		**984522**	**984524**	**€ 7.95**
2 m		**984523**	**984525**	**€ 17.95**
3 m			**984526**	**€ 25.95**

end caps set | Plastic | € 4.95

Grey



978341







Accessories

930105	Assembly adhesive 310 ml		**€ 35.95**
987006	Set of 2 retaining clips for AU-12		**€ 3.95**
987080	Universal holding clip mount (swivel) set of 2 pieces		**€ 23.95**

AV-05-12

· For LED strips up to 12 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970550	Silver	2000 mm	**€ 39.95**
970551	Silver	3000 mm	**€ 59.95**

Cover | Polycarbonate

Milky

2 m	**983100**	**€ 23.95**
3 m	**983101**	**€ 35.95**

2 m	**984570**	**€ 23.95**
3 m	**984571**	**€ 35.95**

2 m	**985570**	**€ 23.95**
3 m	**985571**	**€ 35.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 34.95

Silver



978370



979760

980550

AV-05-15

· For LED strips up to 15 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970560	Silver	2000 mm	**€ 49.95**
970561	Silver	3000 mm	**€ 79.95**

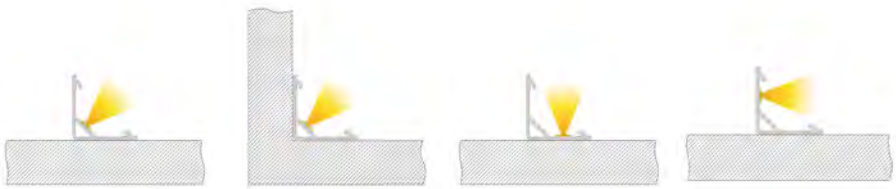

Cover | Polycarbonate

Milky

2 m	**983110**	**€ 30.95**
3 m	**983111**	**€ 44.95**

2 m	**984580**	**€ 30.95**
3 m	**984581**	**€ 44.95**

2 m	**985580**	**€ 30.95**
3 m	**985581**	**€ 44.95**

end caps set | 2 pieces
1x installation material | Aluminium

Silver



978380 **€ 34.95**



979770 **€ 34.95**

980560 **€ 34.95**

AV-05-25

· For LED strips up to 25 mm wide or two 12 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970570	Silver	2000 mm	**€ 69.95**
970571	Silver	3000 mm	**€ 99.95**

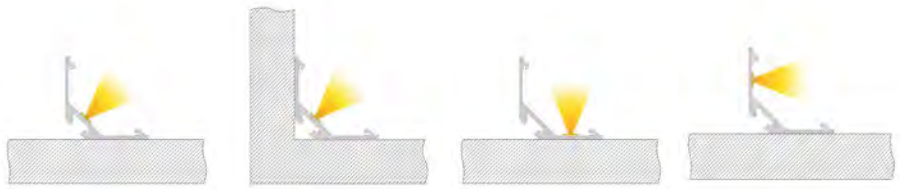

Cover | Polycarbonate

Milky

2 m	**983120**	**€ 35.95**
3 m	**983121**	**€ 54.95**

2 m	**984590**	**€ 35.95**
3 m	**984591**	**€ 54.95**

2 m	**985590**	**€ 35.95**
3 m	**985591**	**€ 54.95**

end caps set | 2 pieces
1x installation material | Aluminium

Silver



978390 **€ 34.95**



979780 **€ 34.95**

980570 **€ 34.95**

Foto: Daniel Vieser . Architekturfotografie, Karlsruhe

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

DRY CONSTRUCTION PROFILES

Our dry construction profiles offer you full creative freedom. Redefine linear light – whether as a primary light or for accent lighting.

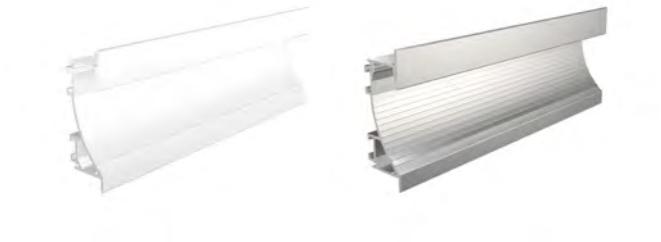

EL-02-12

· **For LED strips up to 14 mm wide**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975491	Silver	Matt / Anodised	2000 mm	**€ 82.95**
975496	Silver	Matt / Anodised	3000 mm	**€ 124.95**
975495	White	Matt / Powder-coated	2000 mm	**€ 82.95**

Cover | PMMA - Polymethyl methacrylate

end caps set | 2 pieces (left/right)
1x installation material | Plastic

	Clear	Matt	Milky		White	Grey	
1 m	**983020**	**983022**	**983024**	**€ 7.95**	**978250**	**978251**	**€ 4.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**		**978252**	**€ 34.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**			

Accessories

930105	Assembly adhesive 310 ml	**€ 35.95**
930346	3M double-sided adhesive tape 50,000x10x0.2 mm	**€ 29.95**
987020	Universal sliding block/longitudinal connector, set of 2 pieces	**€ 7.95**
987040	Sliding block with tensioning springs, set of 2 pieces	**€ 7.95**

978252

ET-03-10

· **For LED strips up to 12 mm wide**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975471	Silver	Matt / Anodised	2500 mm	**€ 59.95**
975476	Silver	Matt / Anodised	3000 mm	**€ 75.95**
975475	White	Matt / Powder-coated	2500 mm	**€ 59.95**



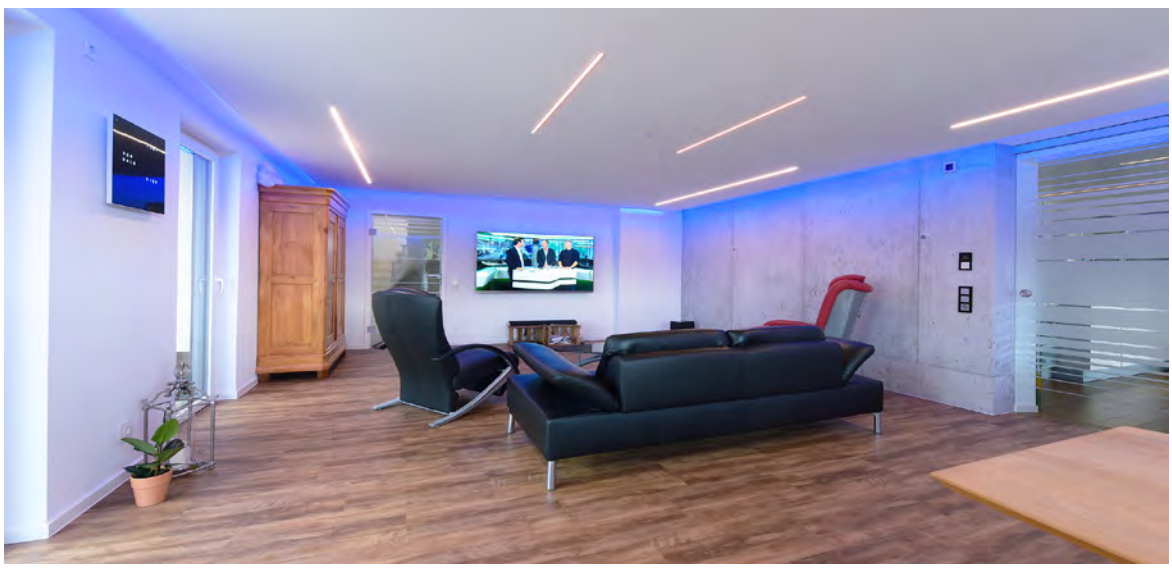

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
4 m		**984010**	**984011**	**€ 33.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
4 m		**984510**	**984511**	**€ 33.95**

end caps set | 2 pieces | Plastic | € 4.95

White	Grey
	
978260	**978261**
	
979200	**979201**
	
979700	**979701**

Accessories

930105	Assembly adhesive 310 ml	**€ 35.95**
970762	Support profile, LED support T-01-10	**€ 7.95**
987020	Universal sliding block/longitudinal connector, set of 2 pieces	**€ 7.95**
987040	Sliding block with tensioning springs, set of 2 pieces	**€ 7.95**

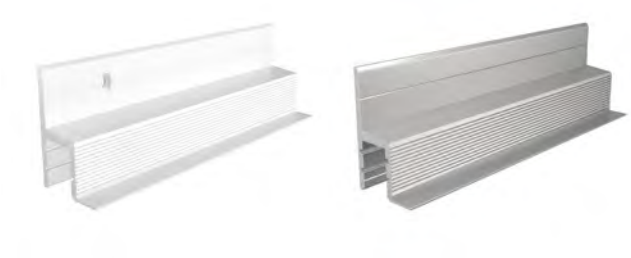

EL-03-10

· **For LED strips up to 12 mm wide**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975483	Silver	Matt / Anodised	2000 mm	**€ 59.95**
975486	Silver	Matt / Anodised	3000 mm	**€ 94.95**
975485	White	Matt / Powder-coated	2500 mm	**€ 79.95**

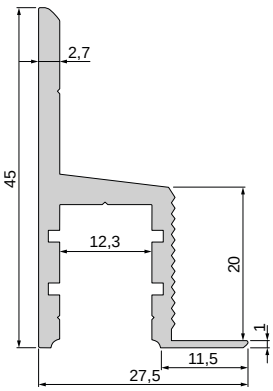

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983010**	**983012**	**983014**	**€ 7.95**
2 m	**983011**	**983013**	**983015**	**€ 17.95**
3 m	**983016**	**983017**	**983018**	**€ 25.95**
4 m	**983060**	**983061**	**983062**	**€ 33.95**
1 m		**984012**	**984014**	**€ 7.95**
2 m		**984013**	**984015**	**€ 17.95**
3 m		**984017**	**984018**	**€ 25.95**
4 m		**984010**	**984011**	**€ 33.95**
1 m		**984512**	**984514**	**€ 7.95**
2 m		**984513**	**984515**	**€ 17.95**
3 m		**984517**	**984518**	**€ 25.95**
4 m		**984510**	**984511**	**€ 33.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

	White	Grey
	978270	**978271**
	979210	**979211**
	979710	**979711**

Accessories for **975483**, **975485**, **975486**

970762 Support profile, LED support T-01-10 **€ 7.95**

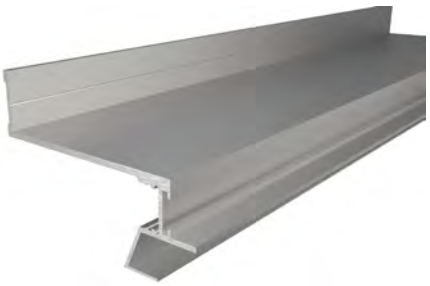

EL-04-12

- **for LED strips up to 14 mm wide**
- **for plasterboard 12.5 mm thick**

Housing	Aluminium
Surface	Natural
Length	3000 mm

Article	Housing Color	Price
975530	Silver	**€ 99.95**

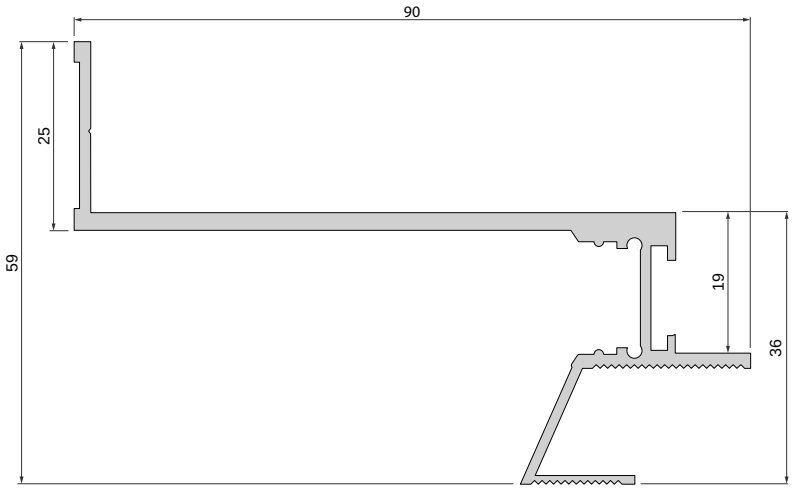



Cover | Polycarbonate

Milky

2 m	**983090**	**€ 23.95**
3 m	**983091**	**€ 35.95**

Photo: Daniel Vieser . Architectural photography, Karlsruhe

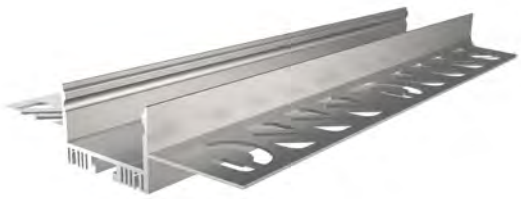

EU-01-36

· **For LED strips up to 36 mm wide**

Housing	Aluminium
Surface	Natural
Length	3000 mm

Article	Housing Color	Price
975501	Silver	**€ 124.95**

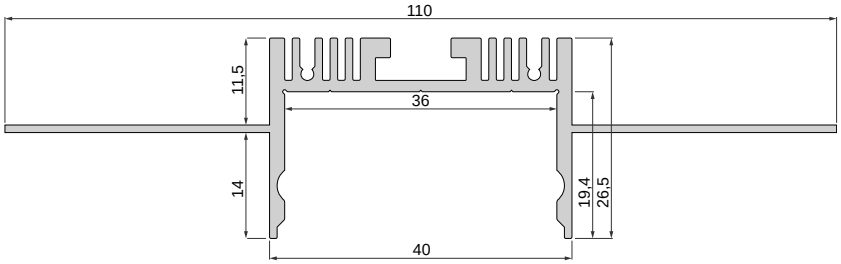

Cover | PMMA - Polymethyl methacrylate

Milky

3 m **985601** **€ 42.95**

end caps set | 2 pieces
1x installation material | Aluminium | € 21.95

Grey



978175 **€ 21.95**

Accessories

985605 Dummy cover

€ 30.95

B

EU-02-36

· **For LED strips up to 36 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975525	Silver	**€ 129.95**

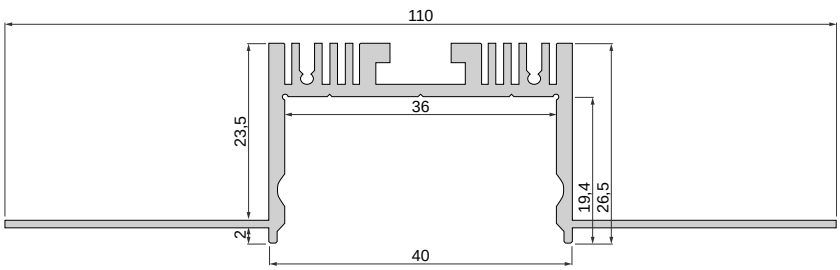

Cover | PMMA - Polymethyl methacrylate

Milky

3 m **985601** **€ 42.95**

Accessories

985605 Dummy cover

€ 30.95

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

EU-10-12

· **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975511	Silver	**€ 59.95**

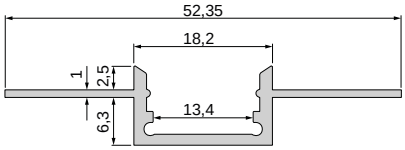

Cover | Polycarbonate

Milky

2 m	**983090**	**€ 23.95**
3 m	**983091**	**€ 35.95**

EV-11-12

· For LED strips up to 12 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975516	Silver	**€ 69.95**

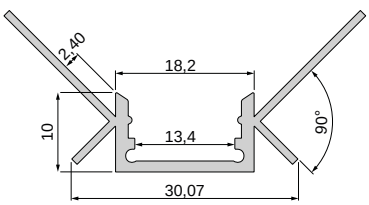



Cover | Polycarbonate

Milky

2 m	**983090**	**€ 23.95**
3 m	**983091**	**€ 35.95**

EV-12-12

· **For LED strips up to 12 mm wide**

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975521	Silver	**€ 59.95**

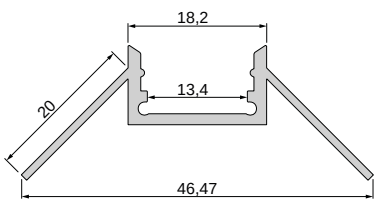

Cover | Polycarbonate

Milky

2 m	**983090**	**€ 23.95**
3 m	**983091**	**€ 35.95**

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

TILE PROFILES

Tile profiles play to every corner and closing area. Do away with conventional tile end profiles and set a new standard with linear light.

EL-01-08

- **for LED strips up to 9.3 mm wide**
- **for tile thickness up to max. 9 mm**

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
975331	Silver	2500 mm	**€ 53.95**
975334	Silver	3000 mm	**€ 64.95**

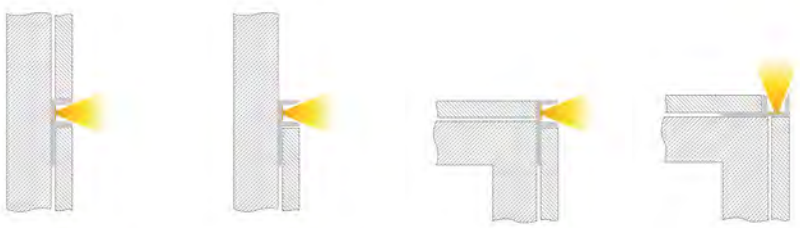



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

Grey
978211

EL-03-12

- **for LED strips up to 13.3 mm wide**
- **for tile thickness up to max. 12 mm**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975360	Silver	Matt / Anodised	1250 mm	**€ 28.95**
975361	Silver	Matt / Anodised	2500 mm	**€ 59.95**
975365	White	Matt / Powder-coated	2500 mm	**€ 59.95**

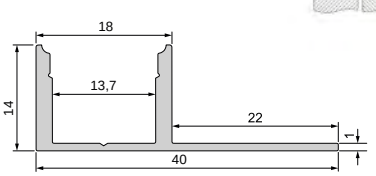

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**

1 m		**984022**	**984024**	**€ 7.95**
2 m		**984023**	**984025**	**€ 17.95**
3 m			**984026**	**€ 25.95**

EA-03-12

· **For LED strips up to 12 mm wide**

Housing Aluminium

Article	Housing Color	Surface	Length	Price
975390	Silver	Matt / Anodised	2000 mm	**€ 38.95**
975391	Silver	Matt / Anodised	3000 mm	**€ 59.95**
975394	White	Matt / Powder-coated	2000 mm	**€ 38.95**
975395	White	Matt / Powder-coated	3000 mm	**€ 59.95**



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m		**984002**	**984004**	**€ 7.95**
2 m		**984003**	**984005**	**€ 17.95**

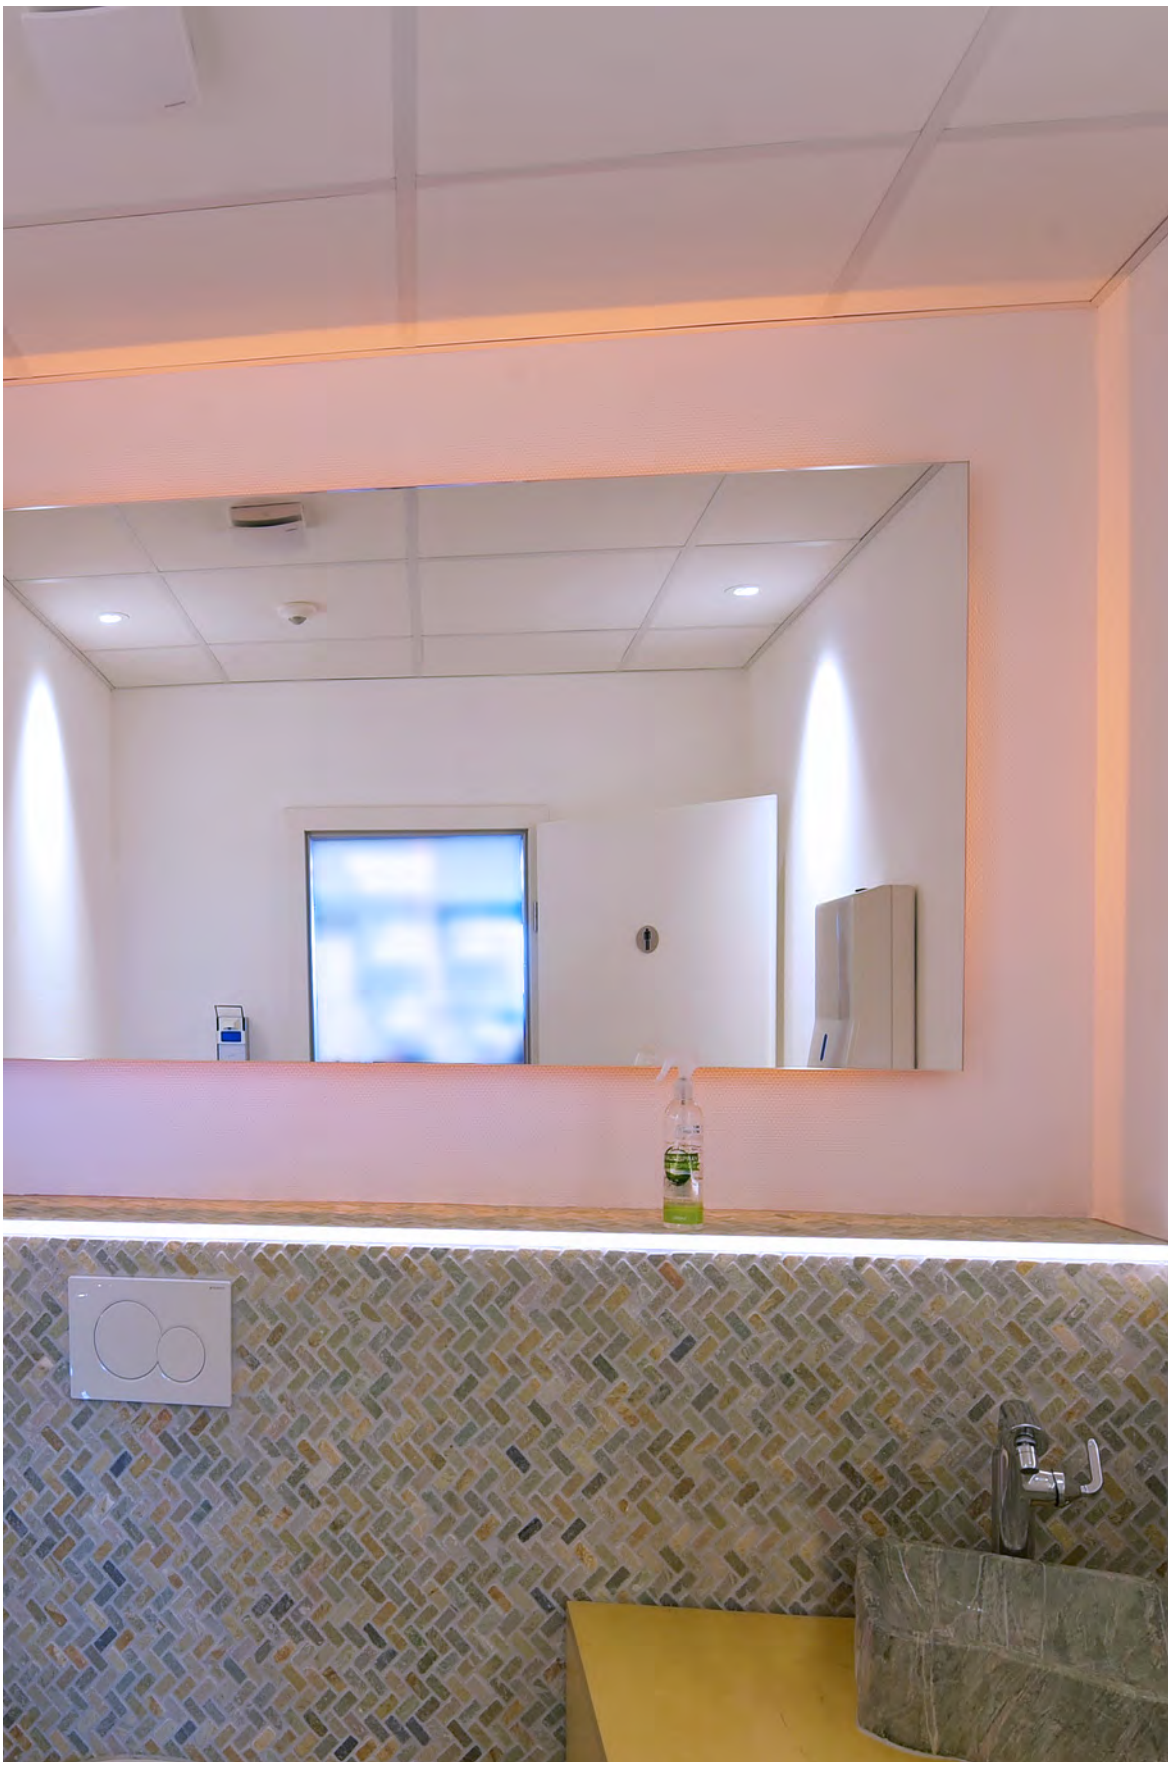

EV-01-08

- **for LED strips up to 9.3 mm wide**
- **for tile thickness up to max. 9 mm**

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
975341	Silver	2500 mm	**€ 79.95**
975344	Silver	3000 mm	**€ 99.95**

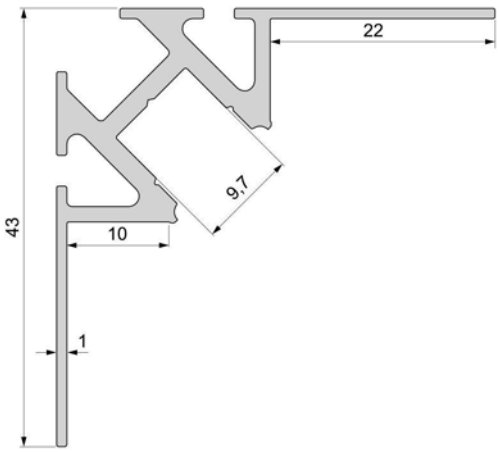

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m			**985504**	**€ 30.95**
2 m			**985505**	**€ 17.95**
3 m			**985508**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

Grey	
978221	
980501	

EV-01-12

- **for LED strips up to 13.3 mm wide**
- **for a tile thickness of up to max. 12 mm**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975371	Silver	Matt / Anodised	**€ 99.95**
975375	White	Matt / Powder-coated	**€ 99.95**

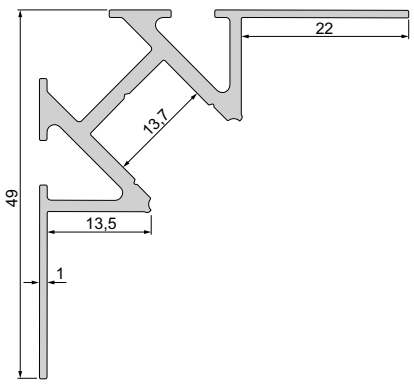



Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**

EV-02-08

- **for LED strips up to 9.3 mm wide**
- **for a tile thickness of up to 9 mm**

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
975351	Silver	2500 mm	**€ 79.95**
975353	Silver	3000 mm	**€ 99.95**

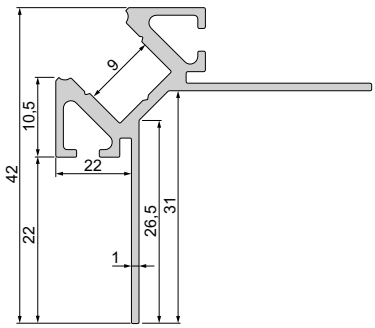

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983000**	**983002**	**983004**	**€ 7.95**
2 m	**983001**	**983003**	**983005**	**€ 17.95**
3 m	**983006**	**983007**	**983008**	**€ 25.95**
1 m			**985504**	**€ 30.95**
2 m			**985505**	**€ 17.95**
3 m			**985508**	**€ 25.95**

end caps set | 2 pieces | Plastic | € 4.95

	Grey
	978231
	980511

EV-02-12

- **for LED strips up to 13.3 mm wide**
- **for a tile thickness of up to max. 12 mm**

Housing	Aluminium
Length	2500 mm

Article	Housing Color	Surface	Price
975381	Silver	Matt / Anodised	**€ 99.95**
975385	White	Matt / Powder-coated	**€ 99.95**

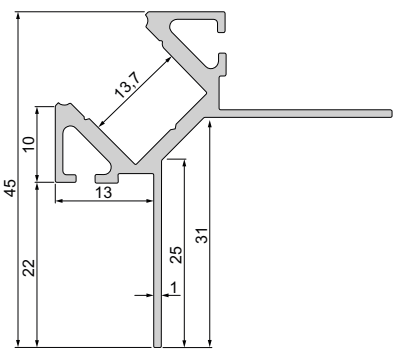

Cover | PMMA - Polymethyl methacrylate

	Clear	Matt	Milky	
1 m	**983020**	**983022**	**983024**	**€ 7.95**
2 m	**983021**	**983023**	**983025**	**€ 17.95**
3 m	**983028**	**983027**	**983026**	**€ 25.95**

With the kind support of BEST Bellemann Elektro Service Team GmbH, Rauenberg-Malschenberg

PROFILES FOR OUTDOOR USE

Outdoor areas have different requirements than indoor areas. Our IP profiles are walkable and passable and inspire as a highlight in any outdoor design.

AU-04-12

·For LED strips up to 12.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised

Article	Housing Color	Length	Price
970723	Silver	2000 mm	**€ 23.95**
970724	Silver	3000 mm	**€ 35.95**



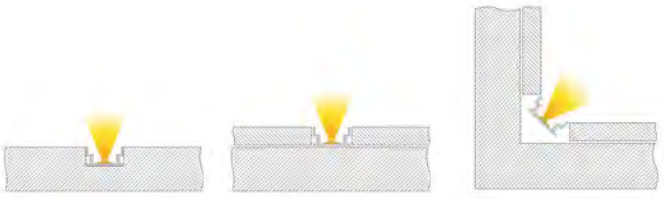

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

Cover | PMMA - Polymethyl methacrylate

Milky

2 m	**988025**	**€ 19.95**
3 m	**988028**	**€ 28.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey



981001

Accessories

930104 Natural stone sealant 310 ml

€ 39.95

ET-05-12

· For LED strips up to 12.3 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	3000 mm

Article	Housing Color	Price
975724	Silver	**€ 35.95**



Photo: Daniel Vieser . Architectural photography, Karlsruhe

Cover | PMMA - Polymethyl methacrylate
Milky

2 m	**988025**	**€ 19.95**
3 m	**988028**	**€ 28.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95
Grey



981011 **€ 4.95**

Accessories

930104 Natural stone sealant 310 ml

€ 39.95

Photo: Daniel Vieser . Architectural photography, Karlsruhe

AU-05-15

· **For LED strips up to 15.6 mm wide**

Housing	Aluminium
Surface	Natural
Length	2000 mm

Article	Housing Color	Price
970741	Silver	**€ 42.95**



Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988084**	**€ 11.50**
2 m	**988085**	**€ 21.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey

981031 **€ 4.95**

Accessories

930104	Natural stone sealant 310 ml	**€ 39.95**
970764	Support profile, LED support T-01-15	**€ 7.95**

ET-05-15

· For LED strips up to 15.6 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
975741	Silver	**€ 42.95**



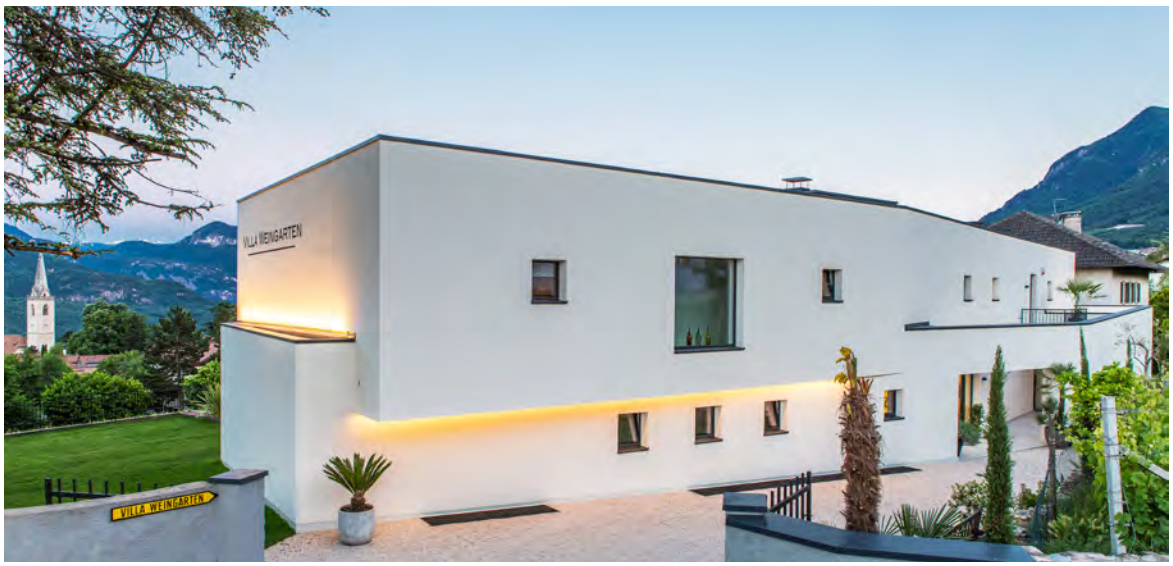

With the kind support of LED-TEC, Girlan/Italien | Foto: fotoeichhorn

Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988084**	**€ 11.50**
2 m	**988085**	**€ 21.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey



981041 **€ 4.95**

Accessories

930104	Natural stone sealant 310 ml	**€ 39.95**
970764	Support profile, LED support T-01-15	**€ 7.95**

With the kind support of LED-TEC, Girlan/Italien | Foto: fotoeichhorn

EU-01-12

· For LED strips up to 12 mm wide

Housing	Aluminium
Surface	Matt, Anodised
Length	2000 mm

Article	Housing Color	Price
975781	Silver	**€ 79.95**



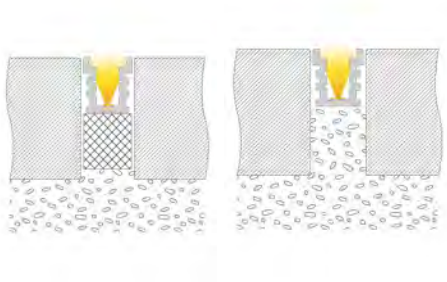

Cover | PMMA - Polymethyl methacrylate

Milky

1 m	**988054**	**€ 11.50**
2 m	**988055**	**€ 21.95**

end caps set | 2 pieces (left/right) | Plastic | € 4.95

Grey

981021	**€ 4.95**

Accessories

930104	Natural stone sealant 310 ml	**€ 39.95**
970762	Support profile, LED support T-01-10	**€ 7.95**
990109	Foam underlay	**€ 7.95**

LED STRIPES

786 COB

800 12V

802 24V

840 48V

854 230V

856 Mounting material for LED strips

led stripes

page 786
COB LED stripes

page 800
12V LED stripes

page 802
24V LED stripes

page 826
24V D FLEX SIDE VIEW

page 832
24V D FLEX TOP VIEW

page 838
24V OMNIFLEX

page 840
48V LED stripes

page 854
230V LED stripes

page 856
Material assembly
f0r LED stripes

COB STRIPES

These LED strips are ideal if the focus is on a homogeneous light pattern.

COB 24V-10W SAUNA IP67

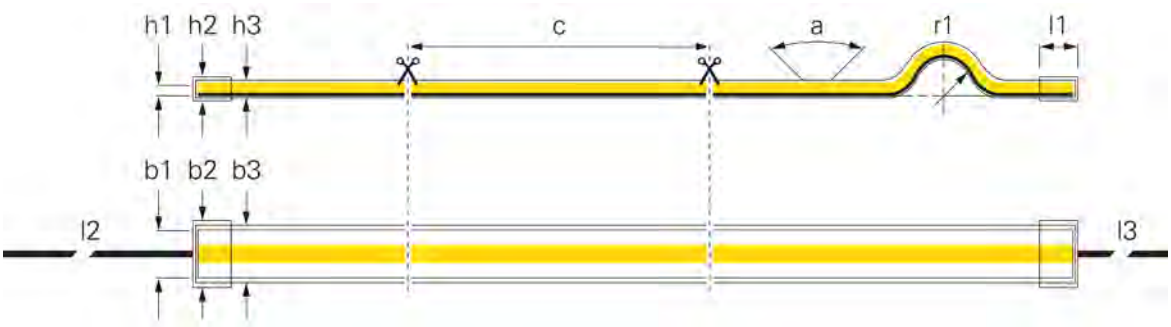

- **UV-resistant**
- **durably temperature-resistant [-10°C to 105°C]**
- **Lifetime 75,000h L70B50 / 50,000h L80B10**
- **2 m model ideal for home saunas with 2 m internal dimensions**
- **extra long supply line, Incl. mounting material**

(c) Segment Length	50 mm	(l1) Length End Cap	10 mm
(a) Light Beam Angle	180 Degree	(l2) Primary Cable Length	1.8 m
(r1) Bending Radius min.	50 mm	Rated Input 1m	10 W
(h1) Height	5.5 mm	Rated Input Voltage	24 V/DC
(h2) Height End Cap	6.5 mm	CRI (Ra)	90
(h3) Height Hose	5.5 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(b2) Width end cap	14.2 mm	Working Temperature	-10 to 105 °C
(b3) Width Hose	12 mm	Channels	1

Article	Colour Temperature	(l3) Secondary Cable Length	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840409	WW 2700 K		85 lm/W	850 lm	2000 mm	**€ 99.95**
840411	WW 2700 K	1.8 m	85 lm/W	850 lm	5000 mm	**€ 224.95**
840410	WW 3000 K		90 lm/W	900 lm	2000 mm	**€ 99.95**
840412	WW 3000 K	1.8 m	90 lm/W	900 lm	5000 mm	**€ 224.95**

Accessories

930737	Supply cable for 24 V COB Sauna stripe	**€ 12.95**
930738	Connector for 24 V COB Sauna stripe	**€ 17.95**
930736	Silicone end cap set of 2 pieces for 24 V COB Sauna stripe	**€ 0.95**
930740	Plastic profile 1 m for 24 V COB Sauna stripe	**€ 4.95**
930741	Plastic profile 2 m for 24 V COB Sauna stripe	**€ 9.95**
930739	Silicone clamps for 24 V COB Sauna stripe	**€ 1.95**
930850	Silicone adhesive 10 ml	**€ 4.95**

COB 24V-15W SAUNA IP67

IP67

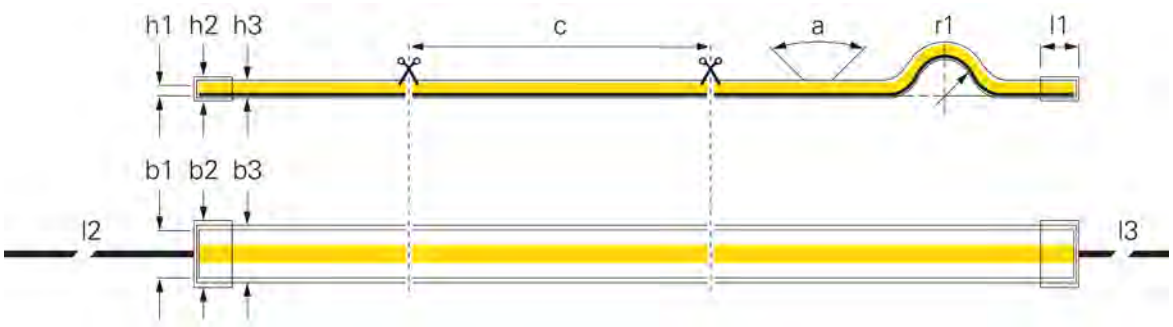

- **for saunas and steam baths**
- **available as RGB or RGBW [2,700K] variant**
- **UV-resistant**
- **durably temperature-resistant [-10°C to 105°C]**
- **2 m model ideal for home saunas with 2 m internal dimensions**
- **extra long supply line**
- **lifetime 75,000h L70B50 / 50,000 L80B10**
- **incl. mounting material**

(r1) Bending Radius min.	50 mm	(l1) Length End Cap	10 mm
(h1) Height	5 mm	(l2) Primary Cable Length	1.8 m
(h2) Height End Cap	6.5 mm	Rated Input 1m	15 W
(h3) Height Hose	5 mm	Rated Input Voltage	24 V/DC
(b1) Width	14 mm	Control	Dimmable via optional controller
(b2) Width end cap	16.2 mm		
(b3) Width Hose	14 mm	Working Temperature	-10 to 105 °C

Article	Colour Temp.	(c) Segment Length	(l3) Length	Lum. Efficiency 1m	Luminous Flux 1m	Length	Price
840413 RGB		50 mm		30 lm/W	450 lm	2000 mm	**€ 139.95**
840415 RGB		50 mm	1.8 m	30 lm/W	450 lm	5000 mm	**€ 314.95**
840414 RGB WW	2700 K	83.3 mm		40 lm/W	600 lm	2000 mm	**€ 149.95**
840416 RGB WW	2700 K	83.3 mm	1.8 m	40 lm/W	600 lm	5000 mm	**€ 334.95**

CV | IP67 | III

Accessories

930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe	**€ 0.95**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe	**€ 5.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe	**€ 11.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe	**€ 1.95**
930850	Silicone adhesive 10 ml	**€ 4.95**

Accessories for **840413**, **840415**

930798	Supply cable for 24 V COB RGB Sauna stripe	**€ 12.95**
930799	Connector for 24 V COB RGB Sauna stripe	**€ 17.95**

Accessories for **840414**, **840416**

930800	Supply cable for 24 V COB RGBW Sauna stripe	**€ 12.95**
930801	Connector for 24 V COB RGBW Sauna stripe	**€ 17.95**

COB 48V-15W FACADE LONG RUN IP67

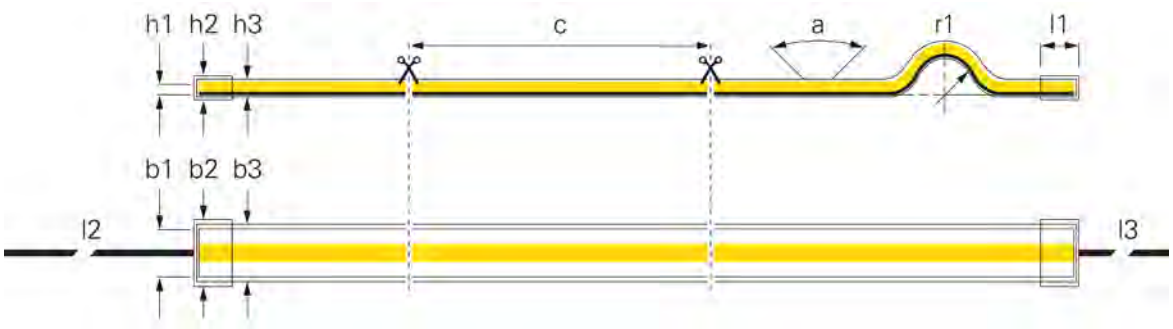

- **for weather-exposed building facades**
- **for outdoor areas with direct sunlight**
- **UV-resistant**
- **permanently temperature-resistant (-40°C to 95°C)**
- **long service life with 75,000h L70B50 / 50,000h L80B10**
- **solder-free accessories**
- **3M VHB 5604A adhesive tape with silicone primer pre-treatment**

(c) Segment Length	100 mm	Rated Input 1m	15 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(l1) Length End Cap	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-40 to 95 °C
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	(b2) Width	(h2) Height	Luminous Flux 1m	Length	EEI	Price
840428	RGB		15,5 mm	5.5 mm	380 lm	15000 mm		**€ 899.95**
840429	RGB		15,5 mm	5.5 mm	380 lm	5000 mm		**€ 324.95**
840426	WW CW	2700-6500 K	14,2 mm	6.5 mm	610 lm	15000 mm	G	**€ 674.95**
840427	WW CW	2700-6500 K	14,2 mm	6.5 mm	610 lm	5000 mm	G	**€ 249.95**
840420	WW	2700 K	14,2 mm	6.5 mm	1575 lm	15000 mm	F	**€ 499.95**
840423	WW	2700 K	14,2 mm	6.5 mm	1800 lm	5000 mm	F	**€ 179.95**
840421	WW	3000 K	14,2 mm	6.5 mm	1650 lm	15000 mm	F	**€ 499.95**
840424	WW	3000 K	14,2 mm	6.5 mm	1650 lm	5000 mm	F	**€ 179.95**
840422	NW	4000 K	14,2 mm	6.5 mm	1800 lm	15000 mm	F	**€ 499.95**
840425	NW	4000 K	14,2 mm	6.5 mm	1800 lm	5000 mm	F	**€ 179.95**

IP67

Accessories

930850	Silicone adhesive 10 ml	**€ 4.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 114.95**

Accessories for **840420**, **840421**, **840422**

862276	BASIC, DIM, CV, LCP240AD-1H48 V	**€ 219.95**

Accessories for **840420**, **840421**, **840422**, **840423**, **840424**, **840425**

930737	Supply cable for 24 V COB Sauna stripe	**€ 12.95**
930738	Connector for 24 V COB Sauna stripe	**€ 17.95**

Accessories for **840420**, **840421**, **840422**, **840423**, **840424**, **840425**, **840426**, **840427**

930736	Silicone end cap set of 2 pieces for 24 V COB Sauna stripe	**€ 0.95**
930739	Silicone clamps for 24 V COB Sauna stripe	**€ 1.95**
930740	Plastic profile 1 m for 24 V COB Sauna stripe	**€ 4.95**
930741	Plastic profile 2 m for 24 V COB Sauna stripe	**€ 9.95**
843341	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT6	**€ 84.95**
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control	**€ 99.95**

Accessories for **840420**, **840421**, **840422**, **840426**, **840428**

862272	LONG-FLAT, CV, LT-240-48	**€ 159.95**
862281	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 159.95**
872125	CV, HLG-600H-48 A	**€ 489.95**
872126	DIM, CV, HLG-600H-48B	**€ 499.95**
872145	IP, CV, V6-320-48	**€ 219.95**

Accessories for **840423**, **840424**, **840425**

862273	BASIC, DIM, CV, LCP75AD-1H48 V	**€ 129.95**
862275	BASIC, DIM, CV, LCP150AD-1H48 V	**€ 169.95**
872115	CV, PWM-200-48 KN	**€ 244.95**

Accessories for **840423**, **840424**, **840425**, **840427**, **840429**

862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 129.95**
862270	LONG-FLAT, CV, LT-100-48	**€ 96.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 129.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 144.95**
862283	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 99.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 169.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 206.95**

Accessories for **840426**, **840427**

930865	End cap for Facade Long Run series	**€ 8.95**
930866	Connecting cable for Facade Long Run series	**€ 12.95**
843342	DALI 2 PWM dimmer CV 2CH 12-48V, 8A/CH, DT8	**€ 84.95**

Accessories for **840428**, **840429**

930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe	**€ 0.95**
930798	Supply cable for 24 V COB RGB Sauna stripe	**€ 12.95**
930799	Connector for 24 V COB RGB Sauna stripe	**€ 17.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe	**€ 1.95**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe	**€ 5.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe	**€ 11.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 94.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 99.95**

COB 48V-18,5W FACADE LONG RUN IP67

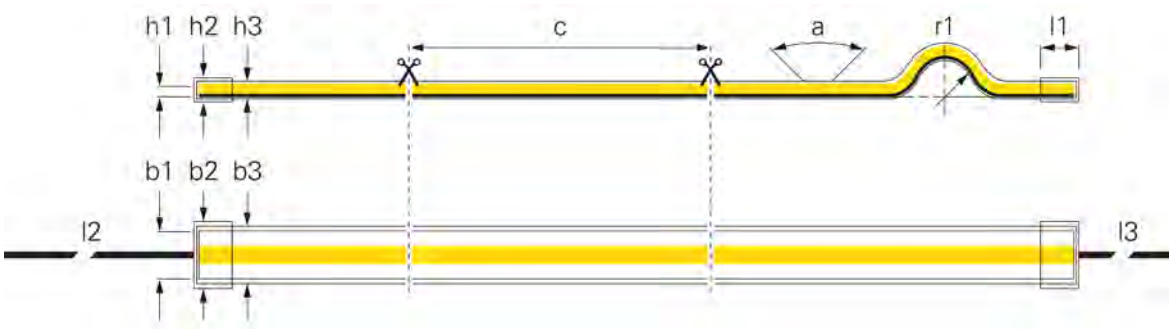

- **for weather-exposed building facades**
- **for outdoor areas with direct sunlight**
- **UV-resistant**
- **permanently temperature-resistant (-40°C to 95°C)**
- **long service life with 75,000h L70B50 / 50,000h L80B10**
- **solder-free accessories**
- **3M VHB 5604A adhesive tape with silicone primer pre-treatment**

(c) Segment Length	100 mm	(l2) Primary Cable Length	1 m
(a) Light Beam Angle	120 Degree	(l3) Secondary Cable Length	1 m
(r1) Bending Radius min.	50 mm	Rated Input 1m	18.5 W
(h1) Height	5,0 mm	Rated Input Voltage	48 V/DC
(h2) Height End Cap	5.5 mm	CRI (Ra)	90
(h3) Height Hose	5.5 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(b2) Width end cap	14 mm	Working Temperature	-40 to 95 °C
(b3) Width Hose	14 mm	Channels	4
(l1) Length End Cap	10 mm		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840432	RGB WW 3000 K	64 lm/W	890 lm	5000 mm	**€ 379.95**
840430	RGB WW 3000 K	64 lm/W	890 lm	15000 mm	**€ 999.95**
840433	RGB NW 4000 K	45 lm/W	1010 lm	5000 mm	**€ 379.95**
840431	RGB NW 4000 K	45 lm/W	1010 lm	15000 mm	**€ 999.95**



Accessories

930800	Supply cable for 24 V COB RGBW Sauna stripe	**€ 12.95**
930801	Connector for 24 V COB RGBW Sauna stripe	**€ 17.95**
930797	Silicone end cap set of 2 pieces for 24 V COB RGB/RGBW Sauna stripe	**€ 0.95**
930803	Plastic profile 1 m for 24 V COB RGB/RGBW Sauna stripe	**€ 5.95**
930804	Plastic profile 2 m for 24 V COB RGB/RGBW Sauna stripe	**€ 11.95**
930802	Silicone clamps for 24 V COB RGB/RGBW Sauna stripe	**€ 1.95**
930850	Silicone adhesive 10 ml	**€ 4.95**
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20	**€ 99.95**
843343	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT6	**€ 94.95**
843344	DALI 2 PWM dimmer CV 4CH 12-48V, 4A/CH, DT8	**€ 94.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 114.95**

Accessories for **840430**, **840431**

862272	LONG-FLAT, CV, LT-240-48	**€ 159.95**
862281	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 159.95**
872125	CV, HLG-600H-48 A	**€ 489.95**
872126	DIM, CV, HLG-600H-48B	**€ 499.95**
872145	IP, CV, V6-320-48	**€ 219.95**

Accessories for **840432**, **840433**

862269	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 129.95**
862270	LONG-FLAT, CV, LT-100-48	**€ 96.95**
862271	LONG-FLAT, CV, LT-150-48	**€ 129.95**
862274	BASIC, DIM, CV, 48 V 34-100 W	**€ 144.95**
862283	Long-Flat, DIM, CV, 48 V 50-150 W	**€ 99.95**
872142	LED power supply, IP, DIM, CV, 48 V, 33-100 W	**€ 169.95**
872143	LED power supply, IP, DIM, CV, 48 V, 66-200 W	**€ 206.95**

COB 24V-10W SHORT CUT IP20

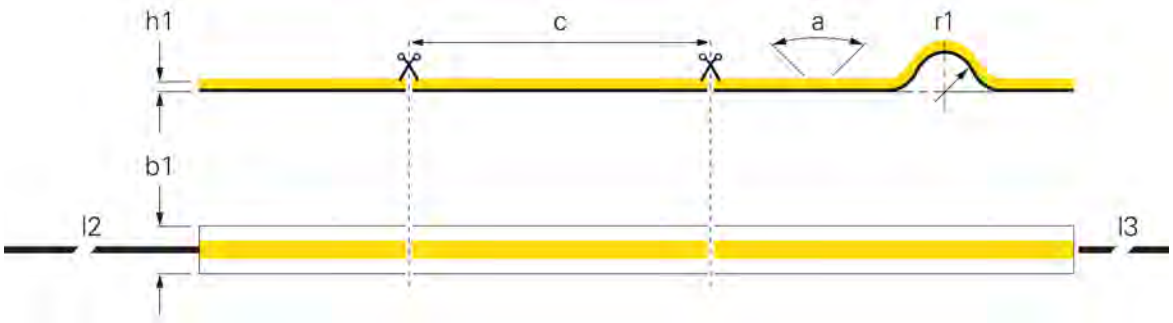

· high-performance adhesive tape 3M 300MP

(p) LED Distance	1.74 mm	Luminous Flux 1m	960 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	10.5 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 60 °C
Colour Temperature	2700-6500 K	Channels	2
Luminous Efficiency 1m	91.43 lm/W		

Article	Colour Temperature	Price
840374	WW CW 2700-6500 K	**€ 299.95**

CV | 2 CH | IP20 | III | A ↑ G | E

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

COB 24V-12W STANDARD IP20

Ra>90

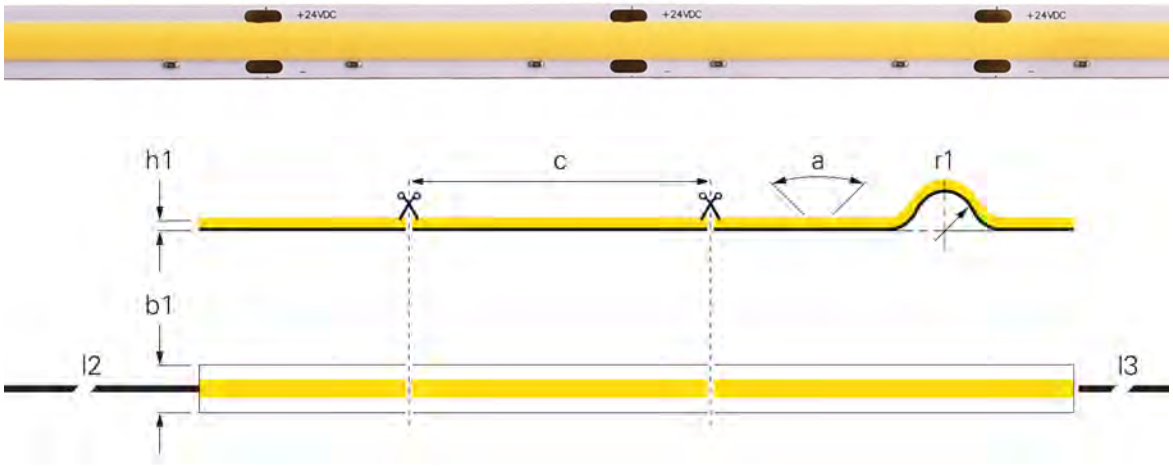

· high-performance adhesive 3M VHB5604A

(p) LED Distance	2.08 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2 mm		
(b1) Width	10 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
840296	WW 3000 K	89.6 lm/W	1120 lm	12.5 W	**€ 159.95**
840304	NW 4000 K	94.17 lm/W	1130 lm	12.0 W	**€ 159.95**

CV | 1 CH | IP20 | III | A ↑ G | F

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

COB 24V-16W STANDARD IP20

RGB

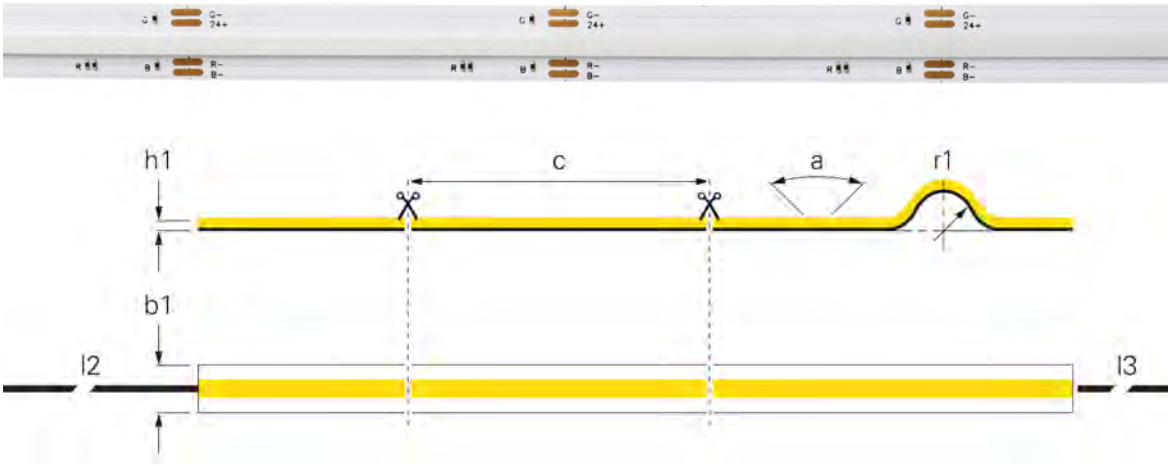

· high-performance adhesive tape 3M 300MP

(p) LED Distance	1.19 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2.2 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	40 lm/W

Luminous Flux 1m	660 lm
Length	5000 mm
Rated Input 1m	16.5 W
Rated Input Voltage	24 V/DC
Control	Dimmable via optional controller
Working Temperature	-10 to 60 °C
Channels	3

Article	Price
840375 RGB	**€ 399.95**

CV | 3 CH | IP20 | III

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

COB 24V-15W PERFORMANCE IP20

Ra>90

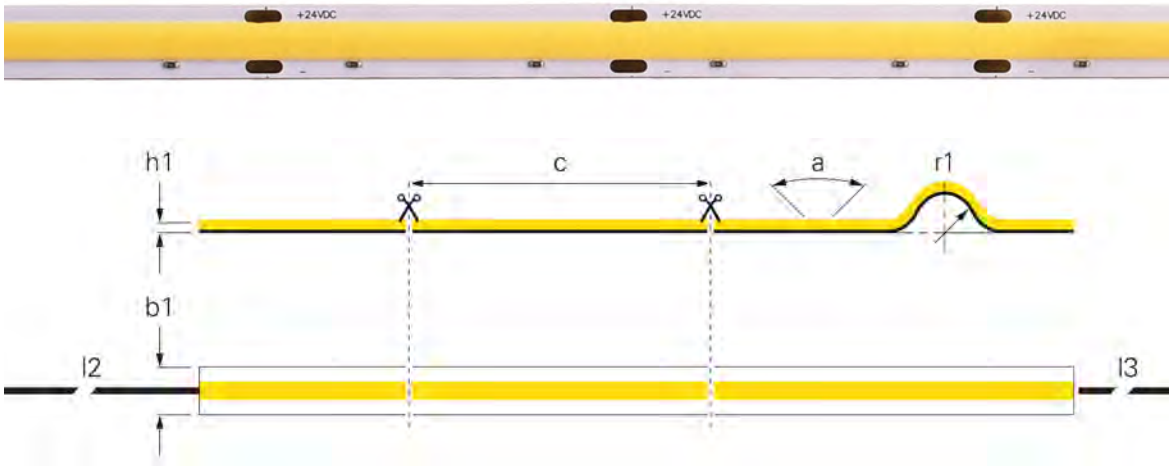

- **Adhesive tape 3M 200MP [Art. 840323] / 3M 300MP [Art. 840324]**

(p) LED Distance	2.08 mm	Luminous Flux 1m	1600 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	180 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1
Luminous Efficiency 1m	106.66 lm/W		

Article		Colour Temperature	Rated Input 1m	Price
840323	WW	3000 K	16.0 W	**€ 179.95**
840324	NW	4000 K	15.0 W	**€ 179.95**

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

COB 24V-15W PERFORMANCE IP67

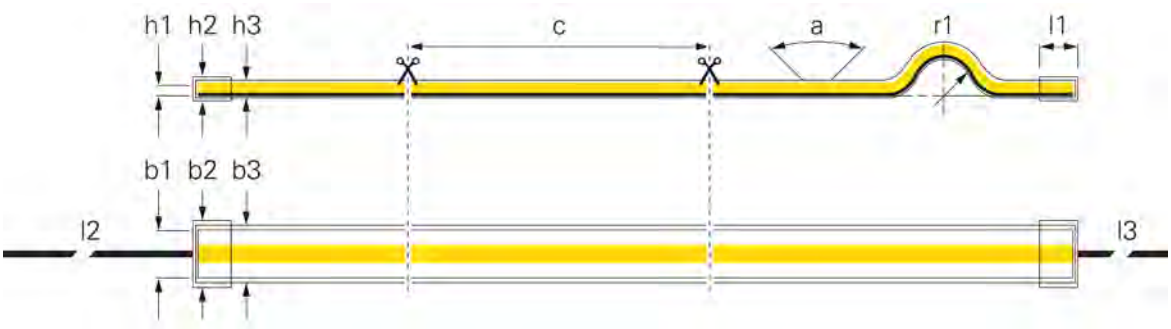

- **Including mounting material**
- **adhesive tape 3M 200MP [Art. 840321] / 3M 300MP [Art. 840322]**

(p) LED Distance	2.08 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	50 mm	Luminous Efficiency 1m	100 lm/W
(a) Light Beam Angle	180 Degree	Luminous Flux 1m	1500 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	2 mm	Rated Input 1m	15 W
(h2) Height End Cap	6 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	5 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	15 mm		
(b3) Width Hose	14 mm	Type of IP Protection	Silicone
(l1) Length End Cap	10 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1

Article		Colour Temperature	Price
840321	WW	3000 K	**€ 199.95**
840322	NW	4000 K	**€ 199.95**

CV | 1 CH | IP67 | III | A ↑ G | F

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

12V LED STRIPES

These LED strips are ideally suited for all standard applications and special assemblies with the most diverse requirements. With voltages of 12V, different protection classes, lumens, number of LEDs, power and much more, you too can find the right LED strip for your application.

SMD 12V-7W SHORT CUT IP20

Ra>90

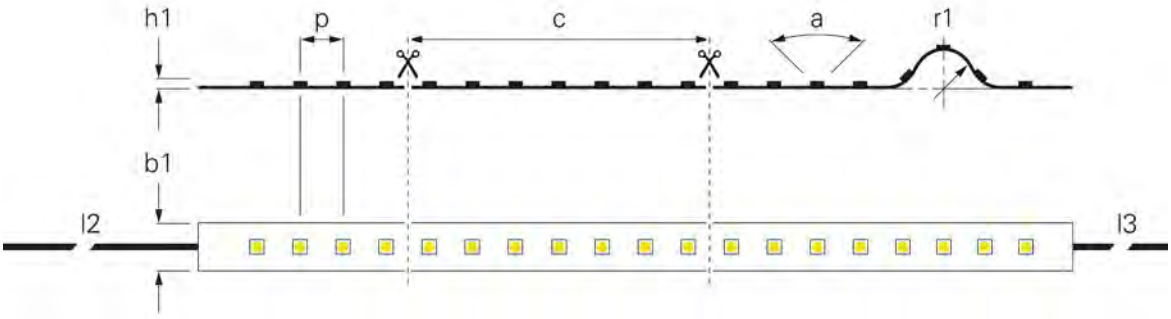

· high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	25 mm	Rated Input Voltage	12 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm		
(b1) Width	8 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	EEI	Price
840164	WW 2700 K	81.43 lm/W	570 lm	7.0 W	G	**€ 89.95**
840165	WW 3000 K	85.38 lm/W	555 lm	6.5 W	F	**€ 89.95**
840166	NW 4000 K	95.71 lm/W	670 lm	7.0 W	F	**€ 89.95**
840167	CW 6500 K	90 lm/W	630 lm	7.0 W	F	**€ 89.95**

CV | 1 CH | IP20 | III

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

24V LED STRIPES

These LED strips are ideal for all standard applications and special assemblies with a wide range of requirements. With voltages of 24V, different protection classes, lumens, number of LEDs, power and much more, you too will find the right LED strip for your application.

SMD 24V-20W POWER IP20

Ra>90

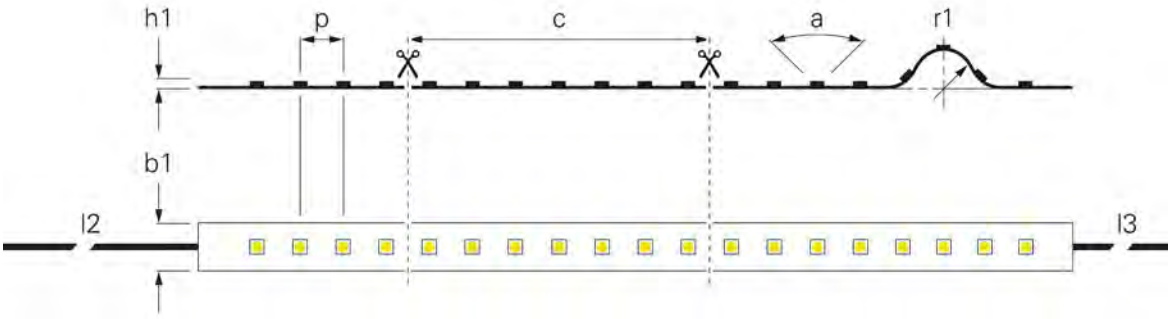

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	20 mm
(h1) Height	2 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Colour Temperature	3000 K
Luminous Efficiency 1m	76.2 lm/W

Luminous Flux 1m	1600 lm
Length	5000 mm
Rated Input 1m	21 W
Rated Input Voltage	24 V/DC
CRI (Ra)	95
Control	Dimmable via optional controller
Working Temperature	-15 to 50 °C
Channels	1

Article		Price
840122	WW	**€ 194.95**

CV | 1 CH | IP20 | III | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-10W LONG RUN IP20

Ra>90

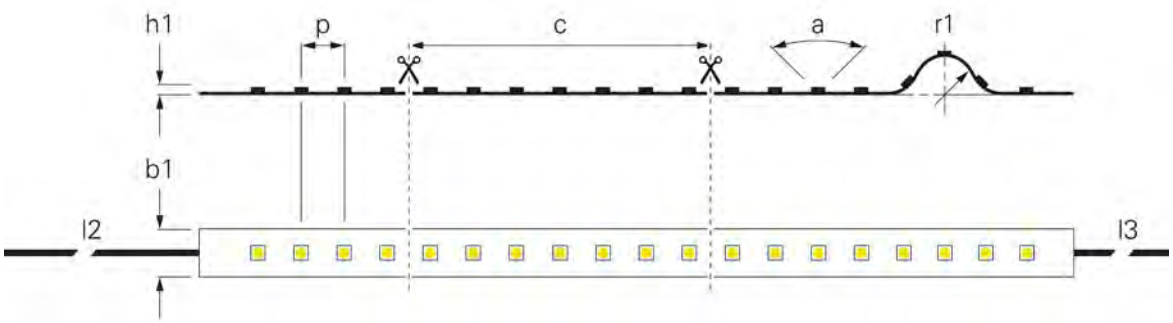

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	20 mm
(h1) Height	2 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Colour Temperature	3000 K
Luminous Efficiency 1m	74.21 lm/W

Luminous Flux 1m	705 lm
Length	10000 mm
Rated Input 1m	9.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	90
Control	Dimmable via optional controller
Working Temperature	-15 to 50 °C
Channels	1

Article		Price
840291	WW	**€ 399.95**

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-10W SLIM IP20

Ra>90

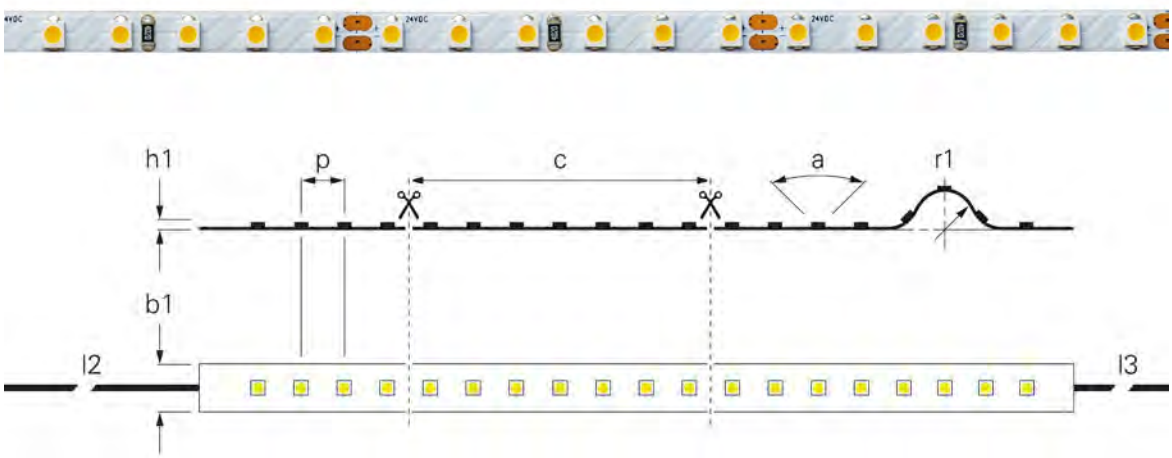

- **high-performance adhesive 3M 9448A**

(p) LED Distance	8.33 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	9.6 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	90
(h1) Height	3 mm	Control	Dimmable via optional controller
(b1) Width	5 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840158	WW	2700 K	80 lm/W	770 lm	**€ 79.95**
840159	WW	3000 K	85 lm/W	820 lm	**€ 79.95**

CV | 1 CH | IP20 | III | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-11W SLIM IP20

Ra>90

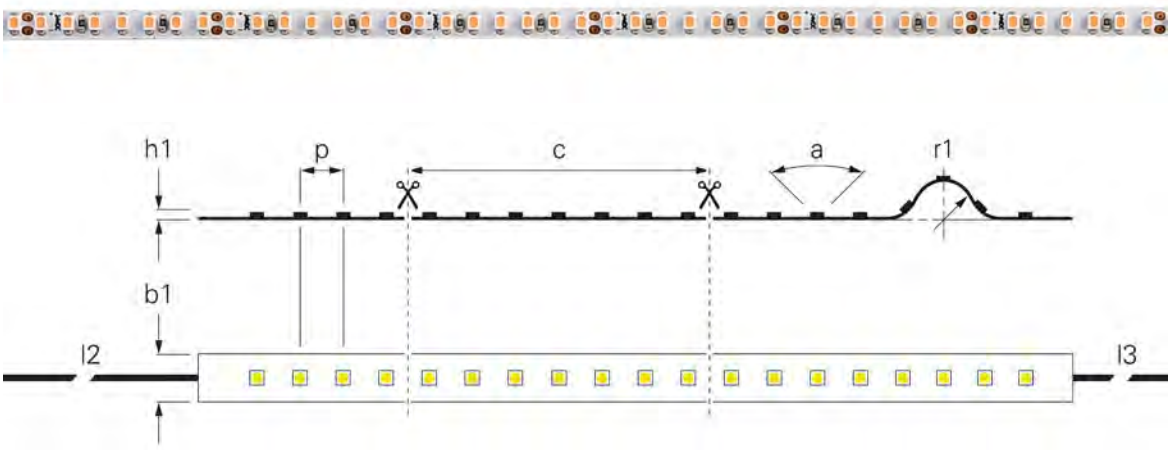

·high-performance adhesive 3M 9448A

(p) LED Distance	3.8 mm	Length	5000 mm
(c) Segment Length	26.3 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	2 mm		
(b1) Width	4 mm	Working Temperature	-15 to 50 °C
(l2) Primary Cable Length	1 m	Channels	1
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	Price
840175	WW	2700 K	90.45 lm/W	995 lm	11.0 W	**€ 169.95**
840210	WW	3000 K	99.09 lm/W	1090 lm	11.0 W	**€ 169.95**
840267	NW	4000 K	95.65 lm/W	1100 lm	11.5 W	**€ 169.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24 V-11 W CCT SLIM IP20

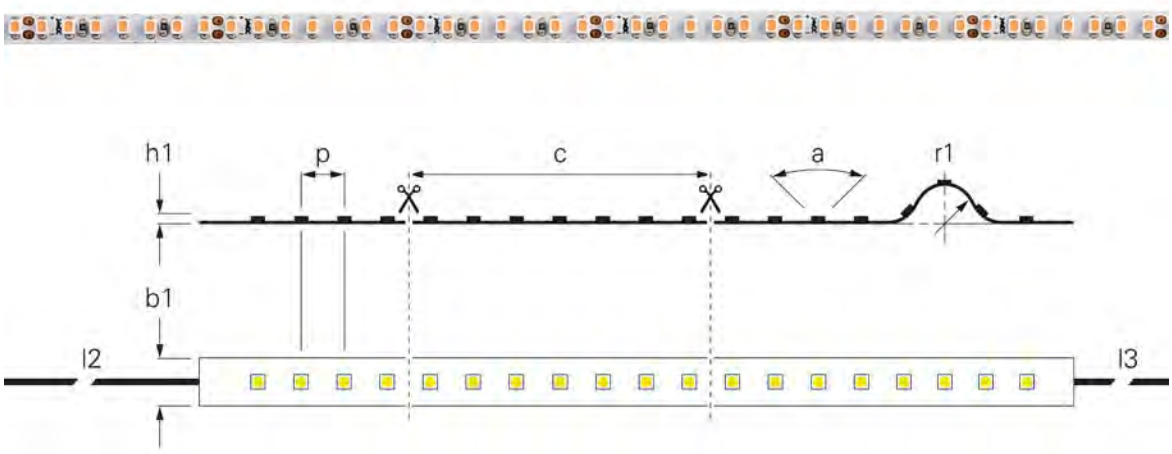

· high-performance adhesive tape 3M 200MP

(p) LED Distance	10.2 mm	Luminous Flux 1m	1025 lm
(c) Segment Length	71.4 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	11 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	1.2 mm	CRI (Ra)	90
(b1) Width	5 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 60 °C
Colour Temperature	3000-6500 K	Channels	2
Luminous Efficiency 1m	93.18 lm/W		

Article	Colour Temperature	Price
840350	WW CW 3000-6500 K	**€ 124.95**

CV | 2 CH | IP20 | III | A ↑ G | E

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-12W SLIM IP65

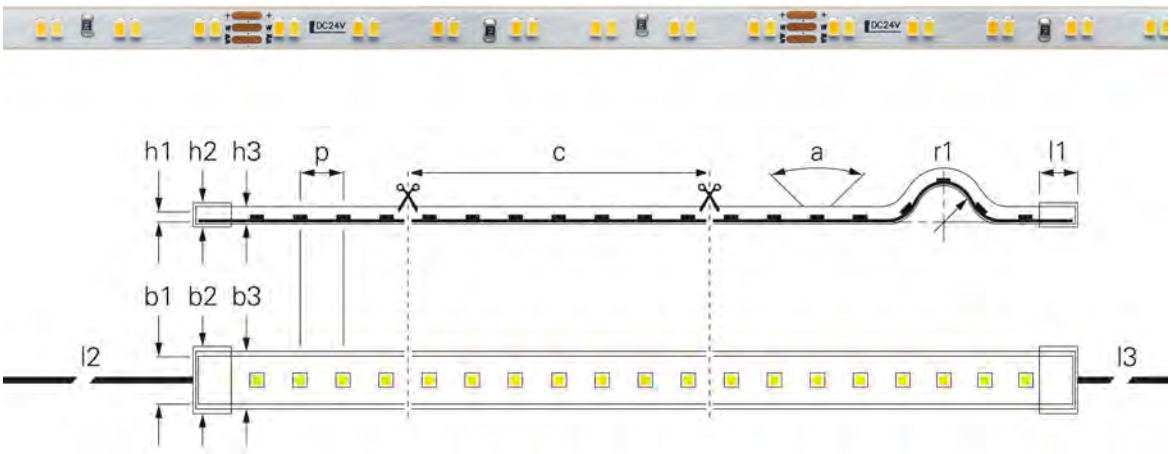

- **Including mounting material**
- **high-performance adhesive tape 3M 200MP**

(p) LED Distance	5.1 mm	Colour Temperature	3000-6500 K
(c) Segment Length	71.4 mm	Luminous Efficiency 1m	85.6 lm/W
(a) Light Beam Angle	120 Degree	Luminous Flux 1m	1070 lm
(r1) Bending Radius min.	50 mm	Length	5000 mm
(h1) Height	5.3 mm	Rated Input 1m	12.5 W
(h2) Height End Cap	5.3 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	3.7 mm	CRI (Ra)	90
(b1) Width	5 mm	Control	Dimmable via optional controller
(b2) Width end cap	10 mm		
(b3) Width Hose	7.4 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10.2 mm	Working Temperature	-10 to 60 °C
(l2) Primary Cable Length	1 m	Channels	2
(l3) Secondary Cable Length	1 m		

Article	Colour Temperature	Price
840349	WW CW 3000-6500 K	**€ 149.95**

CV | 2 CH | IP65 | III | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-11W STANDARD IP20

RGB

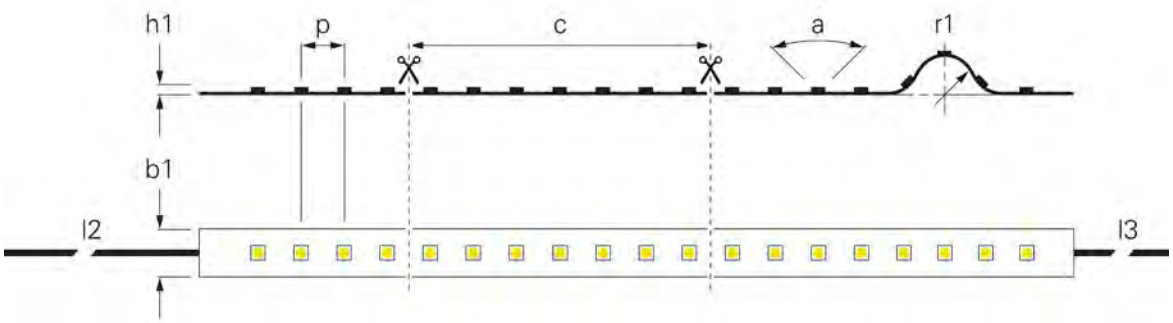

·high-performance adhesive 3M 9448A

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	110 Degree
(r1) Bending Radius min.	20 mm
(h1) Height	2 mm
(b1) Width	5 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	45.45 lm/W

Luminous Flux 1m	500 lm
Length	5000 mm
Rated Input 1m	11 W
Rated Input Voltage	24 V/DC
CRI (Ra)	60
Control	Dimmable via optional controller
Working Temperature	-15 to 50 °C
Channels	3

Article		Price
840276	RGB	**€ 109.95**

CV | 3 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-11W STANDARD IP67

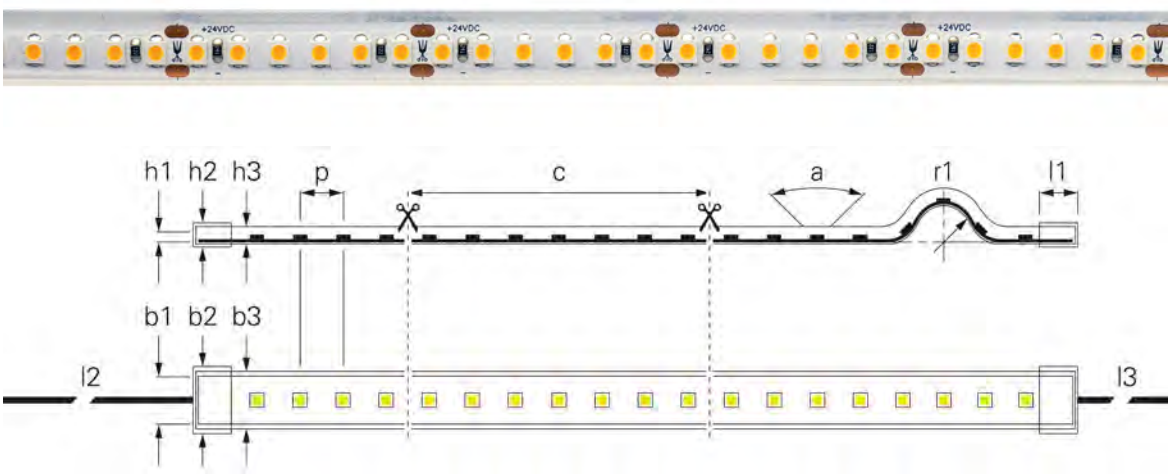

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	5.5 mm	(l2) Primary Cable Length	1 m
(c) Segment Length	33.3 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Length	5000 mm
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	5.5 mm	CRI (Ra)	90
(h2) Height End Cap	6.5 mm	Control	Dimmable via optional controller
(h3) Height Hose	5.5 mm		
(b1) Width	11.5 mm	Type of IP Protection	Silicone hose
(b2) Width end cap	12.5 mm	Working Temperature	-15 to 50 °C
(b3) Width Hose	11.5 mm	Channels	1
(l1) Length End Cap	10 mm		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Rated Input 1m	EEI	Price
840186	WW 2700 K	78.26 lm/W	900 lm	11.5 W	G	**€ 184.95**
840187	WW 3000 K	84.55 lm/W	930 lm	11.0 W	F	**€ 184.95**

CV | 1 CH | IP67 | III

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-13W STANDARD IP20

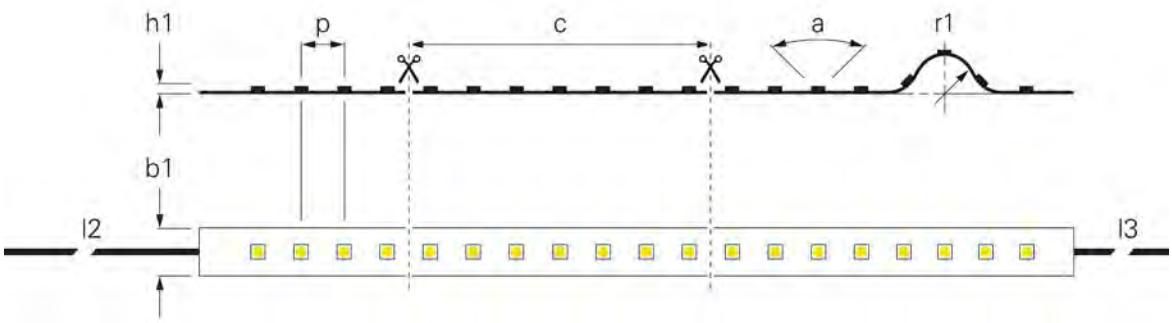

·high-performance adhesive 3M 9448A

(p) LED Distance	16.66 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	20 mm
(h1) Height	3 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	44.62 lm/W

Luminous Flux 1m	580 lm
Length	5000 mm
Rated Input 1m	13 W
Rated Input Voltage	24 V/DC
Control	Dimmable via optional controller
Working Temperature	-15 to 50 °C
Channels	3

Article	Price
840254	**€ 134.95**

CV | 3 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-13W STANDARD IP67

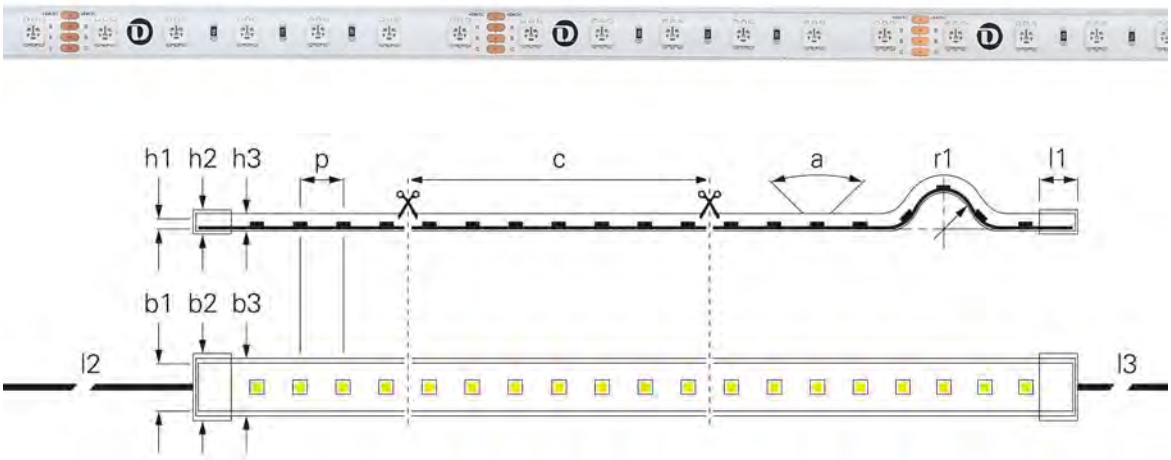

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	16.66 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	6 mm
(b1) Width	13 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	49.6 lm/W

Luminous Flux 1m	670 lm
Length	5000 mm
Rated Input 1m	13.5 W
Rated Input Voltage	24 V/DC
Control	Dimmable via optional controller
Type of IP Protection	Silicone hose
Working Temperature	-15 to 50 °C
Channels	3

Article	Price
840256	**€ 159.95**

CV | 3 CH | IP67 | III

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-14W STANDARD IP20

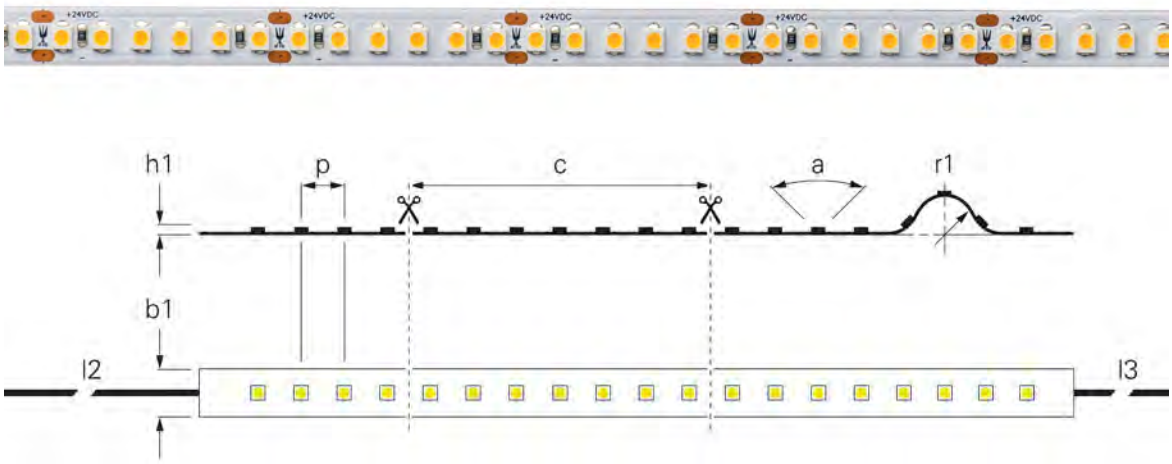

· high-performance adhesive 3M 9448A

(a) Light Beam Angle	120 Degree	Rated Input 1m	14 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(l2) Primary Cable Length	1 m	Control	Dimmable via optional controller
(l3) Secondary Cable Length	1 m		

Article	Colour Temp.	(p) Distance	(c) Length	(h1) Height	(b1) Width	Luminous Flux 1m	Length	EEI	Price
840147	RGB	10.4 mm	83.3 mm	2 mm	10 mm	665 lm	5000 mm		**€ 169.95**
840178	WW 2700 K	5.56 mm	33.4 mm	3 mm	8 mm	1110 lm	5000 mm	A G	**€ 124.95**
840179	WW 3000 K	5.56 mm	33.4 mm	3 mm	8 mm	1100 lm	5000 mm	A G	**€ 124.95**
930512	WW 3000 K	5.56 mm	33.4 mm	3 mm	8 mm	1100 lm	50000 mm	A G	**€ 1169.95**
840180	NW 4000 K	5.56 mm	33.4 mm	3 mm	8 mm	1220 lm	5000 mm	A F	**€ 124.95**

CV | IP20 | III

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-15W STANDARD IP67

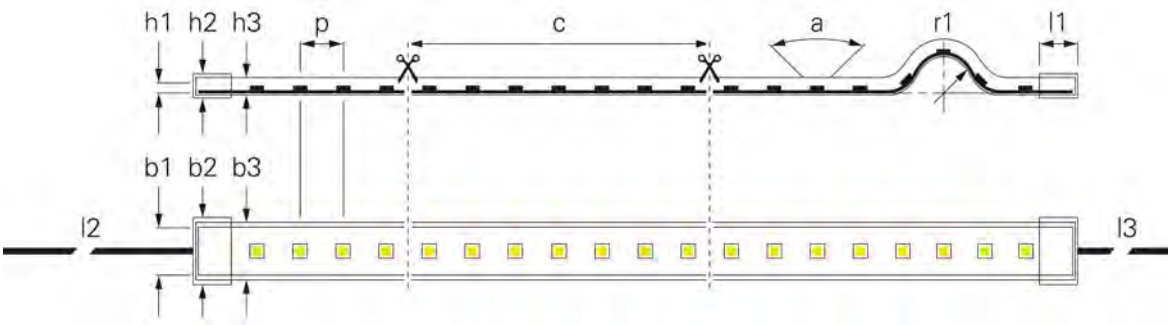

- **Including mounting material**
- **high-performance adhesive 3M 9448A**

(p) LED Distance	16.7 mm
(c) Segment Length	100 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	5.5 mm
(h2) Height End Cap	6.5 mm
(h3) Height Hose	5.5 mm
(b1) Width	14.5 mm
(b2) Width end cap	15.5 mm
(b3) Width Hose	14.5 mm
(l1) Length End Cap	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m

Colour Temperature	3000 K
Luminous Efficiency 1m	49 lm/W
Luminous Flux 1m	740 lm
Length	5000 mm
Rated Input 1m	15 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	Silicone hose
Working Temperature	-15 to 50 °C
Channels	4

Article			Price
840239	RGB	WW	**€ 174.95**

CV | 4 CH | IP67 | III | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24 V-16 W RGBNW STANDARD IP20

RGBNW

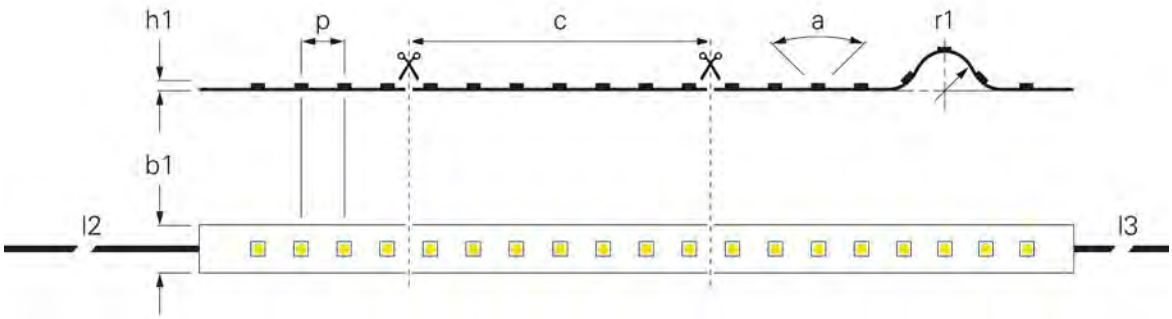

·high-performance adhesive tape 3M 200MP

(p) LED Distance	16.66 mm
(c) Segment Length	166.66 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Colour Temperature	4000 K
Luminous Efficiency 1m	46.97 lm/W

Luminous Flux 1m	775 lm
Length	5000 mm
Rated Input 1m	16.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Working Temperature	-10 to 60 °C
Channels	4

Article		Price
840353	RGB NW	**€ 149.95**

CV | 4 CH | IP20 | III | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-16W RGBWW STANDARD IP20

RGBWW

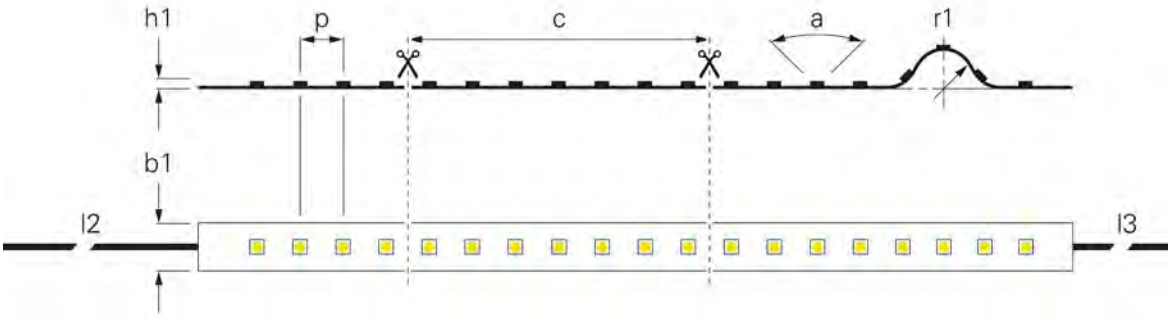

· high-performance adhesive 3M 9448A

(p) LED Distance	16.66 mm	Luminous Efficiency 1m	51.25 lm/W
(c) Segment Length	100 mm	Luminous Flux 1m	820 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	16 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	3 mm	CRI (Ra)	80
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	4
Colour Temperature	3000 K		

Article		Length	Price
840236	RGB WW	5000 mm	**€ 144.95**
930517	RGB WW	50000 mm	**€ 1299.95**

CV | 4 CH | IP20 | III | A ↑ G | G

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-16W STANDARD IP44

IP44 RGBNW

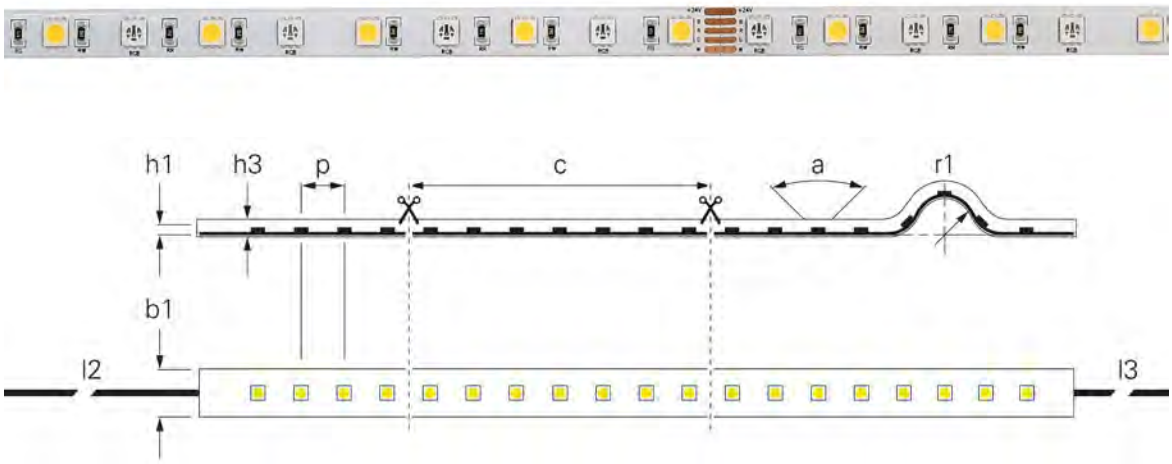

·high-performance adhesive tape 3M 200MP

(p) LED Distance	16.66 mm
(c) Segment Length	166.66 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(b1) Width	10 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Colour Temperature	4000 K
Luminous Efficiency 1m	47.81 lm/W
Luminous Flux 1m	765 lm

Length	5000 mm
Rated Input 1m	16 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	Silicone
Working Temperature	-10 to 60 °C
Channels	4

Article		Price
840373	RGB NW	**€ 159.95**

CV | 4 CH | IP44 | III | A ↑ G | G

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-17W STANDARD IP20

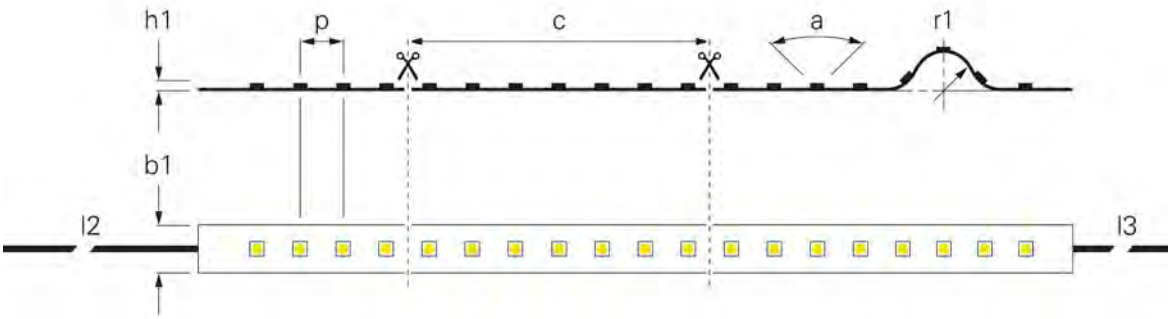

(p) LED Distance	8.33 mm	Luminous Flux 1m	1765 lm
(c) Segment Length	50 mm	Length	5000 mm
(a) Light Beam Angle	120 Degree	Rated Input 1m	17.2 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-10 to 40 °C
Colour Temperature	2700-6500 K	Channels	2
Luminous Efficiency 1m	103 lm/W		

Article	Colour Temperature	Price
840378	WW CW 2700-6500 K	**€ 199.95**

CV | 2 CH | IP20 | III | A ↑ G | F

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-20W POWER IP20

Ra>90

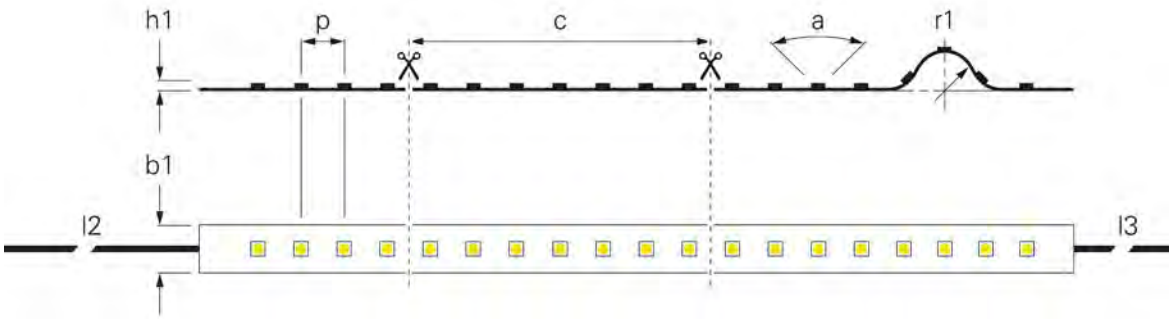

· high-performance adhesive 3M 9448A

(a) Light Beam Angle	120 Degree	Rated Input 1m	20 W
(r1) Bending Radius min.	20 mm	Rated Input Voltage	24 V/DC
(h1) Height	2 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m		
(l3) Secondary Cable Length	1 m	Working Temperature	-15 to 50 °C
Length	5000 mm	Channels	1

Article		Colour Temperature	(p) LED Distance	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	EEI	Price
840192	WW	2700 K	4.16 mm	25 mm	65.68 lm/W	1215 lm	G	**€ 164.95**
840193	WW	3000 K	4.16 mm	25 mm	84.47 lm/W	1605 lm	G	**€ 164.95**
840194	NW	4000 K	4.16 mm	25 mm	88.5 lm/W	1770 lm	F	**€ 164.95**
840124	CW	6000 K	8.33 mm	50 mm	86 lm/W	1720 lm	G	**€ 194.95**

CV | 1 CH | IP20 | III

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-23W POWER IP20

Ra>90

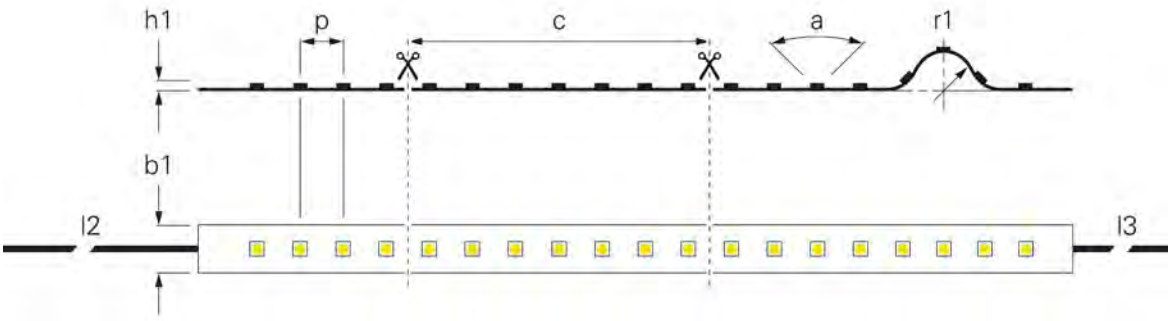

· high-performance adhesive 3M 9448A

(p) LED Distance	6.25 mm	Length	5000 mm
(c) Segment Length	50 mm	Rated Input 1m	23 W
(a) Light Beam Angle	110 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	90
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840331	WW	3000 K	130.9 lm/W	3010 lm	**€ 249.95**
840332	NW	4000 K	136.1 lm/W	3130 lm	**€ 249.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-23W POWER IP44

IP44 Ra>90

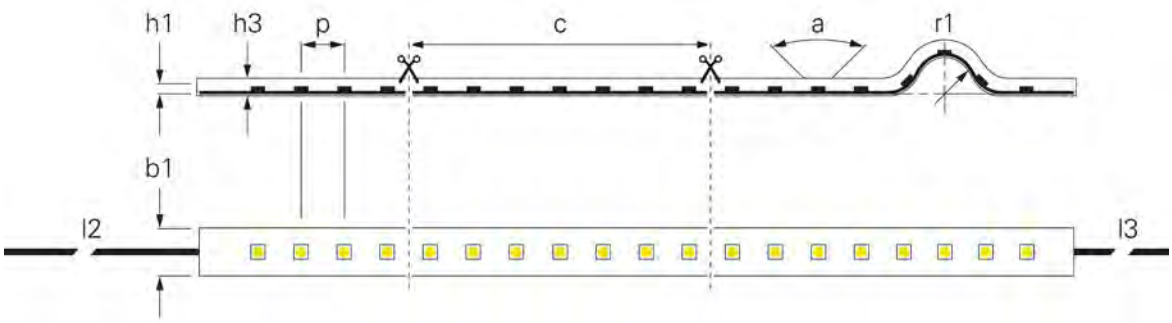

- **high-performance adhesive 3M 9448A**

(p) LED Distance	6.25 mm	Rated Input 1m	23 W
(c) Segment Length	50 mm	Rated Input Voltage	24 V/DC
(a) Light Beam Angle	110 Degree	CRI (Ra)	90
(r1) Bending Radius min.	20 mm	Control	Dimmable via optional controller
(h1) Height	3 mm		
(b1) Width	10 mm	Type of IP Protection	Silicone
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	1
Length	5000 mm		

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840333	WW 3000 K	115.2 lm/W	2650 lm	**€ 259.95**
840334	NW 4000 K	120.9 lm/W	2780 lm	**€ 259.95**

CV | 1 CH | IP44 | III | A ↑ G | E

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24 V-22 W RGBW POWER IP20

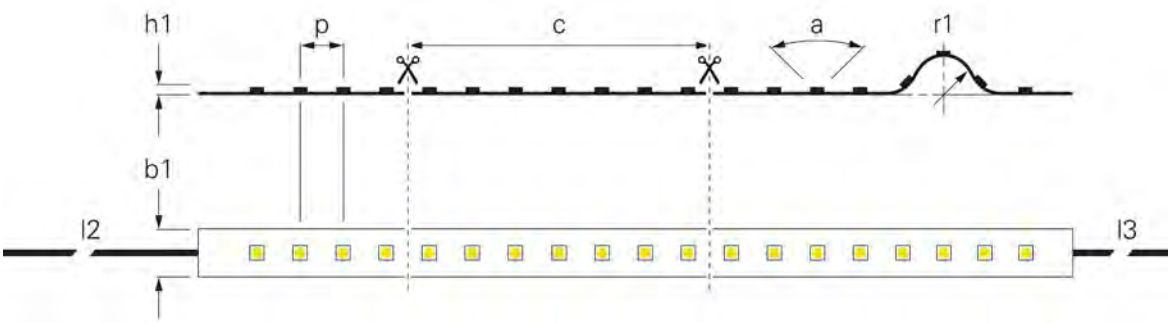

· high-performance adhesive 3M 9448A

(p) LED Distance	10.4 mm	Length	5000 mm
(c) Segment Length	62.5 mm	Rated Input 1m	22 W
(a) Light Beam Angle	110 Degree	Rated Input Voltage	24 V/DC
(r1) Bending Radius min.	20 mm	CRI (Ra)	60
(h1) Height	2 mm	Control	Dimmable via optional controller
(b1) Width	12 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-15 to 50 °C
(l3) Secondary Cable Length	1 m	Channels	4

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Price
840308	RGB WW 3000 K	43.41 lm/W	955 lm	**€ 179.95**
840309	RGB NW 4000 K	44.77 lm/W	985 lm	**€ 179.95**

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 24V-28W POWER PLUS IP20

RGB

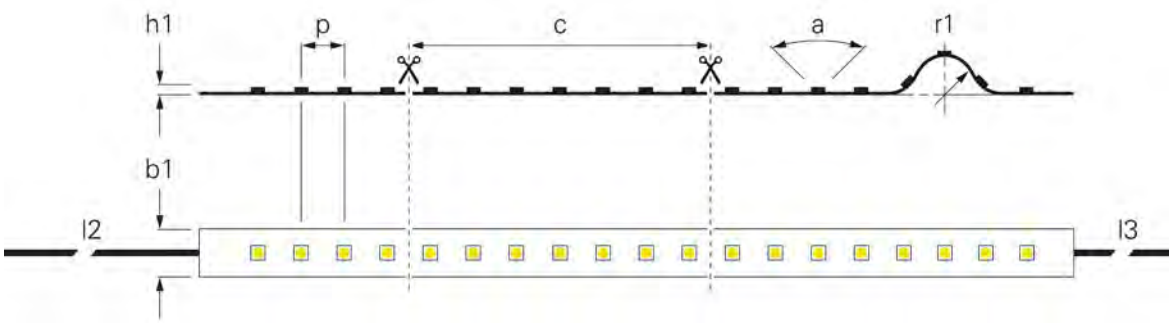

·high-performance adhesive tape 3M 200MP

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2 mm
(b1) Width	12 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m
Luminous Efficiency 1m	37.68 lm/W

Luminous Flux 1m	1055 lm
Length	5000 mm
Rated Input 1m	28 W
Rated Input Voltage	24 V/DC
CRI (Ra)	60
Control	Dimmable via optional controller
Working Temperature	-10 to 60 °C
Channels	3

Article		Price
840352	RGB	**€ 189.95**

CV | 3 CH | IP20

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 24V-28W POWER PLUS IP44

IP44 RGB

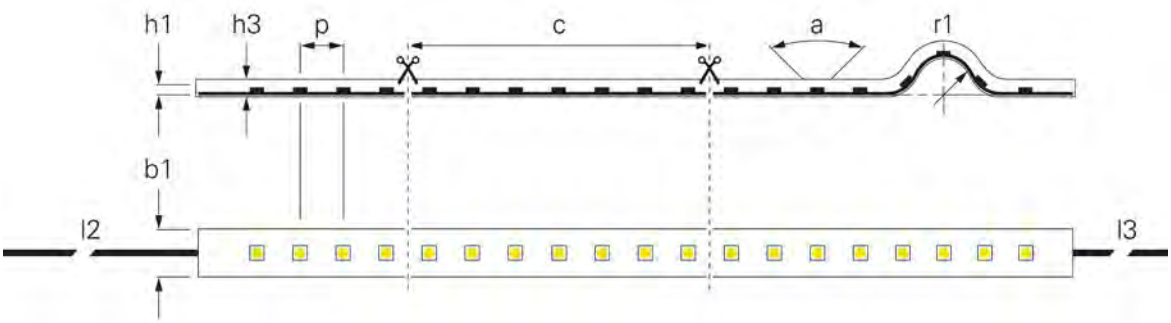

·high-performance adhesive tape 3M 200MP

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2.6 mm
(h2) Height End Cap	3 mm
(b1) Width	12 mm
(b2) Width end cap	12.5 mm
(l1) Length End Cap	15 mm
(l2) Primary Cable Length	1 m
(l3) Secondary Cable Length	1 m

Luminous Efficiency 1m	38 lm/W
Luminous Flux 1m	1045 lm
Length	5000 mm
Rated Input 1m	27.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	60
Control	Dimmable via optional controller
Type of IP Protection	Silicone
Working Temperature	-10 to 60 °C
Channels	3

Article		Price
840351	RGB	**€ 214.95**

CV | 3 CH | IP44 | III

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SIDE VIEW

The LED strip is arranged / installed vertically, allowing the Flex-Stripe to be bent to the left and right.
[Note the minimum bending radius in each case.]

NEON 24V-10W D FLEX LINE MINI SIDE-VIEW IP44

IP44 Ra>90

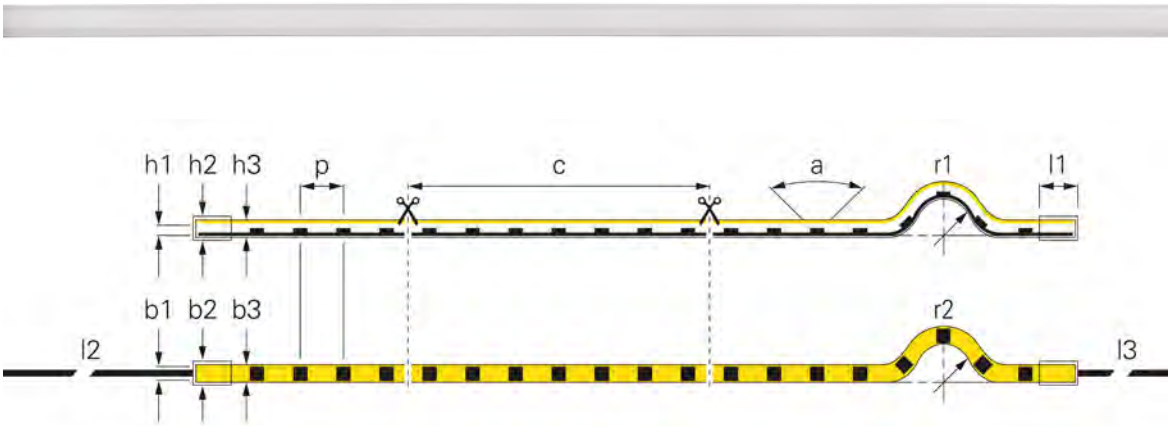

·Including mounting material

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	112 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	12 mm
(b1) Width	6.5 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m
Colour Temperature	3000 K
Luminous Efficiency 1m	30 lm/W

Luminous Flux 1m	285 lm
Length	5000 mm
Rated Input 1m	10 W
Rated Input Voltage	24 V/DC
CRI (Ra)	90
Control	Dimmable via optional controller
Type of IP Protection	Silicone
Working Temperature	-25 to 45 °C
Channels	1

Article		Price
840376	WW	**€ 359.95**

CV | 1 CH | IP44 | III | A ↑ G | G

Accessories

930443	Profile for D Flex Line	**€ 12.95**
930444	Flex profile for D Flex Line	**€ 21.95**
930530	Assembly kit for D Flex Line 6.5 x 12.0 mm	**€ 9.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

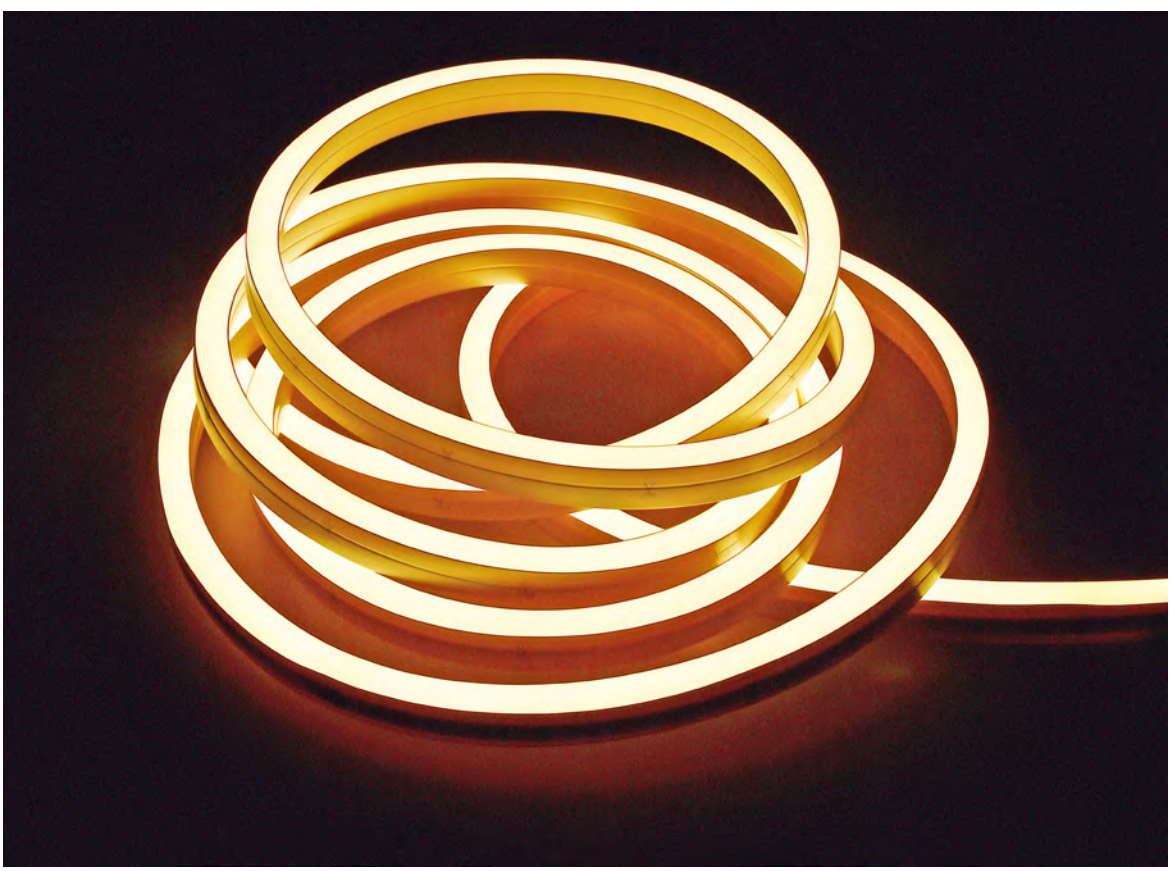

NEON 24V-8W D FLEX LINE MINI SIDE-VIEW IP68

IP68

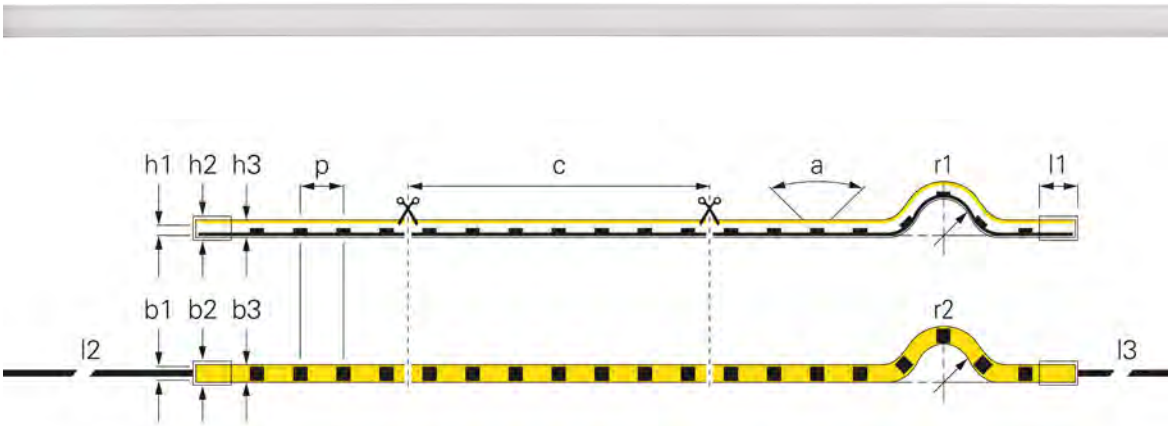

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	112 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	12 mm
(h2) Height End Cap	15 mm
(h3) Height Hose	12 mm
(b1) Width	5 mm
(b2) Width end cap	8 mm
(b3) Width Hose	6 mm
(l1) Length End Cap	12 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m

Colour Temperature	3000 K
Luminous Efficiency 1m	36.88 lm/W
Luminous Flux 1m	295 lm
Length	5000 mm
Rated Input 1m	8 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	1

Article		Price
840283	WW	**€ 559.95**

CV | 1 CH | IP68 max.2m | III | A ↑ G | G

Accessories

930443	Profile for D Flex Line	**€ 12.95**
930444	Flex profile for D Flex Line	**€ 21.95**
930530	Assembly kit for D Flex Line 6.5 x 12.0 mm	**€ 9.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

NEON 24V-10W D FLEX LINE SIDE-VIEW IP68

IP68

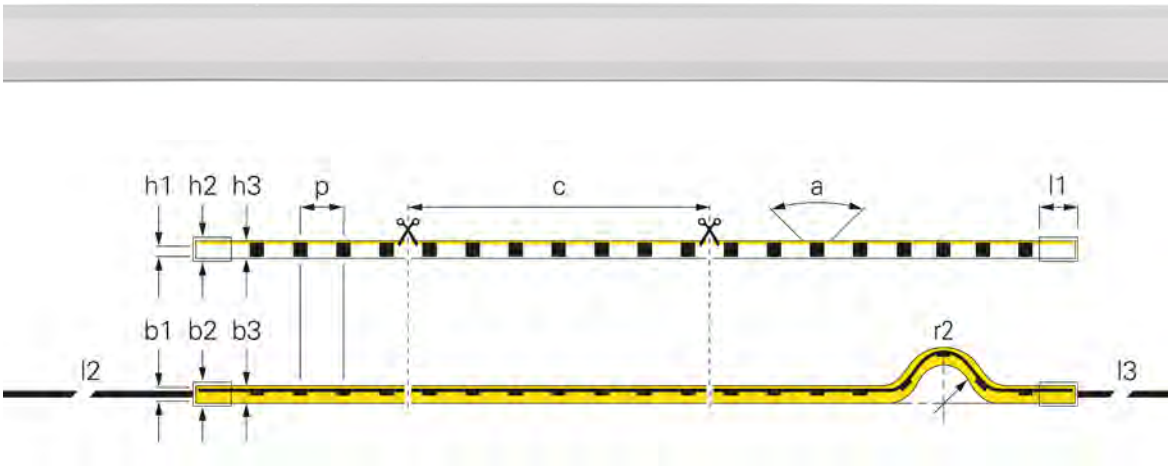

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profiles**
- **UV- and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**
- **Including mounting material**

(a) Light Beam Angle	125 Degree	Colour Temperature	3000 K
(r1) Bending Radius min.	150 mm	Length	5000 mm
(h1) Height	20 mm	Rated Input 1m	10.5 W
(h2) Height End Cap	22.5 mm	Rated Input Voltage	24 V/DC
(h3) Height Hose	20 mm	CRI (Ra)	80
(b2) Width end cap	13 mm	Control	Dimmable via optional controller
(b3) Width Hose	12 mm		
(l1) Length End Cap	11.5 mm	Type of IP Protection	PVC cover
(l2) Primary Cable Length	3 m	Working Temperature	-25 to 45 °C
(l3) Secondary Cable Length	3 m		

Article		(p) LED Distance	(c) Segment Length	Luminous Efficiency 1m	Luminous Flux 1m	Channels	Price
840287	WW	6.94 mm	41,67 mm	35.05 lm/W	368 lm	1	**€ 799.95**
840290	RGB WW	11.91 mm	71,43 mm	20 lm/W	210 lm	4	**€ 799.95**



Accessories

930447	Profile for D Flex Line SIDE	**€ 14.95**
930451	Flex profile for D Flex Line Side	**€ 26.95**
930532	Assembly kit for D Flex Line 12.0 x 20.0 mm	**€ 9.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

TOP VIEW

The LED strip is arranged / installed horizontally, allowing the Flex-Stripe to be bent upwards and downwards.
[Note the minimum bending radius in each case.]

NEON 24V-10W D FLEX LINE TOP-VIEW IP68

IP68

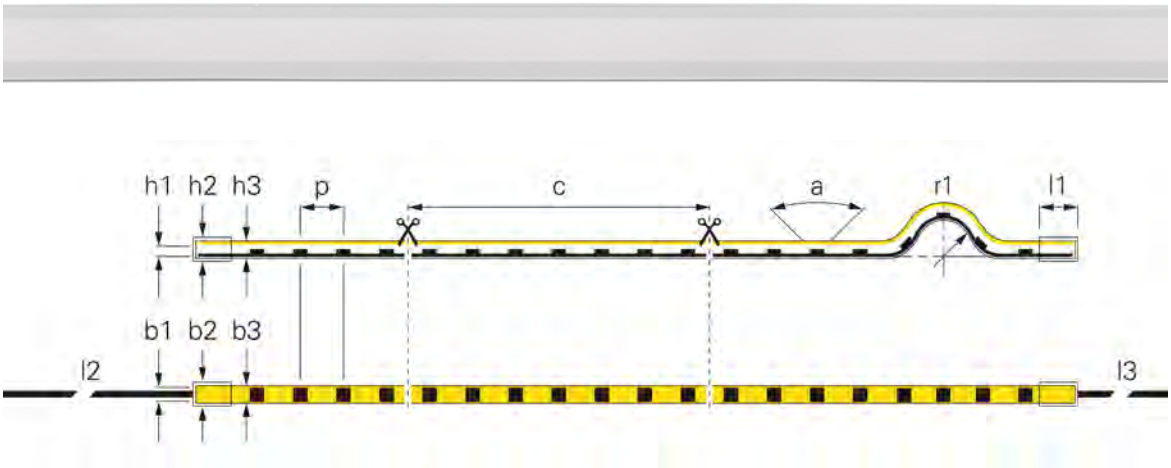

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profiles**
- **UV- and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**
- **Including mounting material**

(p) LED Distance	6.94 mm
(c) Segment Length	41.67 mm
(a) Light Beam Angle	117 Degree
(r1) Bending Radius min.	150 mm
(h1) Height	15 mm
(h2) Height End Cap	18 mm
(h3) Height Hose	15 mm
(b1) Width	10 mm
(b2) Width end cap	18 mm
(b3) Width Hose	16 mm
(l1) Length End Cap	11.5 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m

Colour Temperature	3000 K
Luminous Efficiency 1m	49.05 lm/W
Luminous Flux 1m	515 lm
Length	5000 mm
Rated Input 1m	10.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	1

Article		Price
840288	WW	**€ 749.95**

CV | 1 CH | IP68 max.2m | III | A ↑ G | G

Accessories

930448	Profile for D Flex Line TOP anodised aluminium	**€ 14.95**
930449	Profile for D Flex Line TOP plastic	**€ 11.95**
930533	Assembly kit for D Flex Line 16.0 x 15.0 mm	**€ 10.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

NEON 24 V-10 W D FLEX LINE TOP-VIEW WIDE IP68

IP68

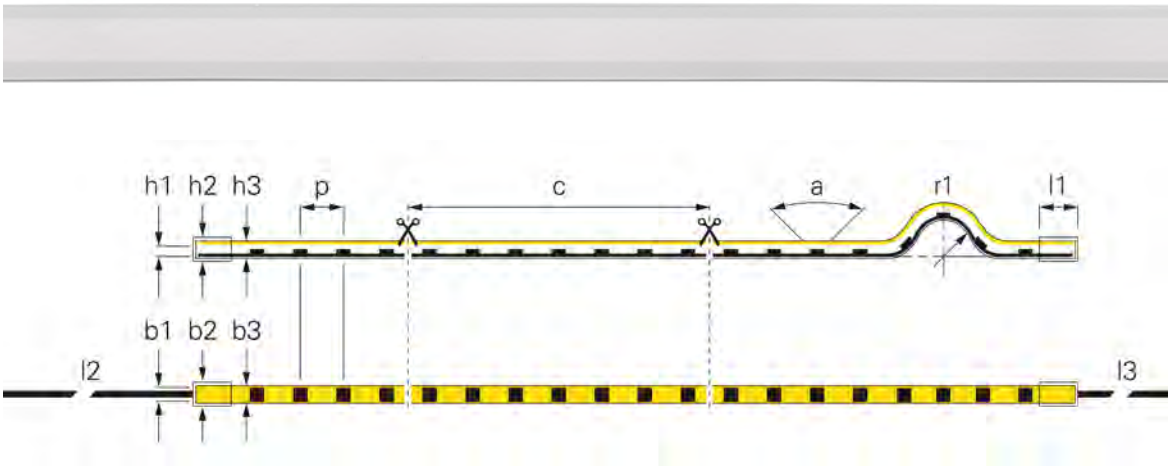

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profiles**
- **UV- and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**
- **Including mounting material**

(p) LED Distance	6.94 mm
(c) Segment Length	41.67 mm
(a) Light Beam Angle	180 Degree
(r1) Bending Radius min.	150 mm
(h1) Height	10 mm
(h2) Height End Cap	12 mm
(h3) Height Hose	10 mm
(b1) Width	8 mm
(b2) Width end cap	12 mm
(b3) Width Hose	10 mm
(l1) Length End Cap	8 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m

Colour Temperature	3000 K
Luminous Efficiency 1m	69.52 lm/W
Luminous Flux 1m	730 lm
Length	5000 mm
Rated Input 1m	10.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	1

Article		Price
840285	WW	**€ 479.95**

CV | 1 CH | IP68 max.2m | A ↑ G | G

Accessories

930445	Profile for D Flex Line MINI plastic	**€ 10.95**
930446	Profile for D Flex Line MINI anodised aluminium	**€ 14.95**
930531	Assembly kit for D Flex Line 10.0 x 10.0 mm	**€ 10.95**

NEON 24 V-10 W RGB D FLEX LINE TOP-VIEW IP68

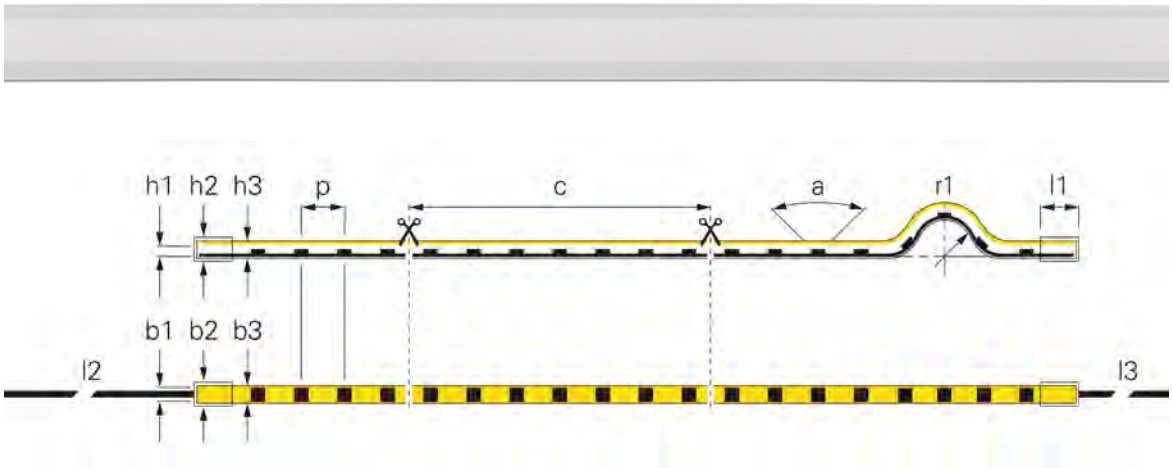

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profile**
- **UV and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**

(p) LED Distance	8.33 mm
(c) Segment Length	50 mm
(a) Light Beam Angle	180 Degree
(r1) Bending Radius min.	150 mm
(h1) Height	10 mm
(h2) Height End Cap	12 mm
(h3) Height Hose	10 mm
(b1) Width	8 mm
(b2) Width end cap	12 mm
(b3) Width Hose	10 mm
(l1) Length End Cap	8 mm
(l2) Primary Cable Length	3 m

(l3) Secondary Cable Length	3 m
Luminous Efficiency 1m	44712 lm/W
Luminous Flux 1m	315 lm
Length	5000 mm
Rated Input 1m	10 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	3

Article		Price
840286	RGB	**€ 519.95**

CV | 3 CH | IP68 max.2m | III

Accessories

930445	Profile for D Flex Line MINI plastic	**€ 10.95**
930446	Profile for D Flex Line MINI anodised aluminium	**€ 14.95**
930531	Assembly kit for D Flex Line 10.0 x 10.0 mm	**€ 10.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

NEON 24 V-10 W RGBW D FLEX LINE TOP-VIEW IP68

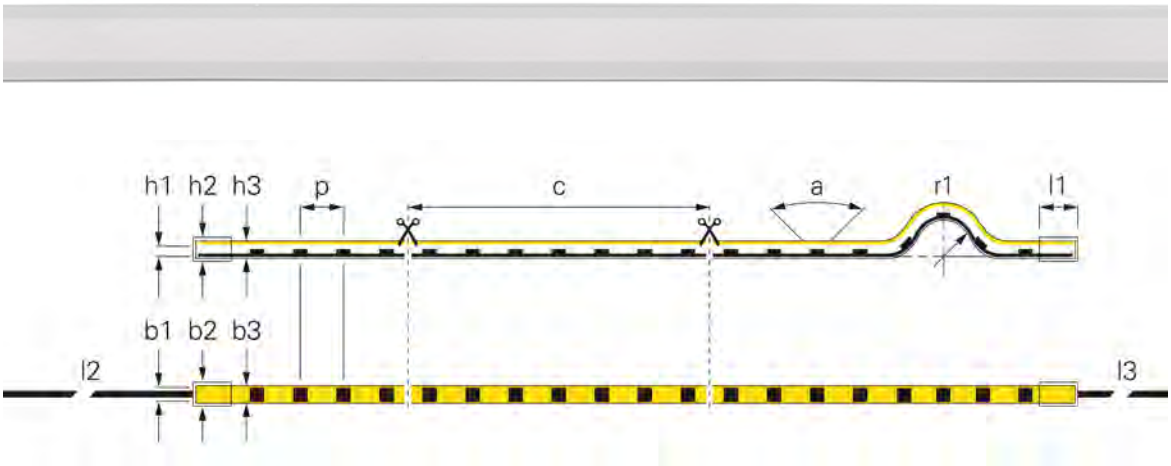

- **Spot-free homogeneous illumination**
- **Very easy installation using adapted profile**
- **UV and salt water-resistant IP68**
- **Ultra-flexible and therefore very versatile**
- **Light-fast polyurethane encapsulation**

(p) LED Distance	11.9 mm
(c) Segment Length	71.43 mm
(a) Light Beam Angle	117 Degree
(r1) Bending Radius min.	150 mm
(h1) Height	15 mm
(h2) Height End Cap	18 mm
(h3) Height Hose	15 mm
(b1) Width	12 mm
(b2) Width end cap	18 mm
(b3) Width Hose	16 mm
(l1) Length End Cap	11.5 mm
(l2) Primary Cable Length	3 m
(l3) Secondary Cable Length	3 m

Colour Temperature	3000 K
Luminous Efficiency 1m	30.48 lm/W
Luminous Flux 1m	320 lm
Length	5000 mm
Rated Input 1m	10.5 W
Rated Input Voltage	24 V/DC
CRI (Ra)	80
Control	Dimmable via optional controller
Type of IP Protection	PVC cover
Working Temperature	-25 to 45 °C
Channels	4

Article		Price
840289	RGB WW	**€ 779.95**

CV | 4 CH | IP68 max.2m | III | A ↑ G | G

Accessories

930448	Profile for D Flex Line TOP anodised aluminium	**€ 14.95**
930449	Profile for D Flex Line TOP plastic	**€ 11.95**
930533	Assembly kit for D Flex Line 16.0 x 15.0 mm	**€ 10.95**
930593	Gel adhesive for bonding the end caps 3 g	**€ 5.95**

NEON 24V-8W OMNIFLEX MINI IP67

The OMNIFLEX 24 V 8W IP67 LED strip is available in three different light colors [2,700 K, 3,000 K, 4,000 K]. With a length of 5 meters, it enables flexible use in different areas. Uniform illumination is guaranteed thanks to the point-free light distribution. The very small bending radii in all directions allow a great deal of design freedom when creating shapes. Straight lines are also no problem. All variants are possible thanks to the extensive range of accessories. With a primary and secondary feed of 300 cm each, flexible installation is guaranteed. Thanks to its salt water and UV resistance and IP67 protection rating, the OMNIFLEX LED strip is also ideal for outdoor use.

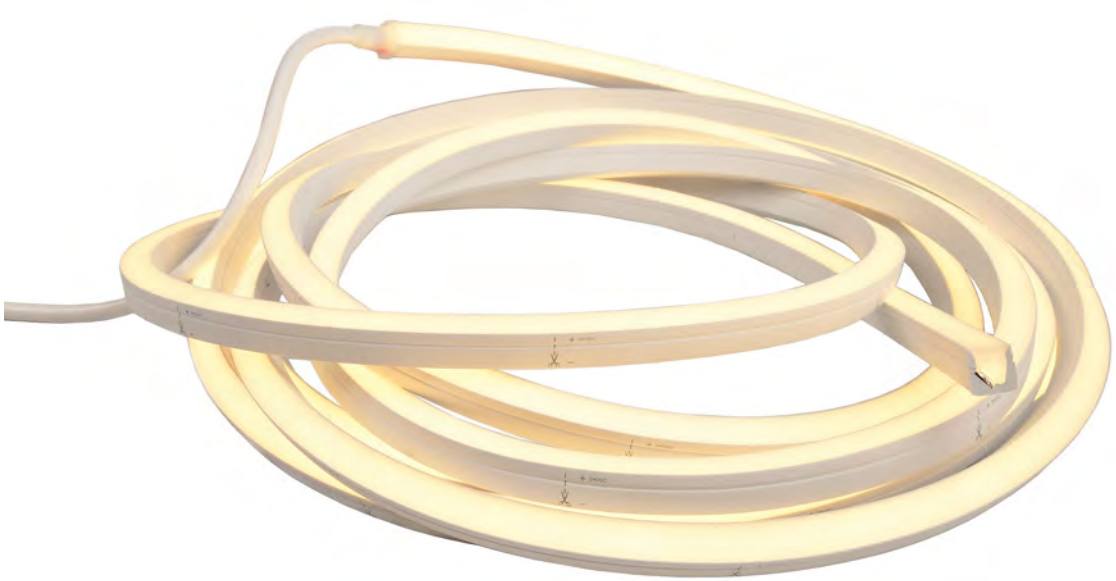

NEON 24V-8W OMNIFLEX MINI IP67

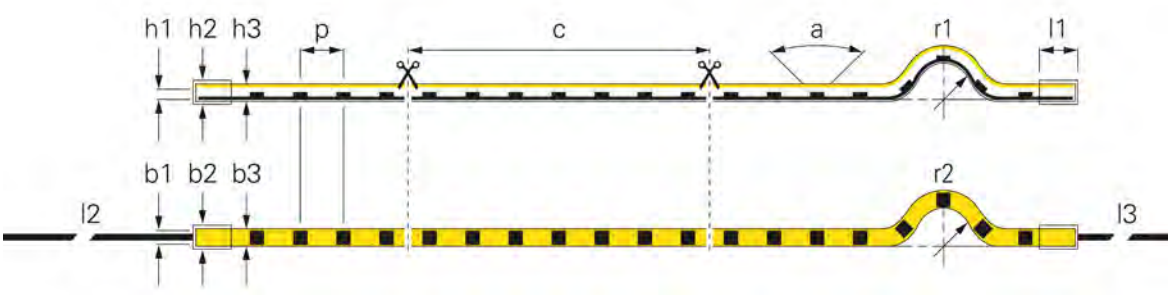

- **Spot-free light pattern for homogeneous illumination**
- **Neon effect**
- **Small bending radius in all directions provides a great deal of freedom**
- **Minimum bending radius to the front: 60 mm/to the side: 100 mm**
- **300 cm long primary and secondary infeed**
- **UV- and salt water-resistant**
- **A comprehensive range of accessories enables you to customise your design**
- **Including mounting material**

(p) LED Distance	6.25 mm	(l2) Primary Cable Length	3 m
(c) Segment Length	100 mm	(l3) Secondary Cable Length	3 m
(a) Light Beam Angle	120 Degree	Length	5000 mm
(r1) Bending Radius min.	100 mm	Rated Input 1m	8 W
(r2) Bending Radius Left / Right	60 mm	Rated Input Voltage	24 V/DC
(h1) Height	10 mm	CRI (Ra)	80
(h2) Height End Cap	10 mm	Control	Dimmable via optional controller
(h3) Height Hose	10 mm		
(b1) Width	10 mm	Type of IP Protection	Silicone hose
(b2) Width end cap	10 mm	Working Temperature	-10 to 55 °C
(b3) Width Hose	10 mm	Channels	1
(l1) Length End Cap	10 mm		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	EEI	Price
840417	WW	2700 K	90 lm/W	720 lm	G	**€ 299.95**
840418	WW	3000 K	93 lm/W	744 lm	G	**€ 299.95**
840419	NW	4000 K	100 lm/W	800 lm	F	**€ 299.95**

CV | 1 CH | IP67 | III

Accessories

930846	Assembly clamps set of 10 pieces for neon Omniflex Mini	**€ 4.95**
930847	Aluminium profile 1 m for neon Omniflex Mini	**€ 9.95**
930849	Flexible stainless steel profile 5 m for neon Omniflex Mini	**€ 69.95**

48V LED STRIPES

Our new LED stripes in 48V technology offer users numerous advantages. The key advantage: Compared to 12V and 24V stripes, 48V stripes allow longer running lengths. By comparison, conventional LED stripes with lower output voltage require a new feed after only 2.5 metres [single-sided feed] or 5 metres [feed from both sides], for continuous operation. LED stripes with 48V can be used up to a length of 25 metres [single-sided feed] or feed] or 50 metres [feed on both sides] - perfect for lighting coves, long corridors and simplified integration into existing installations, that only allow a single-sided feed.

Advantages of 48V LED stripes

- 48V = lower current
- 48V = longer running length
- 48V = thinner wire cross-sections
- 48V = faster installation
- 48V = more versatile applications
- 48V = lower brightness drop

In addition to the advantages mentioned above, our new 48V LED stripes have a very long service life of up to 75,000h for L70B50 and 50,000h for L80B10. Thanks to reel-to-reel production, the 48V LED stripes have no soldered joints. As we have set ourselves the goal to become climate-neutral, the LED stripes are packaged in an environmentally friendly paper-based packaging.

In addition to the new 48V LED stripes, we of course also offer accessories in the form of power supply units and controllers for the relevant control protocols [RF, DALI, KNX etc.] in order to cover all potential future applications for 48V stripes.

Photo: Daniel Vieser . Architectural photography, Karlsruhe

SMD 48V-10W LONG RUN CCT IP20

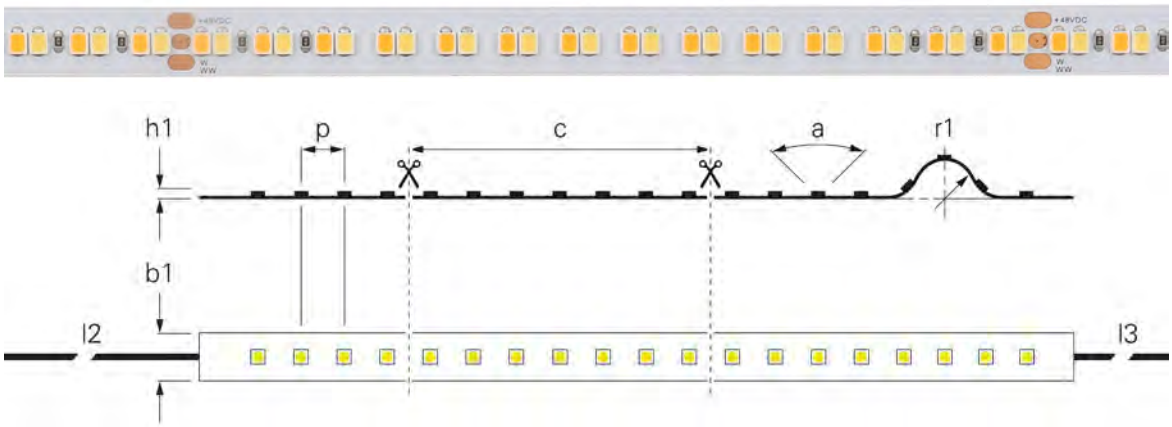

(p) LED Distance	4.46 mm	Luminous Efficiency 1m	120 lm/W
(c) Segment Length	125 mm	Luminous Flux 1m	1200 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	10 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	2.5 mm	CRI (Ra)	90
(b1) Width	10 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	2
Colour Temperature	2700-6500 K		

Article		Length	Price
840438	WW CW	5000 mm	**€ 194.95**
840434	WW CW	15000 mm	**€ 584.95**
840436	WW CW	50000 mm	**€ 1949.95**

CV | 2 CH | IP20 | III | A ↑ G | E

Power supply units
You can find the right power supply unit in various designs and with the required voltage and power in the »Power supply units« section.

SMD 48V-10W LONG RUN CCT IP67

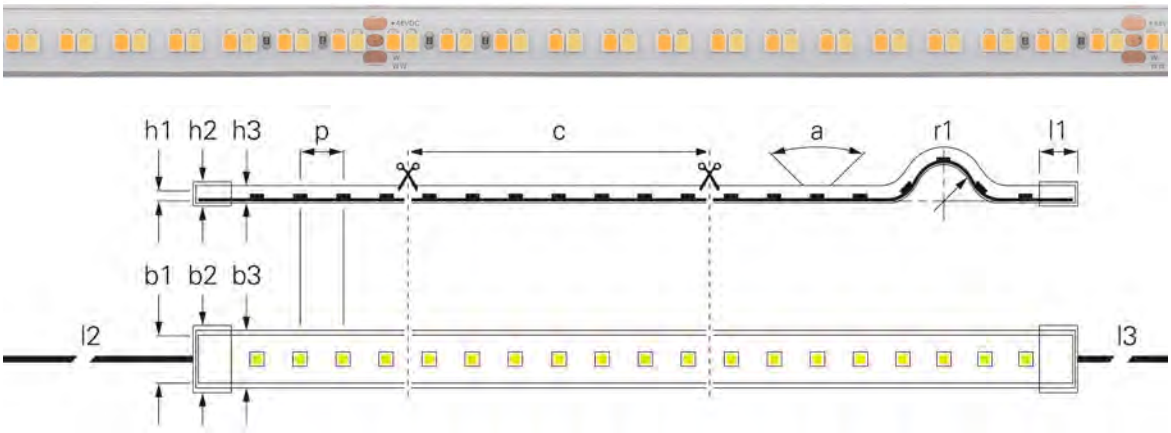

(p) LED Distance	4.46 mm
(c) Segment Length	125 mm
(a) Light Beam Angle	120 Degree
(r1) Bending Radius min.	50 mm
(h1) Height	2.5 mm
(h2) Height End Cap	6.5 mm
(h3) Height Hose	5 mm
(b1) Width	10 mm
(b2) Width end cap	14.2 mm
(b3) Width Hose	12 mm
(l1) Length End Cap	10 mm
(l2) Primary Cable Length	1 m

(l3) Secondary Cable Length	1 m
Colour Temperature	2700-6500 K
Luminous Efficiency 1m	110 lm/W
Luminous Flux 1m	1100 lm
Rated Input 1m	10 W
Rated Input Voltage	48 V/DC
CRI (Ra)	90
Control	Dimmable via optional controller
Type of IP Protection	Silicone hose
Working Temperature	-10 to 55 °C
Channels	2

Article		Length	Price
840439	WW CW	5000 mm	**€ 214.95**
840435	WW CW	15000 mm	**€ 644.95**
840437	WW CW	50000 mm	**€ 2149.95**

CV | 2 CH | IP67 | III | A ↑ G | E

SMD 48V-10W LONG RUN RGB+CCT IP20

Ra>90 RGB+CCT SDCM<3

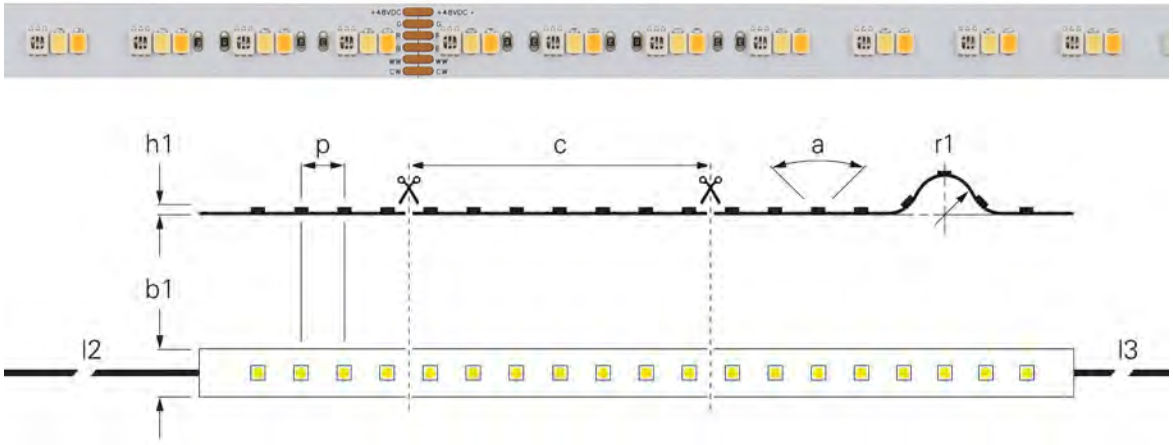

(p) LED Distance	5.56 mm	Luminous Efficiency 1m	80 lm/W
(c) Segment Length	167 mm	Luminous Flux 1m	800 lm
(a) Light Beam Angle	120 Degree	Rated Input 1m	10 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	2.5 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	5
Colour Temperature	2700-6500 K		

Article		Length	Price
840452	RGB WW CW	5000 mm	**€ 249.95**
840448	RGB WW CW	15000 mm	**€ 749.95**
840450	RGB WW CW	50000 mm	**€ 2499.95**

CV | 5 CH | IP20 | III | A ↑ G E

Aluminium profiles
In the »Aluminum profiles« section you will find the right profile for every application with various covers and installation options.

SMD 48V-10W LONG RUN RGB+CCT IP67

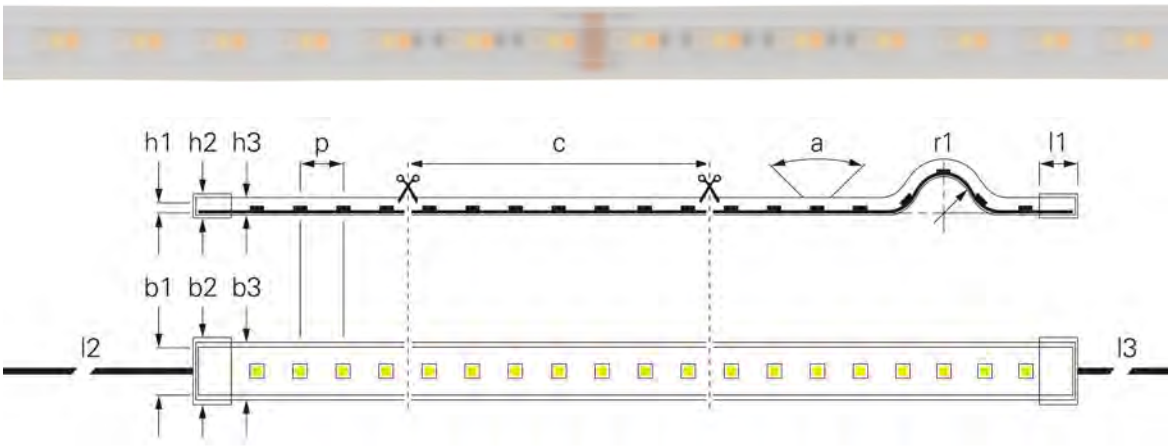

(p) LED Distance	5.56 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	167 mm	Colour Temperature	2700-6500 K
(a) Light Beam Angle	120 Degree	Luminous Efficiency 1m	75 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	750 lm
(h1) Height	2.5 mm	Rated Input 1m	10 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	48 V/DC
(h3) Height Hose	6 mm	CRI (Ra)	90
(b1) Width	12 mm	Control	Dimmable via optional controller
(b2) Width end cap	16.5 mm		
(b3) Width Hose	14.5 mm	Type of IP Protection	Silicone hose
(l1) Length End Cap	10 mm	Working Temperature	-10 to 55 °C
(l2) Primary Cable Length	1 m	Channels	5

Article		Length	Price
840453	RGB WW CW	5000 mm	**€ 274.95**
840449	RGB WW CW	15000 mm	**€ 824.95**
840451	RGB WW CW	50000 mm	**€ 2749.95**

CV | 5 CH | IP67 | III | A ↑ G | F

SMD 48V-10W LONG RUN RGB+W IP20

Ra>90 SDCM<3

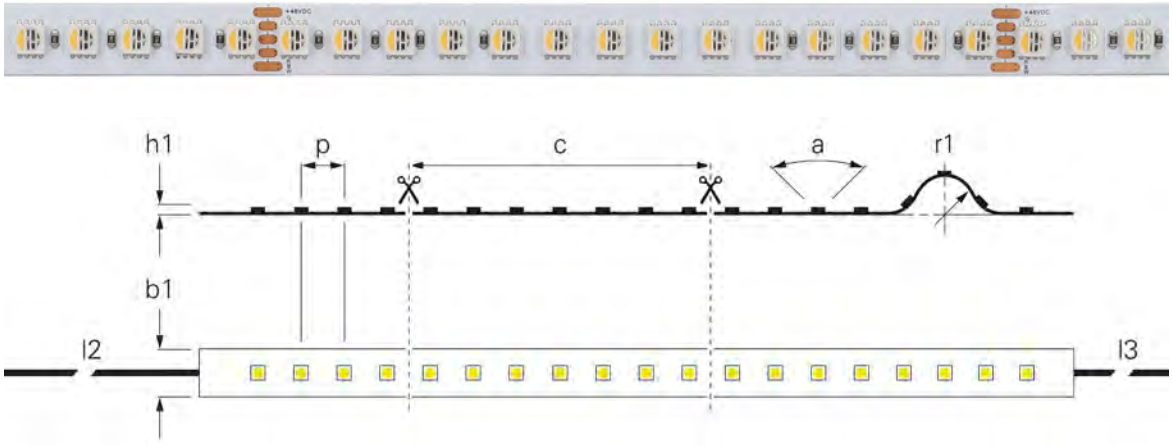

(p) LED Distance	8.9 mm	Rated Input 1m	10 W
(c) Segment Length	125 mm	Rated Input Voltage	48 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2.5 mm		
(b1) Width	12 mm	Working Temperature	-10 to 55 °C
(l2) Primary Cable Length	1 m	Channels	4
(l3) Secondary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840458	RGB WW	3000 K	66 lm/W	660 lm	5000 mm	G	**€ 249.95**
840454	RGB WW	3000 K	66 lm/W	660 lm	15000 mm	G	**€ 749.95**
840456	RGB WW	3000 K	66 lm/W	660 lm	50000 mm	G	**€ 2499.95**
840464	RGB NW	4000 K	70 lm/W	700 lm	5000 mm	F	**€ 249.95**
840460	RGB NW	4000 K	70 lm/W	700 lm	15000 mm	F	**€ 749.95**
840462	RGB NW	4000 K	70 lm/W	700 lm	50000 mm	F	**€ 2499.95**

CV | 4 CH | IP20 | III

SMD 48V-10W LONG RUN RGB+W IP67

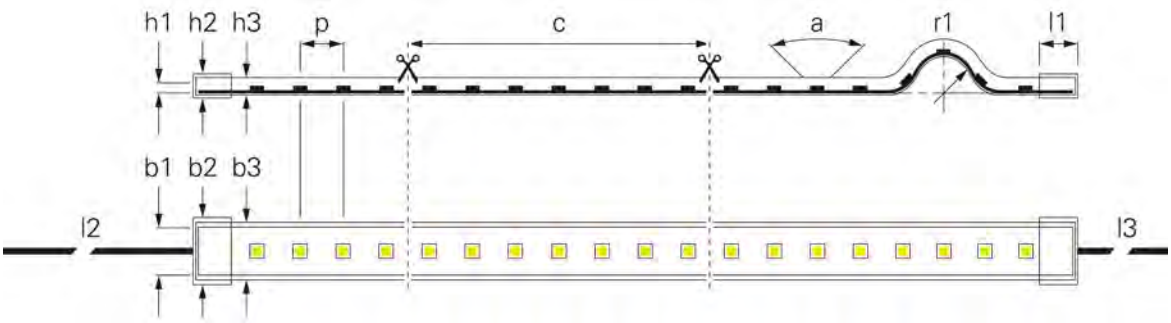

(c) Segment Length	125 mm	(l2) Primary Cable Length	1 m
(a) Light Beam Angle	120 Degree	(l3) Secondary Cable Length	1 m
(r1) Bending Radius min.	50 mm	Rated Input 1m	10 W
(h1) Height	2.5 mm	Rated Input Voltage	48 V/DC
(h2) Height End Cap	6.5 mm	CRI (Ra)	90
(h3) Height Hose	6 mm	Control	Dimmable via optional controller
(b1) Width	14.5 mm	Type of IP Protection	Silicone hose
(b2) Width end cap	16.5 mm	Working Temperature	-10 to 55 °C
(b3) Width Hose	14.5 mm	Channels	4
(l1) Length End Cap	10 mm		

Article	Colour Temperature	(p) LED Distance	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840459	RGB WW 3000 K	8.9 mm	60 lm/W	600 lm	5000 mm	**€ 274.95**
840455	RGB WW 3000 K	8.9 mm	60 lm/W	600 lm	15000 mm	**€ 824.95**
840457	RGB WW 3000 K	8.9 mm	60 lm/W	600 lm	50000 mm	**€ 2749.95**
840463	RGB NW 4000 K	5.5 mm	65 lm/W	650 lm	50000 mm	**€ 2749.95**
840465	RGB NW 4000 K	8.9 mm	65 lm/W	650 lm	5000 mm	**€ 274.95**
840461	RGB NW 4000 K	8.9 mm	65 lm/W	650 lm	15000 mm	**€ 824.95**

SMD 48V-10W LONG RUN RGB IP20

RGB

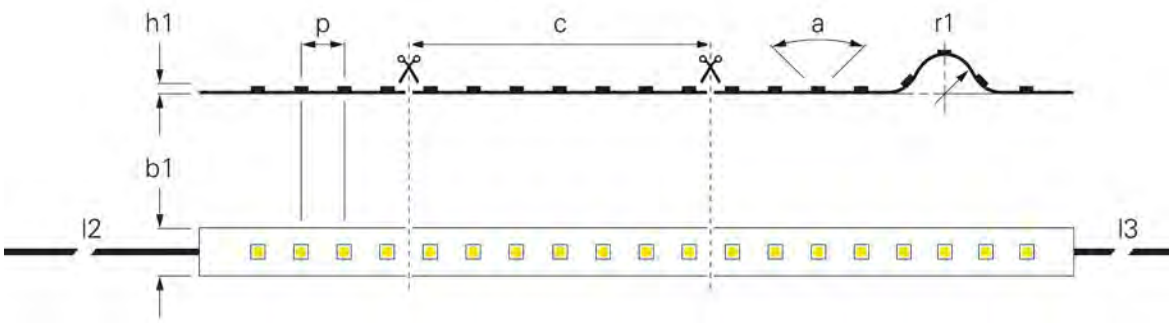

(p) LED Distance	7.14 mm	Luminous Flux 1m	550 lm
(c) Segment Length	100 mm	Rated Input 1m	10 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	65
(h1) Height	2.5 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	3
Luminous Efficiency 1m	55 lm/W		

Article		Length	Price
840446	RGB	5000 mm	**€ 134.95**
840399	RGB	15000 mm	**€ 399.95**
840407	RGB	50000 mm	**€ 1329.95**

CV | 3 CH | IP20 | III

SMD 48V-10W LONG RUN RGB IP67

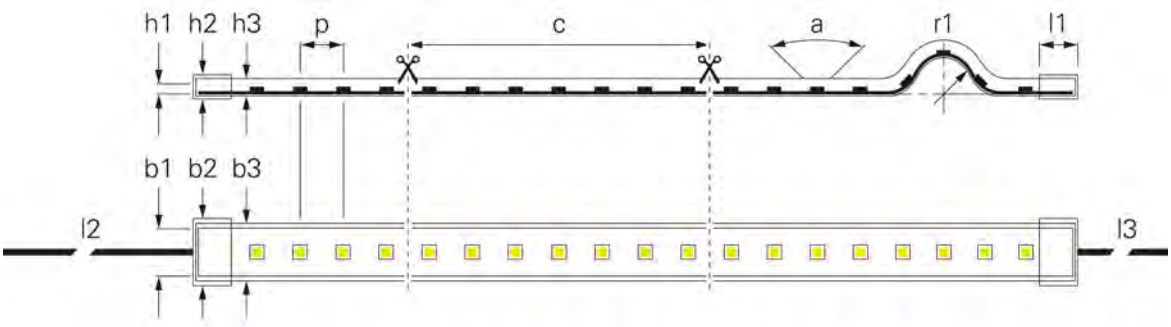

(p) LED Distance	7.14 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Luminous Efficiency 1m	51 lm/W
(r1) Bending Radius min.	50 mm	Luminous Flux 1m	510 lm
(h1) Height	2.5 mm	Rated Input 1m	10 W
(h2) Height End Cap	6.5 mm	Rated Input Voltage	48 V/DC
(h3) Height Hose	4.5 mm	CRI (Ra)	65
(b1) Width	10 mm	Control	Dimmable via optional controller
(b2) Width end cap	14.2 mm		
(b3) Width Hose	12 mm	Working Temperature	-10 to 55 °C
(l1) Length End Cap	10 mm	Channels	3
(l2) Primary Cable Length	1 m		

Article	(c) Segment Length	Length	Type of IP Protection	Price
840400	100 mm	15000 mm	Silicone hose	**€ 459.95**
840408	100 mm	50000 mm	Silicone hose	**€ 1529.95**
840447	125 mm	5000 mm		**€ 149.95**

CV | 3 CH | IP67 | III

SMD 48V-10W LONG RUN SINGLE IP20

Ra>90 SDCM<3

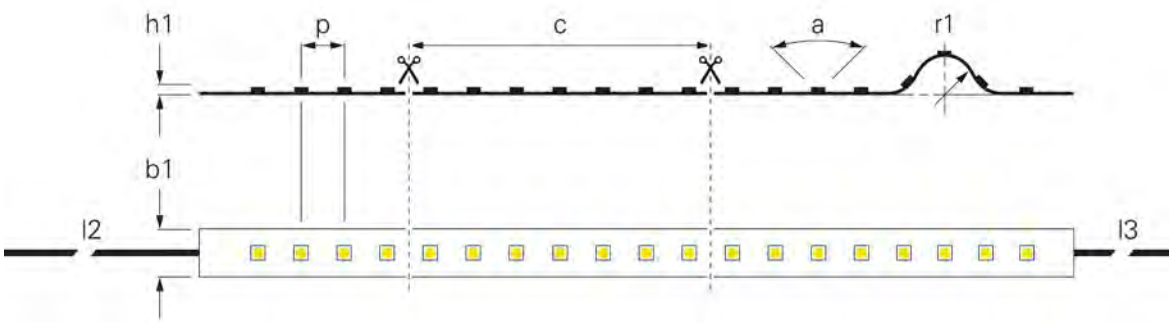

(p) LED Distance	7.14 mm	Rated Input 1m	10 W
(c) Segment Length	100 mm	Rated Input Voltage	48 V/DC
(a) Light Beam Angle	120 Degree	CRI (Ra)	90
(r1) Bending Radius min.	50 mm	Control	Dimmable via optional controller
(h1) Height	2.5 mm		
(l2) Primary Cable Length	1 m	Working Temperature	-10 to 55 °C
(l3) Secondary Cable Length	1 m	Channels	1

Article		Colour Temperature	(b1) Width	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840440	WW	2700 K	10 mm	121 lm/W	1210 lm	5000 mm	F	**€ 109.95**
840393	WW	2700 K	10 mm	121 lm/W	1210 lm	15000 mm	F	**€ 339.95**
840401	WW	2700 K	10 mm	121 lm/W	1210 lm	50000 mm	F	**€ 1129.95**
840394	WW	3000 K	10 mm	124 lm/W	1240 lm	15000 mm	F	**€ 339.95**
840402	WW	3000 K	10 mm	124 lm/W	1240 lm	50000 mm	F	**€ 1129.95**
840442	WW	3000 K	12 mm	124 lm/W	1240 lm	5000 mm	F	**€ 109.95**
840395	NW	4000 K	10 mm	130 lm/W	1300 lm	15000 mm	E	**€ 339.95**
840403	NW	4000 K	10 mm	130 lm/W	1300 lm	50000 mm	E	**€ 1129.95**
840444	NW	4000 K	12 mm	130 lm/W	1300 lm	5000 mm	E	**€ 109.95**

CV | 1 CH | IP20 | III

SMD 48V-10W LONG RUN SINGLE IP67

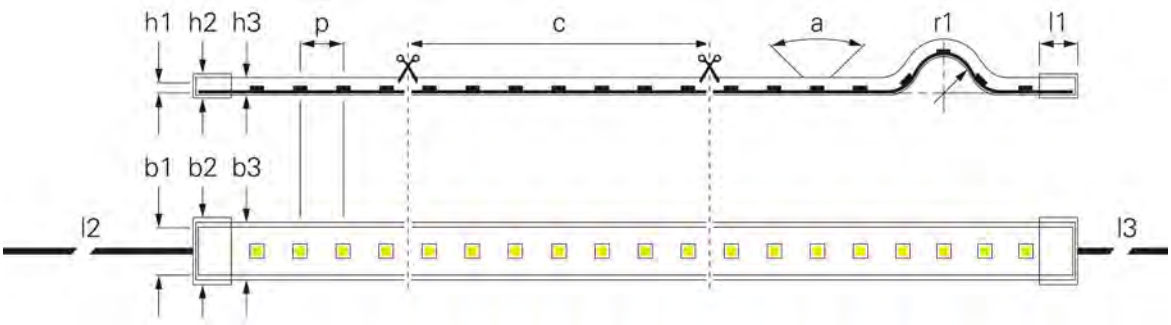

- **Ideal for coved lighting and long run lengths**
- **Up to 50 m in single section with single-/double-sided infeed**
- **3M 300 LSE [IP20] strong adhesive tape/3M VHB 5604A with primer pre-treatment [IP67]**

(p) LED Distance	7.14 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	100 mm	Rated Input 1m	10 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	90
(h1) Height	2.5 mm	Control	Dimmable via optional controller
(h2) Height End Cap	6.5 mm		
(h3) Height Hose	4.5 mm	Type of IP Protection	Silicone hose
(b1) Width	10 mm	Working Temperature	-10 to 55 °C
(l1) Length End Cap	10 mm	Channels	1
(l2) Primary Cable Length	1 m		

Article	Colour Temp.	(b2) Width	(b3) Width Hose	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840396	WW 2700 K	14.2 mm	12 mm	109 lm/W	1090 lm	15000 mm	**€ 399.95**
840404	WW 2700 K	14.2 mm	12 mm	109 lm/W	1090 lm	50000 mm	**€ 1324.95**
840441	WW 2700 K	14.5 mm	14.5 mm	109 lm/W	1090 lm	50000 mm	**€ 129.95**
840397	WW 3000 K	14.2 mm	12 mm	112 lm/W	1120 lm	15000 mm	**€ 399.95**
840405	WW 3000 K	14.2 mm	12 mm	112 lm/W	1120 lm	50000 mm	**€ 1324.95**
840443	WW 3000 K	14.5 mm	14.5 mm	112 lm/W	1120 lm	50000 mm	**€ 129.95**
840398	NW 4000 K	14.2 mm	12 mm	118 lm/W	1180 lm	15000 mm	**€ 399.95**
840406	NW 4000 K	14.2 mm	12 mm	118 lm/W	1180 lm	50000 mm	**€ 1324.95**
840445	NW 4000 K	14.5 mm	14.5 mm	118 lm/W	1180 lm	50000 mm	**€ 129.95**

SMD 48V-4W LONG RUN IP20

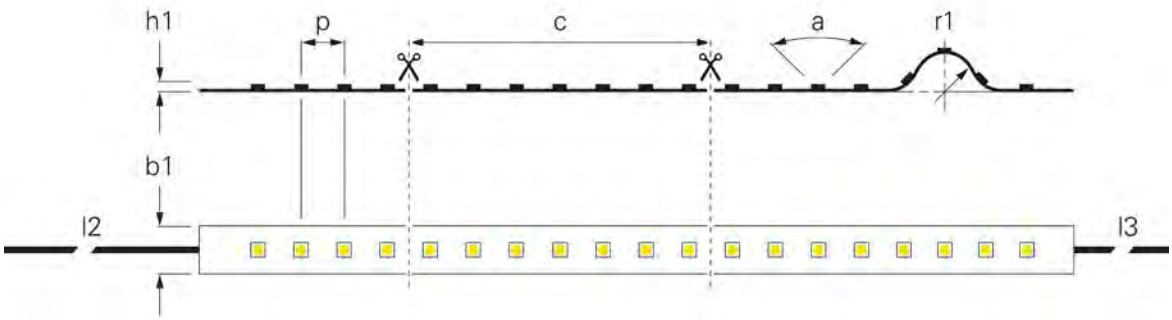

· high-performance adhesive tape 3M 200MP

(p) LED Distance	12.8 mm	(l2) Primary Cable Length	1 m
(c) Segment Length	166.66 mm	(l3) Secondary Cable Length	1 m
(a) Light Beam Angle	120 Degree	Rated Input 1m	4 W
(r1) Bending Radius min.	50 mm	Rated Input Voltage	48 V/DC
(h1) Height	1.3 mm	CRI (Ra)	80
(h2) Height End Cap	2.6 mm	Control	Dimmable via optional controller
(b1) Width	10 mm		
(b2) Width end cap	10.5 mm	Working Temperature	-15 to 50 °C
(l1) Length End Cap	15 mm	Channels	1

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	Price
840318	WW	3000 K	121 lm/W	485 lm	15000 mm	**€ 289.95**
840337	WW	3000 K	121 lm/W	485 lm	50000 mm	**€ 999.95**
840320	NW	4000 K	133 lm/W	530 lm	15000 mm	**€ 289.95**
840339	NW	4000 K	133 lm/W	530 lm	50000 mm	**€ 999.95**

SMD 48V-4W LONG RUN IP44

IP44

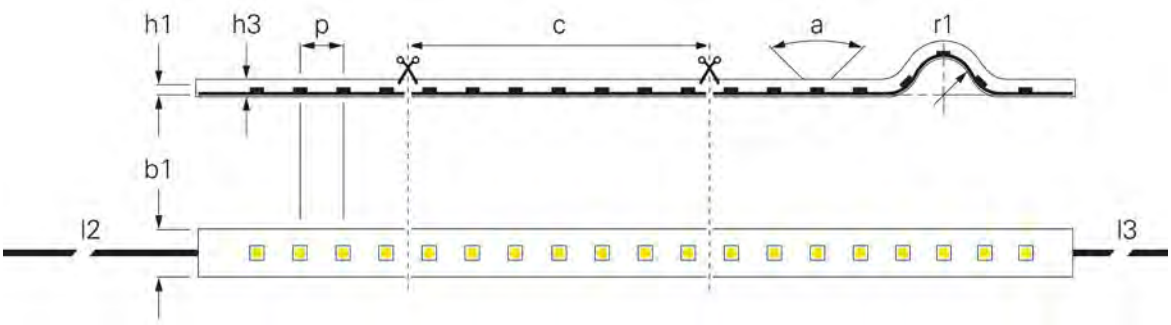

·high-performance adhesive tape 3M 200MP

(p) LED Distance	12.8 mm	(l3) Secondary Cable Length	1 m
(c) Segment Length	166.66 mm	Rated Input 1m	4 W
(a) Light Beam Angle	120 Degree	Rated Input Voltage	48 V/DC
(r1) Bending Radius min.	50 mm	CRI (Ra)	80
(h1) Height	2.6 mm	Control	Dimmable via optional controller
(h2) Height End Cap	2.6 mm		
(b1) Width	10 mm	Type of IP Protection	Silicone
(b2) Width end cap	10.5 mm	Channels	1
(l1) Length End Cap	15 mm		
(l2) Primary Cable Length	1 m		

Article		Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	Working Temperature	Price
840317	WW	3000 K	100 lm/W	400 lm	15000 mm	-15 to 50 °C	**€ 349.95**
840338	WW	3000 K	100 lm/W	400 lm	50000 mm	-10 to 60 °C	**€ 1124.95**
840319	NW	4000 K	114 lm/W	455 lm	15000 mm	-15 to 50 °C	**€ 349.95**
840340	NW	4000 K	114 lm/W	455 lm	50000 mm	-10 to 60 °C	**€ 1124.95**



230V LED STRIPES

This LED stripe is ideally suited if the requirements and focus are on flexible, water-protected and long-lasting lighting routes in indoor and outdoor areas.
Due to the voltage of 230V, no additional power supply unit is required. The delivery is ready for connection with mounted Schuko plug and moulded endcap.
Applications of large distances, such as on buildings or hotel corridors can be operated in one piece up to 50m.

SMD 230V-14W LONG RUN IP65

IP65

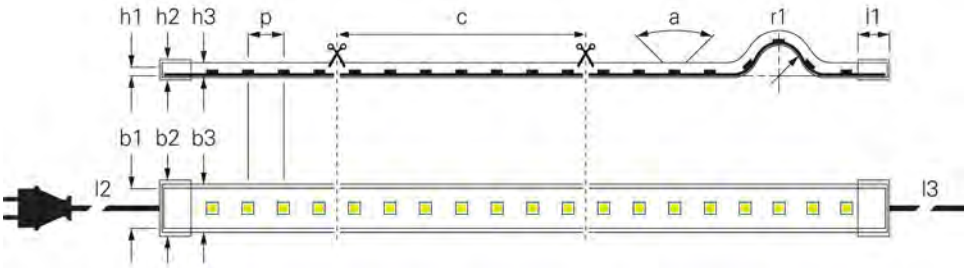

- **230 V direct connection**
- **Ready to connect using IP44 shaped plug and end cap**
- **Total length to be operated up to 50 m**
- **Including mounting material**

(p) LED Distance	11.9 mm	(l1) Length End Cap	27 mm
(c) Segment Length	166.7 mm	(l2) Primary Cable Length	3 m
(a) Light Beam Angle	120 Degree	(l3) Secondary Cable Length	3 m
(r1) Bending Radius min.	150 mm	Rated Input 1m	14 W
(h1) Height	13.2 mm	Rated Input Voltage	220-240 V/AC
(h2) Height End Cap	18 mm	CRI (Ra)	80
(h3) Height Hose	13.2 mm	Type of IP Protection	PVC cover
(b1) Width	17 mm	IP Protection Type Plug	IP 44
(b2) Width end cap	21.8 mm	Working Temperature	-10 to 60 °C
(b3) Width Hose	17 mm	Channels	1

Article	Colour Temperature	Luminous Efficiency 1m	Luminous Flux 1m	Length	EEI	Price
840390	WW 2700 K	103 lm/W	1442 lm	15000 mm	F	**€ 769.95**
840391	WW 2700 K	103 lm/W	1442 lm	50000 mm	F	**€ 2499.95**
840386	WW 3000 K	105 lm/W	1470 lm	15000 mm	E	**€ 769.95**
840387	WW 3000 K	105 lm/W	1470 lm	50000 mm	E	**€ 2499.95**
840388	NW 4000 K	114 lm/W	1596 lm	15000 mm	E	**€ 769.95**
840389	NW 4000 K	114 lm/W	1596 lm	50000 mm	E	**€ 2499.95**

1 CH | IP65

Accessories

930689	End cap set of 2 pieces for 230 V LED stripe	**€ 4.95**
930690	Supply cable with shaped plug for 230 V LED stripe	**€ 34.95**
930691	Flex connector for 230 V LED stripe	**€ 24.95**
930692	Mounting clamp set of 10 pieces for 230 V LED stripe	**€ 9.95**
930693	Plastic profile 1 m for 230 V LED stripe	**€ 14.95**
930809	Plastic profile 2 m for 230 V LED stripe	**€ 24.95**

ASSEMBLY KIT FOR IP65/IP67 LED STRIPS

Set comprises:

- **15 silicone retaining clips**
- **30 stainless steel screws**
- **Five end caps**
- **Supplied without silicone/adhesive**

Housing Silicone

Article	for Stripes with outer dimensions	Price
840293	**11-12 mm**	**€ 4.95**
840294	**13-15 mm**	**€ 4.95**
840295	**17-19 mm**	**€ 4.95**
840392	**8-10 mm**	**€ 4.95**



3M™ DOUBLE-SIDED ADHESIVE TAPE

- **For installing aluminium profiles/LED strips on smooth surfaces**
- **Not suitable for IP65/67 silicone strips**

Length 50 m Height 0.2 mm

Article	Width	Price
930345	8 mm	**€ 27.95**
930346	10 mm	**€ 29.95**
930347	12 mm	**€ 31.95**
930348	15 mm	**€ 38.95**
930349	20 mm	**€ 48.95**
930350	25 mm	**€ 56.95**

3M™ DOUBLE-SIDED ADHESIVE TAPE FOR SILICONE SURFACES

- **Special adhesive tape for LED strips with silicone tube/full potting**
- **High solvent resistance**
- **Excellent temperature resistance**
- **Strong initial bond**
- **High adhesive strength on most silicone surfaces and on substrates that are difficult to bond**

Length 55 m Height 0.127 mm

Article	Width	Price
930405	10 mm	**€ 209.95**
930406	12 mm	**€ 249.95**

DALI&0/1-10V Constant Voltage Dimming Driver
LCPTSAD-1H24V
SELV

POWER SUPPLIES

862 DC - CV

878 DC - CC

892 AC - CV

power supplies

page 868

page 868

page 869

page 869

page 870

page 870

page 871

page 871

page 872

page 872

page 873

page 874

page 875

page 875

page 876

page 881

page 881

page 882

page 882

page 883

page 884

page 884

page 885

page 885

page 886

page 886

page 889

page 890

page 890

page 892

page 892

page 893

PLANNING ELECTRICAL INSTALLATIONS EVEN BETTER

You will certainly notice the new technical data when browsing through our power supplies and ask yourself what it is all about? In future, we would like to support you even better in the planning and dimensioning of your installations. The background to this is that more and more power supplies for lighting are already being installed in standard buildings [directly in the luminaires or as an external power supply].

Due to the inrush currents inherent in the design, e.g. after a power failure and the subsequent simultaneous start of all power supplies, an overload of the circuit breakers may occur. In order to be able to take this into account during the planning stage, we provide you with the necessary data for all our power supplies.

WIRE CROSS SECTION

When installing voltage-stable [CV] or current-stable [CC] power supply units and associated components, always ensure that the cable cross-sections are sufficiently dimensioned, especially with regard to the dependence of the cable length.

The specified cable cross-sections [mm²] were adapted to the commercially available cross-sections. The maximum cable length of 10 m should not be exceeded. »Red values« must be avoided urgently.

12 V	2 m	5 m	10 m	12 m
25 W	0,25	0,75	1,50	[2,50]
50 W	0,75	1,50	4,00	[4,00]
75 W	1,00	2,50	4,00	[6,00]
100 W	1,50	4,00	6,00	[10,00]
125 W	1,50	4,00	10,00	[10,00]
150 W	2,50	6,00	10,00	-
200 W	2,50	6,00	-	-
300 W	4,00	10,00	-	-
400 W	6,00	-	-	-

24 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,50	[0,50]
50 W	0,25	0,50	0,75	[1,00]
75 W	0,25	0,75	1,00	[1,50]
100 W	0,50	0,75	1,50	[2,50]
125 W	0,50	1,00	2,50	[2,50]
150 W	0,50	1,50	2,50	[4,00]
200 W	0,75	1,50	4,00	[4,00]
300 W	1,00	2,50	6,00	-
400 W	1,50	4,00	6,00	-

48 V	2 m	5 m	10 m	12 m
25 W	0,25	0,25	0,25	[0,25]
50 W	0,25	0,25	0,25	[0,25]
75 W	0,25	0,25	0,50	[0,50]
100 W	0,25	0,25	0,50	[0,50]
125 W	0,25	0,25	0,50	[0,75]
150 W	0,25	0,50	0,75	[0,75]
200 W	0,25	0,50	1,00	[1,00]
300 W	0,25	0,75	1,50	[1,50]
400 W	0,50	1,00	2,50	[2,50]

HOW MANY POWER SUPPLY UNITS PER CIRCUIT BREAKER?

The maximum number of power supply units that may be connected to the respective circuit breaker is directly dependent on the inrush current. In our quick finders you will find the number for the most common types of circuit breaker [B10A, B16A, C10A, C16A].

CAPACITIVE LOAD OF POWER SUPPLIES

Due to their design, power supplies sometimes represent very different capacitive loads. Especially in combination with motion detectors, twilight switches or switching/dimming actuators, this value [as with the capacitor in nF/pF], which is available for many power supplies and specified in our quick finders, plays an important role with regard to the suitability and durability of all components. Please also refer to the manufacturer's data sheets.

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	20 W						x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	862232	869
12V	2,5-25 W	x					x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	862240	873
12V	40 W						x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	862162	870

DO YOU KNOW OUR LONG-FLAT POWER SUPPLIES?

The popular Long-Flat power supply series for installation in ceiling coves, shadow gaps or all other installation situations with limited space is now available in on/off and trailing edge dimmable versions in 12V, 24V and 48V in a wide range of versions from 45-240W.

All Long-Flat power supplies can be found on page 869.

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	4 W						x	x	mini		B10A=17, B16A=28, C10A=37, C16A=59	872127	868
12V	6 W						x		flat	38.83nF	B10A=17, B16A=28, C10A=37, C16A=59	872629	869
12V	12 W						x	x	octo	101uF	B10A=17, B16A=27, C10A=36, C16A=58	862229	868
12V	12 W						x		flat		B10A=17, B16A=27, C10A=36, C16A=58	862231	869
12V	20 W						x		flat	938uF	B10A=17, B16A=27, C10A=36, C16A=58	862232	869
12V	2,5-25 W	x					x		basic	31.16nF	B10=35, B16=56, C10=35, C16=56	862240	873
12V	40 W						x		basic	251.7nF	B10A=11, B16A=18, C10A=24, C16A=39	862162	870
12V	40 W						x	x	IP	621.5nF	B10A=5, B16A=9, C10A=12, C16A=19	872082	870
12V	40 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872097	871
12V	40 W		x	x	x		x		basic		B10A=18, B16A=28, C10A=36, C16A=56	862253	875
12V	45 W						x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	862123	869
12V	50 W						x		flat	485.5nF	B10A=11, B16A=18, C10A=24, C16A=39	862121	869
12V	12-50 W	x					x		basic	1924uF	B10A=17, B16A=28, C10A=17, C16A=28	862220	873
12V	60 W						x		long-flat	462.1nF	B10A=5, B16A=9, C10A=12, C16A=19	862093	869
12V	60 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872098	871
12V	60 W					x	x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872109	876
12V	75 W						x		basic	870nF	B10A=11, B16A=18, C10A=24, C16A=39	862127	870
12V	75 W						x	x	IP	621.5nF	B10A=5, B16A=8, C10A=10, C16A=16	872084	870
12V	75 W		x	x	x		x		basic		B10A=10, B16A=16, C10A=20, C16A=32	862254	875
12V	90 W						x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872099	871
12V	100 W						x		basic	842.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862165	870
12V	100 W						x	x	IP	621.5nF	B10A=3, B16A=5, C10A=7, C16A=11	872093	870
12V	100 W						x		long-flat	462.1nF	B10A=3, B16A=5, C10A=7, C16A=11	862125	869
12V	33-100 W	x					x	x	IP	93,14nF	B10=7, B16=15, C10=7, C16=15	872135	874
12V	34-100 W	x					x		basic	146,34nF	B10=7, B16=15, C10=7, C16=15	862241	873
12V	120 W						x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872100	871

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
12V	120 W					x	x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872110	876
12V	150 W						x		long-flat	462.1nF	B10A=3, B16A=5, C10A=6, C16A=10	862172	869
12V	150 W						x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	862167	869
12V	150 W						x	x	IP	621.5nF	B10A=2, B16A=4, C10A=6, C16A=9	872086	870
12V	66-200 W	x					x	x	IP	148,64nF	B10=3, B16=7, C10=3, C16=7	872137	874
12V	200 W						x	x	IP	621.5nF	B10A=2, B16A=3, C10A=4, C16A=7	872088	870
12V	200 W					x	x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872111	876
24V	4 W						x	x	mini		B10A=59, B16A=94, C10A=123, C16A=197	872128	868
24V	6 W						x		flat	43.5nF	B10A=17, B16A=28, C10A=37, C16A=59	872630	869
24V	12 W						x	x	octo	620uF	B10A=17, B16A=27, C10A=36, C16A=58	862230	868
24V	12 W						x		flat	311uF	B10A=17, B16A=27, C10A=36, C16A=58	862233	869
24V	20 W						x		flat	446uF	B10A=17, B16A=27, C10A=36, C16A=58	862234	869
24V	2,5-25 W	x					x		basic	9520uF	B10=35, B16=56, C10=35, C16=56	862221	873
24V	30W	x					x		long-flat		B16A=25, C16A=40	862277	873
24V	12-30W			x	x		x		long-flat		B10A=27, B16A=44, C10A=44, C16A=70	872146	876
24V	40 W						x		basic	762nF	B10A=11, B16A=18, C10A=24, C16A=39	862163	870
24V	40 W						x	x	IP	626.3nF	B10A=5, B16A=9, C10A=12, C16A=19	872083	870
24V	40 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872101	871
24V	40 W		x	x	x		x		basic		B10A=18, B16A=28, C10A=36, C16A=56	862255	875
24V	45 W						x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	862124	869
24V	12-50 W	x					x		basic	10520uF	B10A=17, B16A=28, C10A=17, C16A=28	862222	873
24V	50 W						x		flat	604.5nF	B10A=11, B16A=18, C10A=24, C16A=39	862122	869
24V	60 W						x		long-flat	451.2nF	B10A=5, B16A=9, C10A=12, C16A=19	862094	869
24V	60 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872102	871
24V	60 W					x	x		IP		B10A=6, B16A=9, C10A=10, C16A=16	872112	876
24V	12-60 W	x					x	x	*			872045	872

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
24V	60W	x					x		long-flat		B16A= 25, B16A=40	862278	873
24V	26-60W			x	x		x		long-flat		B10A=23, B16A=37, C10A=37, C16A=59	872147	876
24V	75 W						x		basic	760nF	B10A=11, B16A=18, C10A=24, C16A=39	862164	870
24V	75 W						x	x	IP	626.3nF	B10A=5, B16A=8, C10A=10, C16A=16	872085	870
24V	75 W		x	x	x		x		basic		B10A=10, B16A=16, C10A=20, C16A=32	862256	875
24V	25-75W	x					x		long-flat		B10A=2, B16A=4 C10A=5, C16A=9	862282	872
24V	90 W						x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872103	871
24V	100 W						x		basic	724.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862166	870
24V	33-100 W	x					x		IP	94,13nF	B10=7, B16=15, C10=7, C16=15	872136	874
24V	34-100 W	x					x		basic	140.74nF	B10=7, B16=15, C10=7, C16=15	862242	873
24V	100 W						x		long-flat	451.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862126	869
24V	100 W						x	x	IP	626.3nF	B10A=3, B16A=5, C10A=7, C16A=11	872094	870
24V	120 W						x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872104	871
24V	120 W					x	x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872113	876
24V	150 W						x		basic	591.2nF	B10A=2, B16A=4, C10A=6, C16A=9	862168	870
24V	150 W						x		long-flat	451.2nF	B10A=3, B16A=5, C10A=6, C16A=10	862173	869
24V	150 W						x	x	IP	626.3nF	B10A=2, B16A=4, C10A=6, C16A=9	872087	870
24V	30-150 W	x					x	x	*			872046	872
24V	50-150 W	x					x		long-flat		B10A=2, B16A=3, C10A=4, C16A=7	862268	872
24V	150 W		x	x	x		x		basic		B10A=5, B16A=9, C10A=10 C16A=18	862262	875
24V	45-150W			x	x		x		long-flat		B10A=11, B16A=17 C10A=17, C16A=27	872148	876
24V	200 W					x	x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872114	876
24V	66-200 W	x					x	x	IP	148.64nF	B10=3, B16=7, C10=3, C16=7	872138	874
24V	240 W						x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=7	872089	870
24V	240 W						x		long-flat	5600uF	B10A=1, B16A=2, C10A=3, C16A=5	862265	869
24V	80-240W	x					x		long-flat		B10A=2, B16A=3 C10A=4, C16A=6	862280	872

electr. data		dimmable via					usage / design			electrical limit values		power supply	
voltage	power	leading cut-off	1 - 10V	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
24V	240 W		x	x	x		x		basic		B10A=3, B16A=5, C10A=6, C16A=10	862263	875
24V	320 W						x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=6	872091	870
48V	40 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872105	871
48V	60 W						x	x	IP		B10A=6, B16A=9, C10A=10, C16A=16	872106	871
48V	25-75W	x					x		long-flat		B10A=2, B16A=4 C10A=5, C16A=9	862283	872
48V	75 W		x	x	x		x		basic		B10A=10, B16A=16, C10A=20, C16A=32	862273	875
48V	90 W						x	x	IP		B10A=2, B16A=3, C10A=3, C16A=6	872107	871
48V	33-100 W	x					x		IP	6,6uF	B10=3 B16=5, C10=7, C16=11	872142	874
48V	34-100 W	x					x		basic	140,74nF	B10=7 B16=15, C10=7, C16=15	862274	873
48V	100 W						x		long-flat	451.2nF	B10A=3, B16A=5, C10A=7, C16A=11	862270	869
48V	120 W						x	x	IP		B10A=2, B16A=4, C10A=4, C16A=6	872108	871
48V	150 W		x	x	x		x		basic		B10A=5, B16A=9, C10A=10 C16A=18	862275	875
48V	50-150 W	x					x		long-flat		B10A=2, B16A=3, C10A=4, C16A=7	862269	872
48V	150 W						x		long-flat	451.2nF	B10A=3, B16A=5, C10A=6, C16A=10	862271	869
48V	80-240W	x					x		long-flat		B10A=2, B16A=3 C10A=4, C16A=6	862281	872
48V	320 W						x	x	IP	626.3nF	B10A=2, B16A=3, C10A=4, C16A=6	872145	870
48V	66-200 W	x					x	x	IP	6,6uF	B10=2, B16=3, C10=4 C16=7	872143	874
48V	200 W					x	x		IP		B10A=2, B16A=4, C10A=4, C16A=6	872115	876
48V	240 W		x	x	x		x		basic		B10A=3, B16A=5, C10A=6, C16A=10	862276	875
48V	240 W						x		long-flat	5600uF	B10A=1, B16A=2, C10A=3, C16A=5	862272	869
48V	600 W						x	x	IP		B10A=1, B16A=1, C10A=1, C16A=2	872125	871
48V	600 W		x				x	x	IP		B10A=1, B16A=1, C10A=1, C16A=2	872126	875

power supplies design

mini round / octo flat basic long-flat IP * special design

IP65

DEKO-LIGHT POWER SUPPLY UNITS CV | MINI DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**

Housing	Plastic	Height	21 mm
Power	4 W	Rated Input Voltage	220-240 V/AC
Length	53 mm	Mounting Location	Inside, Outside
Width	27 mm		

Article	Output Voltage	Output Current	Price
872127 ■	12 V/DC	0-330 mA	**€ 12.95**
872128 ■	24 V/DC	0-170 mA	**€ 12.95**

CV | 110 | SELV | 1 CH | IP65

IP65

DEKO-LIGHT POWER SUPPLY UNITS CV IP | OCTO DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**

Housing	Plastic	Height	24 mm
Power	12 W	Rated Input Voltage	220-240 V/AC
Length	50 mm	Mounting Location	Inside, Outside
Width	48 mm		

Article	Output Voltage	Output Current	Price
862229 ■	12 V/DC	0-1000 mA	**€ 21.95**
862230 ■	24 V/DC	0-500 mA	**€ 21.95**

CV | 110 | SELV | 1 CH | IP65

DEKO-LIGHT POWER SUPPLY UNITS CV | FLAT DESIGN

- **Ideal for concealed mounting in ceiling coves**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
872629	■	12 V/DC	6.0 W	0-500 mA	98 mm	46 mm	11 mm	**€ 16.95**
862231	■	12 V/DC	12.0 W	0-1000 mA	128 mm	50 mm	13 mm	**€ 21.95**
862232	■	12 V/DC	20.0 W	0-1670 mA	128 mm	50 mm	13 mm	**€ 25.95**
862121	■	12 V/DC	50.0 W	0-4160 mA	185 mm	62 mm	22 mm	**€ 52.95**
872630	■	24 V/DC	6.0 W	0-250 mA	98 mm	46 mm	11 mm	**€ 16.95**
862233	■	24 V/DC	12.0 W	0-500 mA	128 mm	50 mm	13 mm	**€ 21.95**
862234	■	24 V/DC	20.0 W	0-830 mA	128 mm	50 mm	13 mm	**€ 25.95**
862122	■	24 V/DC	50.0 W	0-2100 mA	185 mm	62 mm	22 mm	**€ 52.95**

DEKO-LIGHT POWER SUPPLY UNITS CV | LONG-FLAT DESIGN

- **Ideal for concealed mounting in ceiling coves**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
862123	■	12 V/DC	45.0 W	0-3750 mA	251 mm	30 mm	16 mm	**€ 49.95**
862093	□	12 V/DC	60.0 W	0-5000 mA	305 mm	30 mm	17 mm	**€ 59.95**
862125	■	12 V/DC	100.0 W	0-8340 mA	312 mm	30 mm	18.2 mm	**€ 96.95**
862172	■	12 V/DC	132.0 W	0-11000 mA	335 mm	30 mm	21.6 mm	**€ 129.95**
862124	■	24 V/DC	45.0 W	0-1870 mA	251 mm	30 mm	16 mm	**€ 49.95**
862094	□	24 V/DC	60.0 W	0-2500 mA	305 mm	30 mm	18.2 mm	**€ 59.95**
862126	■	24 V/DC	100.0 W	0-4170 mA	312 mm	30 mm	18.2 mm	**€ 96.95**
862173	■	24 V/DC	150.0 W	0-6250 mA	335 mm	30 mm	21.6 mm	**€ 129.95**
862265	■	24 V/DC	240.0 W	0-10000 mA	357 mm	32 mm	23 mm	**€ 159.95**
862270	■	48 V/DC	100.0 W	0-2080 mA	312 mm	30 mm	18.2 mm	**€ 96.95**
862271	■	48 V/DC	150.0 W	0-3125 mA	335 mm	30 mm	21.6 mm	**€ 129.95**
862272	■	48 V/DC	240.0 W	0-5000 mA	357 mm	32 mm	22.5 mm	**€ 159.95**

DEKO-LIGHT POWER SUPPLY UNITS CV | BASIC DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
862162	■	12 V/DC	40.0 W	0-3300 mA	166 mm	52 mm	24 mm	**€ 46.95**
862127	■	12 V/DC	75.0 W	0-6300 mA	184 mm	61 mm	32 mm	**€ 74.95**
862165	■	12 V/DC	100.0 W	0-8300 mA	184 mm	61 mm	32 mm	**€ 96.95**
862167	■	12 V/DC	150.0 W	0-12500 mA	210 mm	67 mm	34 mm	**€ 129.95**
862163	■	24 V/DC	40.0 W	0-1700 mA	166 mm	52 mm	24 mm	**€ 46.95**
862164	■	24 V/DC	75.0 W	0-3100 mA	184 mm	61 mm	32 mm	**€ 74.95**
862166	■	24 V/DC	100.0 W	0-4200 mA	184 mm	61 mm	32 mm	**€ 96.95**
862168	■	24 V/DC	150.0 W	0-6250 mA	210 mm	67 mm	34 mm	**€ 129.95**

DEKO-LIGHT POWER SUPPLY UNITS CV IP | IP DESIGN

- **Robust housing**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Mounting Location	Inside, Outside
Rated Input Voltage	100-240 V/AC		

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
872082	■	12 V/DC	40.0 W	0-3340 mA	176 mm	58 mm	30.5 mm	**€ 74.95**
872084	■	12 V/DC	75.0 W	0-6250 mA	186 mm	64 mm	39 mm	**€ 94.95**
872093	■	12 V/DC	100.0 W	0-8340 mA	186 mm	64 mm	39 mm	**€ 114.95**
872086	■	12 V/DC	150.0 W	0-12500 mA	191 mm	70 mm	40 mm	**€ 149.95**
872088	■	12 V/DC	200.0 W	0-16670 mA	249 mm	72 mm	41 mm	**€ 179.95**
872083	■	24 V/DC	40.0 W	0-1670 mA	176 mm	58 mm	30.5 mm	**€ 74.95**
872085	■	24 V/DC	75.0 W	0-3125 mA	186 mm	64 mm	39 mm	**€ 94.95**
872094	■	24 V/DC	100.0 W	0-4170 mA	186 mm	64 mm	39 mm	**€ 114.95**
872087	■	24 V/DC	150.0 W	0-6250 mA	191 mm	70 mm	40 mm	**€ 149.95**
872089	■	24 V/DC	240.0 W	0-10000 mA	249 mm	72 mm	40 mm	**€ 184.95**
872091	■	24 V/DC	320.0 W	0-13340 mA	252 mm	90 mm	44 mm	**€ 219.95**
872145	■	48 V/DC	320.0 W	0-6660 mA	252 mm	90 mm	44 mm	**€ 219.95**

MEANWELL POWER SUPPLY UNITS CV IP | NPF SERIES

IP67

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**
- **Robust housing**

Housing	Plastic	Mounting Location	Inside, Outside
Rated Input Voltage	90-305 V/AC		

Article		Output Voltage	Power	Output Current	Length	Width	Height	Price
872097	■	12 V/DC	40.0 W	0-3340 mA	150 mm	53 mm	35 mm	**€ 84.95**
872098	■	12 V/DC	60.0 W	0-5000 mA	150 mm	53 mm	35 mm	**€ 94.95**
872099	■	12 V/DC	90.0 W	0-7500 mA	171 mm	63 mm	37.5 mm	**€ 119.95**
872100	■	12 V/DC	120.0 W	0-10000 mA	191 mm	63 mm	37.5 mm	**€ 139.95**
872101	■	24 V/DC	40.0 W	0-1670 mA	150 mm	53 mm	35 mm	**€ 84.95**
872102	■	24 V/DC	60.0 W	0-2500 mA	150 mm	53 mm	35 mm	**€ 94.95**
872103	■	24 V/DC	90.0 W	0-3750 mA	171 mm	63 mm	37.5 mm	**€ 119.95**
872104	■	24 V/DC	120.0 W	0-5000 mA	191 mm	63 mm	37.5 mm	**€ 139.95**
872105	■	48 V/DC	40.0 W	0-840 mA	150 mm	53 mm	35 mm	**€ 84.95**
872106	■	48 V/DC	60.0 W	0-1250 mA	150 mm	53 mm	35 mm	**€ 94.95**
872107	■	48 V/DC	90.0 W	0-1880 mA	171 mm	63 mm	37.5 mm	**€ 119.95**
872108	■	48 V/DC	120.0 W	0-2500 mA	191 mm	63 mm	37.5 mm	**€ 139.95**

IP67

MEANWELL POWER SUPPLY UNITS CV IP | ELG/HLG SERIES

- **Output voltage/current can be adjusted via potentiometer**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Width	144 mm
Output Voltage	48 V/DC	Height	48.5 mm
Power	600 W	Rated Input Voltage	90-305 V/AC
Output Current	0-12500 mA	Mounting Location	Inside, Outside
Length	280 mm		

Article		Price
872125	□	**€ 489.95**

IP67

ABN LED SAFETY TRANSFORMER CV DIM IP

- **Safety transformer [DC] in accordance with DIN 2006-7 EN 61558-2-6: 2010-04**
- **Reinforced double insulation [separate primary and secondary winding]**
- **Additional insulating plastic parts**
- **More stringent test conditions**
- **Suitable for applications in areas of increased personal protection in accordance with DIN EN 61558 for operating lights in swimming pools, fountains, wet rooms or similar.**
- **Primary dimming possible using leading-edge phase dimmers**
- **Maximum load: 80 % output in continuous operation**

Housing	Plastic	Channels	1
Output Voltage	24 V/DC	Mounting Location	Inside, Outside
Rated Input Voltage	220-240 V/AC		

Article		Power	Length	Width	Height	Price
872045	■	12.0-60.0 W	150 mm	90 mm	70 mm	**€ 369.95**
872046	■	30.0-150.0 W	176 mm	116 mm	110 mm	**€ 619.95**

CV | 110 | 1 CH | IP67

NEW

DEKO-LIGHT NETZGERÄTE CV DIM / BAUFORM LONG-FLAT

- **dimmable with leading/trailing edge phase dimmers**
- **- ideal for retrofitting existing installations, as primarily dimmable with**
- **- rotary/push-button dimmers [C-compatible]**
- **- long, compact design**
- **- not combinable with PWM dimmers such as RF, DMX, DALI, KNX**
- **- flicker-free**
- **- short-circuit and overload-proof**
- **- overheating protection**

Housing	Plastic	Channels	1
Width	32 mm	Mounting Location	Inside

Article		Output Voltage	Power	Length	Height	Rated Input Voltage	Price
862282	■	24 V/DC	25.0-75.0 W	400 mm	21.6 mm	198-264 V/AC	**€ 99.95**
862268	■	24 V/DC	50.0-150.0 W	400 mm	21.6 mm	220-240 V/AC	**€ 129.95**
862280	■	24 V/DC	80.0-240.0 W	443 mm	23 mm	220-240 V/AC	**€ 159.95**
862283	■	48 V/DC	25.0-75.0 W	400 mm	21.6 mm	198-264 V/AC	**€ 99.95**
862269	■	48 V/DC	50.0-150.0 W	400 mm	21.6 mm	220-240 V/AC	**€ 129.95**
862281	■	48 V/DC	80.0-240.0 W	443 mm	23 mm	220-240 V/AC	**€ 159.95**

CV | SELV | 1 CH | IP20

NEW

KPG POWER SUPPLY UNITS CV DIM / LONG-FLAT DESIGN

- **Can be dimmed using trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]**
- **Long, extremely compact design**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Polycarbonate	Rated Input Voltage	220-240 V/AC
Output Voltage	24 V/DC	Channels	1
Width	30 mm	Mounting Location	Inside
Height	18.5 mm		

Article		Power	Length	Price
862277	☐	0.0-30.0 W	260 mm	**€ 114.95**
862278	☐	0.0-60.0 W	300 mm	**€ 179.95**

CV | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV DIM | BASIC DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers (C-compatible)**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	220-240 V/AC	Mounting Location	Inside

Article		Output Voltage	Power	Length	Width	Height	Price
862240	■	12 V/DC	9.6-25.0 W	128 mm	52 mm	30 mm	**€ 54.95**
862220	■	12 V/DC	12.0-50.0 W	184 mm	61 mm	32 mm	**€ 74.95**
862241	■	12 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 144.95**
862221	■	24 V/DC	9.6-25.0 W	128 mm	52 mm	30 mm	**€ 54.95**
862222	■	24 V/DC	12.0-50.0 W	184 mm	61 mm	32 mm	**€ 74.95**
862242	■	24 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 144.95**
862274	■	48 V/DC	34.0-100.0 W	210 mm	67 mm	34 mm	**€ 144.95**

CV | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CV DIM IP | IP DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Ideal for retrofitting existing installations, since it can be dimmed primarily with rotary/push-button dimmers [C-compatible]**
- **Cannot be combined with PWM dimmers such as RF, DMX, DALI or KNX**
- **Robust housing**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Channels	1
Height	40 mm	Mounting Location	Inside, Outside
Rated Input Voltage	220-240 V/AC		

Article		Output Voltage	Power	Length	Width	Price
872135	■	12 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 169.95**
872137	□	12 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 206.95**
872136	■	24 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 169.95**
872138	□	24 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 206.95**
872142	□	48 V/DC	33.0-100.0 W	191 mm	70 mm	**€ 169.95**
872143	□	48 V/DC	66.0-200.0 W	249 mm	72 mm	**€ 206.95**

DALI

DEKO-LIGHT POWER SUPPLY UNITS CV DIM | LCP DALI

- **Can be dimmed using DALI2/DALI1**
- **Can be dimmed using 0-10 V/1-10 V**
- **Can be dimmed using touch dimmer via 230 V push-button (iPush)**
- **New Intelli-Push function [shortcut synchronises all connected power supply units when needed]**
- **Power supply unit and PWM dimmer in one device**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	220-240 V/AC	Mounting Location	Inside

Article		Output Voltage	Power	Length	Width	Height	Price
862253	☐	12 V/DC	40.0 W	185 mm	42.5 mm	28.5 mm	**€ 99.95**
862254	☐	12 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 129.95**
862255	☐	24 V/DC	40.0 W	185 mm	42.5 mm	28.5 mm	**€ 99.95**
862256	☐	24 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 129.95**
862262	☐	24 V/DC	150.0 W	295 mm	40 mm	32 mm	**€ 169.95**
862263	☐	24 V/DC	240.0 W	360 mm	40 mm	32 mm	**€ 219.95**
862273	☐	48 V/DC	75.0 W	295 mm	40 mm	32 mm	**€ 129.95**
862275	☐	48 V/DC	150.0 W	295 mm	40 mm	32 mm	**€ 169.95**
862276	☐	48 V/DC	240.0 W	360 mm	40 mm	32 mm	**€ 219.95**

IP67

MEANWELL POWER SUPPLY UNITS CV DIM IP | ELG/HLG SERIES

- **Can be dimmed using 0-10 V/1-10 V**
- **Flicker-free, secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Height	48.5 mm
Output Voltage	48 V/DC	Rated Input Voltage	90-305 V/AC
Power	600 W	Channels	1
Length	280 mm	Mounting Location	Inside, Outside
Width	144 mm		

Article		Price
872126	☐	**€ 499.95**

KPG POWER SUPPLY UNITS CV DALI / LONG-FLAT DESIGN

- **Can be dimmed using DALI1/DALI2**
- **Power supply unit and DALI PWM dimmer in one device**
- **Extremely compact design**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Aluminium	Rated Input Voltage	100-305 V/AC
Output Voltage	24 V/DC	Channels	1
Width	30 mm	Mounting Location	Inside, Outside

Article		Power	Length	Height	Price
872146	☐	12.0-30.0 W	300 mm	16 mm	**€ 64.95**
872147	☐	26.0-60.0 W	350 mm	18 mm	**€ 79.95**
872148	☐	45.0-150.0 W	350 mm	18 mm	**€ 129.95**

CV | 110 | SELV | 1 CH | IP67

MEANWELL POWER SUPPLY UNITS CV DIM | PWM KNX

- **Can be dimmed using KNX bus**
- **Flicker-free, secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Channels	1
Rated Input Voltage	90-305 V/AC	Mounting Location	Inside

Article		Output Voltage	Power	Length	Width	Height	Price
872109	■	12 V/DC	60.0 W	150 mm	53 mm	35 mm	**€ 159.95**
872110	■	12 V/DC	120.0 W	191 mm	63 mm	37.5 mm	**€ 209.95**
872111	■	12 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 244.95**
872112	■	24 V/DC	60.0 W	150 mm	53 mm	35 mm	**€ 159.95**
872113	■	24 V/DC	120.0 W	191 mm	63 mm	37.5 mm	**€ 209.95**
872114	■	24 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 244.95**
872115	■	48 V/DC	200.0 W	195 mm	68 mm	39.5 mm	**€ 244.95**

CV | 110 | SELV | 1 CH | IP20

electr. data			dimmable via				usage / design			electrical limit values		power supply	
current strength	power	voltage	leading cut-off	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
260 mA	6,0-12,0W	23-46V	x				x		basic		B10A= 17, B16A=28 C10A=37, C16A=59	862285	885
350 mA	0,9-3,9 W	2,5-11V					x	x	mini		B10A=70, B16A=112, C10A=140, C16A=224	872129	881
350 mA	2,1-4,0 W	6-12V	x				x	x	mini	10.00nF	B10A=35, B16A=56, C10A=74, C16A=118	872132	884
350 mA	0,7-6,0 W	2-18V					x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	872628	882
350 mA	3,2-8,0 W	9-23V					x		round	200uF	B10A=17, B16A=28, C10A=37, C16A=59	862212	881
350 mA	3,9-9,0 W	11-26V	x				x		basic		B10A=17, B16A=28, C10A=37, C16A=59	862202	885
350 mA	6,0-10,0 W	17-29V					x		mini		B10A=57, B16A=92, C10A=57, C16A=92	862239	882
350 mA	6,3-12,0 W	18-35V	x				x		basic	20,65pF	B10A=17, B16A=28, C10A=37, C16A=59	862203	885
350 mA	0,7-12,0 W	2-35V					x		flat	194,0uF	B10A=11, B16A=18, C10A=24, C16A=39	862223	882
350 mA	6,3-12,0 W	18-37V	x				x	x	octo	190uF	B10A=35, B16A=56, C10A=74, C16A=118	862235	884
350 mA	9,1-15,0 W	26-43V	x				x		basic		B10A=38, B16A=61, C10A=38, C16A=61	862266	886
350 mA	0,7- 18,0 W	2-52V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180512	883
350 mA	9,8- 20,0 W	28-57V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862204	885
350 mA	0,7- 20,0 W	2-57V					x		flat	195uF	B10A=11, B16A=18, C10A=24, C16A=39	862224	882
450 mA	9,9-19,0 W	22-42V	x				x		quick		B10A=11, B16A=18, C10A=24, C16A=39	862257	885
500 mA	2,0-4,0 W	4-8V					x	x	mini	85,0pF	B10A=70, B16A=112, C10A=140, C16A=224	872130	881
500 mA	2,0-4,0 W	4-8V	x				x	x	mini	4.75nF	B10A=35, B16A=56, C10A=74, C16A=118	872014	884
500 mA	1,0-6,0 W	2-12V					x		flat	38.48nF	B10A=17, B16A=28, C10A=37, C16A=59	862130	882
500 mA	3,0-8,0 W	6-16V					x		round	62.96nF	B10A=11, B16A=18, C10A=24, C16A=39	862128	881
500 mA	1,0- 12,0 W	2-24V					x		flat	298uF	B10A=11, B16A=18, C10A=24, C16A=39	862225	882
500 mA	6,5-10,0 W	13-20V					x		mini		B10A=57, B16A=92, C10A=57, C16A=92	862238	882
500 mA	6,0- 12,0 W	12-24V	x				x	x	octo	186uF	B10A=35, B16A=56, C10A=74, C16A=118	862236	884
500 mA	1,0- 18,0 W	2-38V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180513	883
500 mA	1,0- 20,0 W	2-40V					x		flat	292uF	B10A=11, B16A=18, C10A=24, C16A=39	862226	882
500 mA	10,0-20,0 W	20-40V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862205	885
500 mA	15,0-30,0 W	30-60V					x		basic	366nF	B10A=11, B16A=18, C10A=24, C16A=39	862196	883
500 mA	20,0-40,0 W	40-80V					x		basic	356nF	B10A=8, B16A=14, C10A=18, C16A=29	862197	883
500 mA	20,0-40,0 W	40-80V	x				x		basic	29.84nF	B10A=35, B16A=56, C10A=35, C16A=56	862136	885

electr. data			dimmable via				usage / design			electrical limit values		power supply	
current strength	power	voltage	leading cut-off	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
700 mA	1,7-4,0 W	2-6V					x	x	mini	82pF	B10A=70, B16A=112, C10A=140, C16A=224	872131	881
700 mA	2,0-4,0 W	2,5-6V	x				x	x	mini	10nF	B10A=35, B16A=56, C10A=74, C16A=118	872134	884
700 mA	1,4-6,0 W	2-9V					x		flat	40.44nF	B10A=17, B16A=28, C10A=37, C16A=59	862048	882
700 mA	4,2-8,0 W	6-12V					x		round	46.24nF	B10A=11, B16A=18, C10A=24, C16A=39	862129	881
700 mA	1,4- 12,0 W	2-17V					x		flat	427uF	B10A=11, B16A=18, C10A=24, C16A=39	862227	882
700 mA	7,0- 12,0 W	10-17V	x				x	x	octo	188uF	B10A=35, B16A=56, C10A=74, C16A=118	862237	884
700 mA	1,4- 18,0 W	2-26V					x		basic	147nF	B10A=17, B16A=28, C10A=37, C16A=59	180514	883
700 mA	1,4- 20,0 W	2-29V					x		flat	295uF	B10A=11, B16A=18, C10A=24, C16A=39	862228	882
700 mA	9,8- 20,0 W	14-28V	x				x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862207	885
700 mA	9,1-30,0 W	13-43V					x		basic		B10A=11, B16A=18, C10A=24, C16A=39	862198	883
700 mA	20,3-35,0 W	29-57V					x		basic	359,3nF	B10A=8, B16A=14, C10A=18, C16A=29	862199	883
700 mA	19,6-40,0 W	28-56V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862208	885
900mA	19,8-40,0 W	22-44V					x		basic	13.5pF	B10A=8, B16A=14, C10A=18, C16A=29	862157	883
900mA	19,8-40,0 W	22-44V	x				x		basic	30nF	B10A=35, B16A=56, C10A=35, C16A=56	862264	885
1050 mA	20,0-40,0 W	19-38V					x		basic		B10A=8, B16A=14, C10A=18, C16A=29	862201	883
1050 mA	20,0-40,0 W	19-38V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862209	885
1050 mA	23,5-45,0 W	22-43V	x				x		basic	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	862210	885
1050 mA	23,1-45,0 W	22-43V	x				x		quick	33,46nF	B10A=35, B16A=56, C10A=35, C16A=56	862258	885
1300 mA	26,0-50,0 W	20-39V	x				x		basic		B10A=35, B16A=56, C10A=35, C16A=56	862211	885
1500 mA	40,0-60,0 W	27-42V	x				x		quick		B10A=25, B16A=41, C10A=25, C16A=41	862259	885

power supplies design

mini round / octo flat basic long-flat IP * special design

electr. data			dimmable via				usage / design			electrical limit values		power supply	
current strength	power	voltage	leading cut-off	touch dimmer [push]	DALI	KNX	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
MULTI*	3,2- 20,0 W	9-40V	x				x		basic		B10A=46, B16A=74, C10A=93, C16A=149	862141	886
MULTI*	3,2- 12,0 W	15-54V		x	x		x		basic		B10A=23, B16A=37, C10A=46, C16A=74	862190	889
MULTI*	5,0- 25,0 W	20-60V		x	x		x		basic		B10A=23, B16A=37, C10A=46, C16A=74	862191	889
MULTI*	8,75- 45,0 W	21-70V		x	x		x		basic		B10A=12, B16A=20, C10A=25, C16A=40	862192	889
MULTI*	14,7- 45,0 W	14-43V		x	x		x		basic		B10A=12, B16A=20, C10A=25, C16A=40	862193	889
MULTI*	26,3- 75,5 W	25-71V		x	x		x		basic		B10A=3, B16A=5, C10A=6, C16A=10	862194	889
MULTI*	2,1- 25,2 W	6-54V		x	x		x		*		B10A=16, B16A=26, C10A=27, C16A=44	862246	890
MULTI*	0,70 - 42,00 W	2-100V		x	x		x		*		B10A=16, B16A=26, C10A=27, C16A=44	862247	890
MULTI*	1,0- 60,3 W	2-90V		x	x		x		*		B10A=15, B16A=25, C10A=20, C16A=32	862248	890

* Due to the large number of possible settings, please refer to the detailed technical data on the specified product page.

TIPS AND TRICKS FOR CURRENT-STABLE POWER SUPPLIES

In contrast to voltage-stable power supplies [CV], current-stable power supply units, often abbreviated to CC [constant current], the output current is stable. This important factors that must be taken into focus during planning and installation.

- Do not connect LEDs to CC power supply units below voltage, as this can damage them and cause them to fail after a short period of operation.
- if possible: 1 luminaire = 1 power supply
- if necessary: operate max. 2 luminaires in a series connection on one power supply unit.
  However, the voltage range and the power of the power supply must be checked carefully.

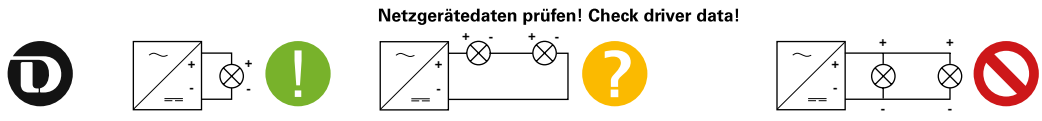

Installationshinweis für Netzgerät stromstabil [CC]: LED nicht unter Spannung anschließen!
installation instruction for power supply constant current [CC]: Don‘t connect LED under voltage!

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC | MINI DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	21 mm
Length	53 mm	Rated Input Voltage	220-240 V/AC
Width	27 mm	Mounting Location	Inside, Outside

Article		Output Current	Power	Output Voltage	Price
872129	■	350 mA	0.9-3.9 W	2.5-11 V/DC	**€ 12.95**
872130	■	500 mA	2.0-4.0 W	4-8 V/DC	**€ 12.95**
872131	■	700 mA	1.7-4.0 W	2.5-6 V/DC	**€ 12.95**

CC | 110 | M M | SELV | 1 CH | IP65 | □

DEKO-LIGHT POWER SUPPLY UNITS CC | ROUND DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Rated Input Voltage	100-240 V/AC
Height	22 mm	Mounting Location	Inside
Ø	53 mm		

Article		Output Current	Power	Output Voltage	Price
862212	■	350 mA	3.2-8.0 W	9-23 V/DC	**€ 20.95**
862128	■	500 mA	3.0-8.0 W	6-16 V/DC	**€ 20.95**
862129	■	700 mA	4.2-8.0 W	6-12 V/DC	**€ 20.95**

CC | 110 | M M | SELV | 1 CH | IP20 | □

HEP POWER SUPPLY UNITS CC | G5S10W

- **Compact design**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	20 mm
Length	58.1 mm	Rated Input Voltage	220-240 V/AC
Width	39.1 mm	Mounting Location	Inside

Article		Output Current	Power	Output Voltage	Price
862239	☐	350 mA	6.0-10.0 W	17-29 V/DC	**€ 26.95**
862238	☐	500 mA	6.5-10.0 W	13-32 V/DC	**€ 26.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC | FLAT DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
872628	■	350 mA	0.7-6.0 W	2-18 V/DC	98 mm	46 mm	11 mm	**€ 17.95**
862223	■	350 mA	0.7-12.0 W	2-35 V/DC	128 mm	50 mm	13 mm	**€ 24.95**
862224	■	350 mA	0.7-20.0 W	2-57 V/DC	128 mm	50 mm	13 mm	**€ 28.95**
862130	■	500 mA	1.0-6.0 W	2-12 V/DC	98 mm	46 mm	11 mm	**€ 17.95**
862225	■	500 mA	1.0-12.0 W	2-24 V/DC	128 mm	50 mm	13 mm	**€ 24.95**
862226	■	500 mA	1.0-20.0 W	2-40 V/DC	128 mm	50 mm	13 mm	**€ 28.95**
862048	■	700 mA	1.4-6.0 W	2-9 V/DC	98 mm	46 mm	11 mm	**€ 17.95**
862227	■	700 mA	1.4-12.0 W	2-17 V/DC	128 mm	50 mm	13 mm	**€ 24.95**
862228	■	700 mA	1.4-20.0 W	2-29 V/DC	128 mm	50 mm	13 mm	**€ 28.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC | BASIC DESIGN

- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
180512	■	350 mA	0.7-18.0 W	2-52 V/DC	115 mm	45 mm	21 mm	**€ 23.95**
180513	■	500 mA	1.0-18.0 W	2-38 V/DC	115 mm	45 mm	21 mm	**€ 23.95**
862196	■	500 mA	15.0-30.0 W	30-60 V/DC	127 mm	43 mm	28 mm	**€ 26.95**
862197	■	500 mA	20.0-40.0 W	40-80 V/DC	127 mm	43 mm	28 mm	**€ 29.95**
180514	■	700 mA	1.4-18.0 W	2-26 V/DC	115 mm	45 mm	21 mm	**€ 23.95**
862198	■	700 mA	14.0-30.0 W	21-43 V/DC	127 mm	43 mm	28 mm	**€ 26.95**
862199	■	700 mA	20.0-40.0 W	29-57 V/DC	127 mm	43 mm	28 mm	**€ 29.95**
862157	■	900 mA	19.0-40.0 W	22-44 V/DC	127 mm	43 mm	28 mm	**€ 29.95**
862201	■	1050 mA	20.0-40.0 W	19-38 V/DC	127 mm	43 mm	28 mm	**€ 29.95**

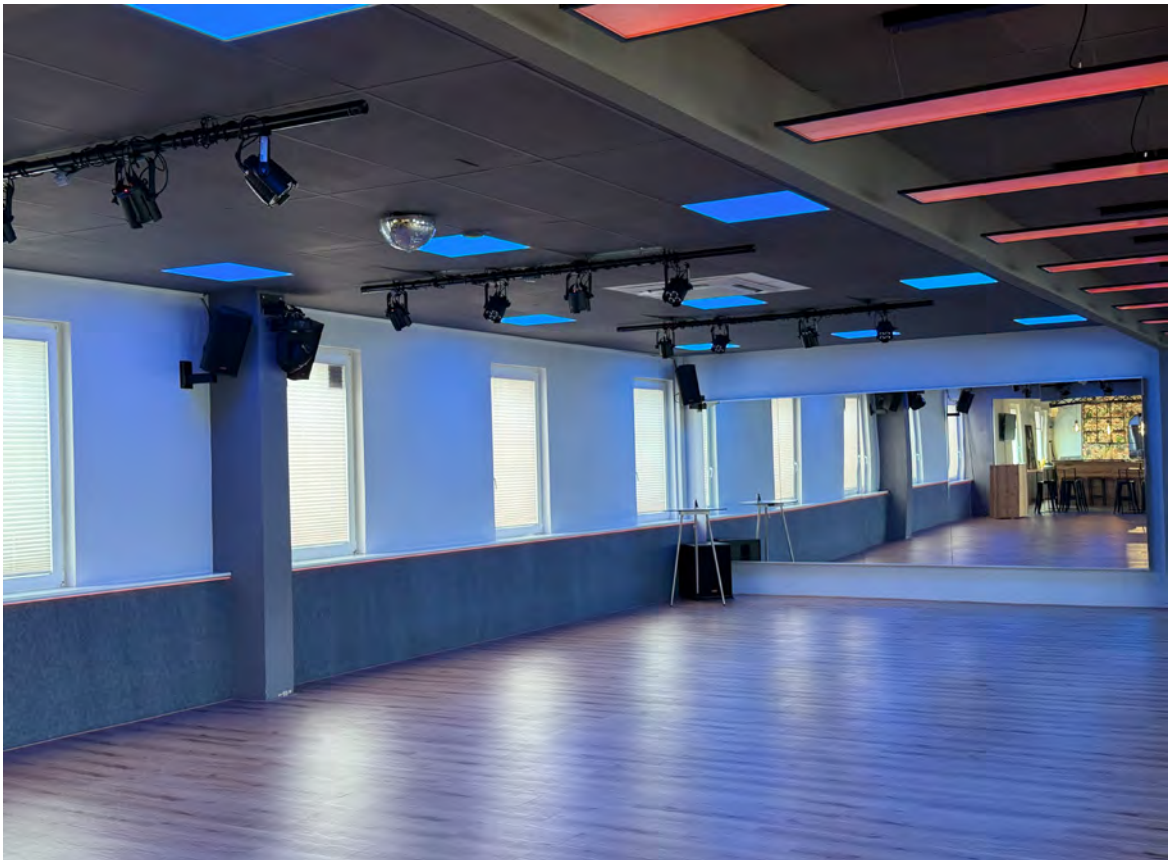

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | MINI DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Mounting Location	Inside, Outside
Rated Input Voltage	220-240 V/AC		

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
872132	■	350 mA	2.1-4.0 W	6-12 V/DC	48 mm	30 mm	20 mm	**€ 19.95**
872014	■	500 mA	2.0-4.0 W	4-8 V/DC	53 mm	27 mm	21 mm	**€ 19.95**
872134	■	700 mA	2.0-4.0 W	2.5-6 V/DC	48 mm	30 mm	20 mm	**€ 19.95**

IP65

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | OCTO DESIGN

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	24 mm
Length	50 mm	Rated Input Voltage	220-240 V/AC
Width	48 mm	Mounting Location	Inside, Outside

Article		Output Current	Power	Output Voltage	Price
862235	■	350 mA	6.3-12.0 W	18-37 V/DC	**€ 29.95**
862236	■	500 mA	6.0-12.0 W	12-24 V/DC	**€ 29.95**
862237	■	700 mA	7.0-12.0 W	10-17 V/DC	**€ 29.95**

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | BASIC DESIGN

NEW

- **Can be dimmed using trailing-edge phase dimmers**
- **Flicker-free**
- **Short circuit, overload and overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Output Current	Power	Output Voltage	Length	Width	Height	Price
862285	■	260 mA	6.0-12.0 W	23-46 V/DC	115 mm	39 mm	22 mm	**€ 32.95**
862202	■	350 mA	4.5-9.0 W	13-26 V/DC	115 mm	39 mm	22 mm	**€ 28.95**
862203	■	350 mA	6.3-12.0 W	18-35 V/DC	115 mm	39 mm	22 mm	**€ 36.95**
862204	■	350 mA	9.8-20.0 W	28-57 V/DC	127 mm	44 mm	28 mm	**€ 39.95**
862205	■	500 mA	10.0-20.0 W	20-40 V/DC	127 mm	44 mm	28 mm	**€ 39.95**
862136	■	500 mA	20.0-40.0 W	40-80 V/DC	166 mm	52 mm	24 mm	**€ 46.95**
862207	■	700 mA	9.8-19.6 W	14-28 V/DC	127 mm	44 mm	28 mm	**€ 39.95**
862208	■	700 mA	19.0-40.0 W	28-56 V/DC	166 mm	52 mm	24 mm	**€ 46.95**
862264	■	900 mA	19.6-40.0 W	22-44 V/DC	166 mm	52 mm	25 mm	**€ 46.95**
862209	■	1050 mA	20.0-40.0 W	19-38 V/DC	166 mm	52 mm	25 mm	**€ 46.95**
862210	■	1050 mA	23.0-45.0 W	22-43 V/DC	166 mm	52 mm	25 mm	**€ 49.95**
862211	■	1300 mA	25.0-50.0 W	20-39 V/DC	166 mm	52 mm	25 mm	**€ 51.95**

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | QUICK DESIGN

- **Particularly quick and easy to install with integrated three-pin feed-through wiring**
- **Push terminals for wires from 0.5 to 1.5 mm²**
- **Push terminals also on secondary side**
- **No additional installation material required**
- **Can be dimmed using compatible [C-compatible] trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Height	32 mm
Length	208 mm	Rated Input Voltage	220-240 V/AC
Width	60 mm	Mounting Location	Inside

Article		Output Current	Power	Output Voltage	Price
862257	■	450 mA	9.9-19.0 W	22-42 V/DC	**€ 36.95**
862258	■	1050 mA	23.1-44.1 W	22-42 V/DC	**€ 46.95**
862259	■	1500 mA	40.5-63.0 W	27-42 V/DC	**€ 56.95**

HEP POWER SUPPLY UNIT CC DIM | G6LT15W350LR-Z

- **Can be dimmed using trailing-edge phase dimmers**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**

Housing	Plastic	Width	40.4 mm
Output Current	350 mA	Height	22 mm
Power	9.1-15 W	Rated Input Voltage	220-240 V/AC
Output Voltage	26-43 V/DC	Mounting Location	Inside
Length	85 mm		

Article	Price
862266 ☐	**€ 32.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | BASIC MULTI-CURRENT

- **Can be dimmed using leading-edge/trailing-edge phase dimmers**
- **Short-circuit-proof, overload protection, overheating protection**

Housing	Plastic	Height	28.5 mm
Length	150 mm	Rated Input Voltage	200-240 V/AC
Width	42.5 mm	Mounting Location	Inside

Article	Technical Description	Price
	350 mA/3.20-14.0 W/9-40 V	
	400 mA/3.60-16.0 W/9-40 V	
	450 mA/4.00-18.0 W/9-40 V	
	500 mA/4.50-20.0 W/9-40 V	
	550 mA/5.00-19.8 W/9-36 V	
	600 mA/5.40-19.8 W/9-33 V	
	650 mA/5.90-19.5 W/9-30 V	
862141 ☐	700 mA/6.30-19.6 W/9-28 V	**€ 46.95**

CC | 110 | SELV | 1 CH | IP20

DEKO-LIGHT MULTI-CURRENT DALI 2.0 POWER SUPPLIES DALI 2 IE-12D| IE-25D | IE-45D | IE-45HD| IE-75D

A must for every electrician: the new MULT-CC DALI 2.0 power supplies from DEKO-LIGHT are a real all-purpose weapon for universal use.

They can be controlled via DALI1 or DALI2 [fully upward and downward compatible] or via Intelli-Push. In this case, the multi-current-power supplies do not require any additional control components and are controlled by means of cost-effective 230V standard push-buttons. With the new Intelli-Push function, they also have a pioneering synchronisation option if one of the connected power supplies no longer runs synchronously with the others.

In addition, the MULTI-power supplies can also be operated undimmed without control as a reliable and universal power supplier. With a total of five models, the new DALI series covers a CC current range from 180mA to 1600mA and power ratings from 4 to 75 watts.

- plastic housing
- compact housing design
- suitable for indoor use
- flicker free
- short-circuit proof and overload protection
- overheat control
- current range adjustable via DIP switch
- DALI 2 BUS ready according to IEC 62386
- fully downward compatible with DALI 1
- dimming range: 1-100%
- dimmable via DALI or touch dimmer function [push] new Intelli-Push function [key combination synchronises all connected power supplies]
- can also be operated without control as universal power supply unit universal power supply [no dimming function]
- 3.2-75 watts and 37 CC variants in only 3 different housing sizes

design example 114 x 52 x 24 mm

design example 133 x 71 x 24 mm

design example 159 x 79 x 30 mm



controllable with DALI2, DALI1
or by touch dim using
a regular 230V push-button

TOUCH-DIM / INTELLI-PUSH VIA 230V PUSH BUTTON WITHOUT ADDITIONAL CONTROL:

press button short	switch lamp on/off
press button long	dim lamp bright/dark/bright
press button for 15 seconds	All connected power supplies are synchronised to the same brightness.

DEKO-LIGHT POWER SUPPLY UNITS CC DIM | MULTI-CURRENT DALI

- **Can be dimmed using Dali1/Dali2**
- **Can be dimmed using 230 V push button [on/off, brightness]**
- **Intelli-Push function [shortcut synchronises all connected power supply units when needed]**
- **Current range adjustable using DIP switch**
- **Can be operated without actuation/dimming**
- **Dimming range 1-100 %**
- **Flicker-free**
- **Short circuit/overload protection, overheating protection**

Housing	Plastic	Mounting Location	Inside
Rated Input Voltage	220-240 V/AC		

Article		Technical Description	Length	Width	Height	Price
862190	■	180 mA/3.2-9.8 W/18-54 V 230 mA/4.0-12.0 W/18-52 V 260 mA/4.0-12.0 W/15-46 V 300 mA/4.5-12.0 W/15-42 V 350 mA/5.2-12.0 W/15-34 V 400 mA/6.0-12.0 W/15-30 V 450 mA/6.8-12.0 W/15-27 V 500 mA/7.5-12.0 W/15-24 V	119 mm	52 mm	22.5 mm	**€ 59.95**
862191	■	260 mA/5.0-15.5 W/20-60 V 350 mA/7.0-20.0 W/20-60 V 400 mA/8.0-24.0 W/20-60 V 450 mA/9.0-25.0 W/20-55 V 500 mA/10.0-25.0 W/20-50 V 550 mA/11.0-25.0 W/20-45 V 600 mA/12.0-25.0 W/20-42 V 700 mA/14.0-25.0 W/20-36 V	119 mm	52 mm	22.5 mm	**€ 64.95**
862192	■	350 mA/8.75-24.5 W/25-70 V 500 mA/12.5-35.0 W/25-70 V 600 mA/15.0-42.0 W/25-70 V 700 mA/17.5-45.0 W/25-64 V 800 mA/20.0-45.0 W/25-56 V 900 mA/22.5-45.0 W/25-50 V 1,050 mA/25.0-45.0 W/21-43 V	135 mm	72 mm	24 mm	**€ 69.95**
862193	■	1,050 mA/14.7-45.0 W/14-43 V 1,150 mA/16.1-45.0 W/14-39 V 1,200 mA/16.8-45.0 W/14-38 V 1,300 mA/18.2-45.0 W/14-35 V 1,400 mA/19.6-45.0 W/14-32 V 1,500 mA/21.0-45.0 W/14-30 V 1,600 mA/22.4-45.0 W/14-28 V	135 mm	72 mm	24 mm	**€ 69.95**
862194	■	1,050 mA 26.3-74.5 W/25-71 V 1,150 mA 28.8-74.8 W/25-65 V 1,200 mA 30.0-74.4 W/25-62 V 1,300 mA 32.5-75.5 W/25-58 V 1,400 mA 35.0-74.2 W/25-53 V 1,500 mA 37.5-75.0 W/25-50 V 1,600 mA 40.0-75.2 W/25-47 V	159 mm	79 mm	30 mm	**€ 84.95**

CC | 110 | SELV | 1 CH | IP20

MEANWELL POWER SUPPLY UNITS CC DIM | MULTI LCM DALI

- **Can be dimmed using DALI2, DALI1 or Intelli-Push [Touch-Dim via 230 V button]**
- **Current range adjustable using DIP switch**
- **Can be operated without actuation/dimming**
- **Flicker-free**

Housing	Plastic	Mounting Location	Inside
Height	23 mm		

Article		Technical Description	Length	Width	Rated Input Voltage	Price
		350 mA/0.7-35.0 W/2-100 V 500 mA/1.0-40.0 W/2-80 V 600 mA/1.2-40.0 W/2-67 V 700 mA/1.4-40.0 W/2-57 V 900 mA/1.8-40.5 W/2-45 V				
862247	☐	1,050 mA/2.1-42.0 W/2-40 V	123.5 mm	81.5 mm	180-295 V/AC	**€ 104.95**
		350 mA/2.1-18.9 W/6-54 V 500 mA/3.0-25.2 W/6-50 V 600 mA/3.6-25.2 W/6-42 V 700 mA/4.2-25.2 W/6-36 V 900 mA/5.4-25.2 W/6-28 V				
862246	☐	1,050 mA/6.3-25.2 W/6-24 V	105 mm	68 mm	180-277 V/AC	**€ 89.95**
		500 mA/1.0-45.0 W/2-90 V 600 mA/1.2-54.0 W/2-90 V 700 mA/1.4-60.3 W/2-86 V 900 mA/1.8-60.3 W/2-67 V 1,050 mA/2.1-59.9 W/2-57 V				
862248	☐	1,400 mA/2.8-59.0 W/2-42 V	123.5 mm	81.5 mm	180-295 V/AC	**€ 109.95**

TCI POWER SUPPLY UNIT CC/CV DIM | JOLLY MD PUSH

- **Dimmable with leading-edge phase dimmers**
- **Constant current [CC] or constant voltage [CV] can be adjusted via DIP switch**
- **Can be dimmed using leading-edge phase dimmers or Push [Touch-Dim via 230 V button]**
- **Master/slave operation of multiple power supply units via sync cable [accessory]**

Housing	Plastic	Height	35 mm
Length	165 mm	Rated Input Voltage	220-240 V/AC
Width	48 mm	Mounting Location	Inside

Article		Technical Description	Price
		current constant 350 mA/0.7-16.5 W/2-47 V 500 mA/1.0-23.5 W/2-47 V 550 mA/1.1-25.9 W/2-47 V 700 mA/1.4-32.0 W/2-46 V 750 mA/1.5-32.0 W/2-43 V voltage constant 12 V/10.0 W 24 V/20.0 W	
561201	☐	28 V/22.0 W	**€ 94.95**

Accessories

561202	Sync cable		**€ 10.95**

electr. data		dimmable via				usage / design			electrical limit values		power supply	
current strength	power	electronic power supply	conventional transformer	leading edge	leading cut-off	indoor	outdoor	design	capacitive load	max. quantity per automatic circuit breaker	item number	page
electronic power supply units:												
12V	0,0-70,0 W	x			x	x		basic	97.79nF	B10A=8, B16A=14, C10A=18, C16A=29	180515	892
12V	0,0-105,0 W	x			x	x		basic	139.58nF	B10A=5, B16A=9, C10A=12, C16A=19	180529	892
wound transformers:												
12V	11,5-20,0 W		x	x		x		*			000097	892
12V	34,5-60,0 W		x	x		x		*			000099	892
12V	43,5-75,0 W		x	x		x	x	*			000140	893
12V	60,5-105,0 W		x	x		x		*			000107	892
12V	86,5-150,0 W		x	x		x		*			000103	892
12V	86,5-150,0 W		x	x		x	x	*			000141	893
12V	115,0-200,0 W		x	x		x		*			000104	892
12V	172,5-300,0 W		x	x		x		*			000106	892
12V	172,5-300,0 W		x	x		x	x	*			000142	893
12V	287,5-500,0 W		x	x		x		*			000109	892

DEKO-LIGHT TRANSFORMER CV DIM | ULTRA HALOGEN 12 VOLT/AC

- **Can be dimmed using trailing-edge phase dimmers**
- **11.5 V lamp-friendly voltage**
- **Flicker-free**
- **Secured against short circuits and overloads**
- **Overheating protection**
- **180515: 0-70 W halogen or 0-50 W LED/max. 6 LEDs**
- **180529: 0-105 W halogen or 0-50 W LED/max. 6 LEDs**

Housing	Plastic	Height	28 mm
Output Voltage	11.5 V/AC	Rated Input Voltage	220-240 V/AC
Length	113 mm	Mounting Location	Inside
Width	44 mm		

Article		Power	Price
180515	■	0.0-70.0 W	**€ 17.95**
180529	■	0.0-105.0 W	**€ 22.95**

ABN TRANSFORMERS CV DIM | 12 VOLT/AC

- **Conventional wound transformer [L load]**
- **11.5 V lamp-friendly voltage**
- **Can be dimmed using leading-edge phase dimmers**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Output Voltage	11.5 V/AC	Mounting Location	Inside

Article		Power	Apparent power	Length	Width	Height	Price
000097	□	11.5-20.0 W	20 VA	82 mm	56 mm	50 mm	**€ 89.95**
000099	□	34.5-60.0 W	60 VA	100 mm	70 mm	61 mm	**€ 129.95**
000107	□	60.0-105.0 W	105 VA	107 mm	78 mm	66 mm	**€ 159.95**
000103	□	86.5-150.0 W	150 VA	130 mm	88 mm	78 mm	**€ 189.95**
000104	□	115.0-200.0 W	200 VA	130 mm	88 mm	88 mm	**€ 219.95**
000106	□	172.0-300.0 W	300 VA	130 mm	88 mm	103 mm	**€ 239.95**
000109	□	287.5-500.0 W	500 VA	177 mm	107 mm	130 mm	**€ 429.95**

Accessories for **000103**, **000104**, **000106**
000111 Housing Pyra 120-300 VA **€ 19.95**

Accessories for **000107**
000110 Housing Pyra 105 VA **€ 19.95**

IP67

ABN TRANSFORMERS CV DIM IP | 12 VOLT/AC

- **Housing made of UV-resistant plastic**
- **Conventional wound transformer [L load]**
- **11.5 V lamp-friendly voltage**
- **Primary connection line 1.9 m [H05RR-F 2x0.75 mm²]**
- **Secondary connection line 0.5 m [H05RR-F 2x2.5 mm²]**
- **Can be dimmed using leading-edge phase dimmers**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Output Voltage	11.5 V/AC	Mounting Location	Inside, Outside

Article		Power	Apparent power	Length	Width	Height	Price
000140	■	43.0-75.0 W	75 VA	108 mm	81 mm	66 mm	**€ 169.95**
000141	■	86.0-150.0 W	150 VA	130 mm	93 mm	78 mm	**€ 209.95**
000142	■	172.0-300.0 W	300 VA	130 mm	93 mm	102 mm	**€ 269.95**

CV | 1 CH | IP67

ON
W
OFF
IP65

CONTROLLER

898 RF-Smart

920 Casambi Bluetooth

922 DMX controller / dimmer

926 DALI PWM dimmer

controller

■ □
page 901

■
page 904

■
page 906

■
page 907

□ ■
page 908

■
page 913

□
page 914

□
page 917

□
page 918

■
page 919

□
page 920

□
page 920

■ □
page 921

□
page 921

■
page 922

■
page 923

■
page 924

■
page 925

□
page 927

□
page 928

□
page 928

□
page 929

□
page 929

RF-SMART: COMPONENTS

We hereby present the multifunctional RF-smart control system from DEKO-LIGHT. It enables the switching and dimming of devices with 230V mains voltage and offers LED dimmers for LED strips with 1-5 channels from 12V to 48V voltage. Dimmers in IP67 design are available for outdoor use. The system is complemented by luminaires with an integrated RF module, such as outdoor spotlights and LED retrofit luminaires. RF-smart components can be controlled with RF radio remote controls and Zigbee 3.0 compatible radio modules. This enables control via smartphone, tablet or voice and offers comprehensive smart home functions. Installation is quick and easy.

RF-smart — simple control via RF remote controls

zigbee — smart control via ZigBee 3.0

Taster — control via push-button

remote controls
The remote controls can be used to control the components on different channels in one or more zones. The remote controls are available as mobile versions or for wall mounting.

- 1 zone [1-2 oder 3-5 channels]
- 4 zones [1-5 channels]
- 8 zones [1-5 channels]
- power supply via 2x AAA batteries [3V]
- 230V direct connection [optional]

PIR motion detector
The PIR motion detector detects movement at an angle of 120° and a range of 1 to 7 metres - ideal for precise, energy-efficient lighting control.

- power supply via 1x CR123A battery

page 918

repeater
With the repeater, the wireless range of the remote controls can be extended by up to 30 metres.

- 230V AC

page 917

illuminants
The LED retrofit illuminants are equipped with an RF-smart radio module and fit into standard GU10 and E27 sockets.

- GU10 RGB+CCT
- E27 A60/MAX RGB+CCT
- 230V AC
- controllable via remote control and ZigBee 3.0

RF-smart zigbee

page 938 page 941 page 942

luminaires
The RF-smart lights are equipped with a ZigBee-compatible wireless module and can therefore also be controlled via the market-leading smart home systems from Amazon, Google & Co.

- FLOOD RGB+CCT
- SPOT RGB+CCT
- 230V AC
- IP67 / IP44
- controllable via remote control and ZigBee 3.0

RF-smart zigbee

page 580 page 546

Triac dimmer
The triac dimmers work with phase cut-off dimming and enable the switching and/or dimming of devices with 230V mains voltage.

- 230V AC
- IP20 / IP67
- on/off, Dimmen
- controllable via remote control, push-button and ZigBee 3.0

RF-smart zigbee Taster

page 904 page 905

LED dimmer
The LED dimmers can be used to control LED stripes with 1-5 channels and 12V to 48V voltage.

- 12-48V DC
- IP20 / IP67
- on/off, dimming, automatic programmes, RGB/CCT colour settings
- controllable via remote control, push-button and ZigBee 3.0

RF-smart zigbee Taster

page 906 page 907

LIVING SPACE

The choice is yours: equip existing luminaires and LED stripes with a remote-controllable dimmer, replace the illuminants with an LED retrofit version or benefit from ZigBee compatibility to control the lighting via Amazon Alexa and other smart home assistants.

- living spaces
- garden
- path lighting

TRADE

Whether in shops, a bar or on exhibition stands - with RF-smart you can set up and programme different lighting zones and control them via mobile and permanently installed remote controls.

- shop fitting
- Bar/Restaurant
- Hotel
- trade fair

COMPANY

Modern company buildings are becoming ever smarter and, thanks to the progressive networking of all components – including lighting – are making their contribution to energy efficiency and therefore also to positive sales development.

- offices
- meeting rooms
- foyers

RF-smart zigbee

DEKO-LIGHT RF-SMART STARTER-SET 1 230V TRIAC DIMMER + RF-REMOTE CONTROL

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V [R/C] components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843503 + 1x 843508**

Housing	Plastic	Output Current	1.36 A
Length	25 mm	Rated Input Voltage	100-240 V/AC
Width	70 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Height	70 mm		
Power	1.0-300 W	Channels	1

Article		Price
843500	■□	**€ 99.95**

1 CH | IP20

DEKO-LIGHT RF-SMART STARTER-SET 2 LED-DIMMER + RF-REMOTE CONTROL SINGLE/CCT

- **Dimmable brightness and colour saturation**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with all RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843505 + 1x 843508**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	24 mm	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Width	70 mm		
Height	70 mm	Channels	1, 2
Output Current	20 A		

Article		Price
843501	■□	**€ 99.95**

CV | 1 CH | 2 CH | IP20

DEKO-LIGHT RF-SMART STARTER-SET 3 LED-DIMMER + RF-REMOTE CONTROL RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of RGB/RGBW/RGB+CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **One control zone**
- **Remote control requires 2x AAA batteries [not included in the scope of delivery]**
- **Set consisting of: 1x 843505 + 1x 843510**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	23 mm	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Width	47 mm		
Height	120 mm	Channels	3, 4, 5
Output Current	20 A		

Article	Price
843502 ■□	**€ 99.95**

CV | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART TRIAC DIMMER 230 V

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V (R/C) components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**

Output Current	1.36 A	Power	1.0-300 W
Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	25 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Width	49 mm		
Height	49 mm	Channels	1

Article		Price
843503	■	**€ 69.95**

1 CH | IP20

DEKO-LIGHT RF-SMART OUTDOOR TRIAC-DIMMER 230V

- **Dimmable brightness**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of 230 V (R/C) components**
- **Minimum brightness adjustable in ten steps**
- **Adjustable switch mode [dimming disabled, additional load relays can be connected]**
- **Up to 10x LED-LM/7x LED ballast units can be connected [max. 300 W for R/C loads]**
- **IP67 outdoor distribution board with up to four cable entry points from 4-14 mm and two blanking plugs**

Output Current	1.36 A	Power	1.0-300 W
Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	170 mm	Control	RF-Smart, Trailing-edge dimmer, ZigBee 3.0, Intelli Push-Dim
Width	155 mm		
Height	65 mm	Channels	1

Article		Price
843504	■	**€ 89.95**

1 CH | IP67

DEKO-LIGHT RF-SMART LED-DIMMER 5-IN-1, 5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Intelli-Push dim function [on/off, brightness] via potential-free push-button**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	120 mm	Control	RF-Smart, ZigBee 3.0, Intelli Push-Dim
Width	23 mm		
Height	47 mm	Channels	1, 2, 3, 4, 5
Output Current	20 A		

Article		Price
843505	■	**€ 69.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20 | III

DEKO-LIGHT RF-SMART OUTDOOR LED-DIMMER 5-IN-1, 5 CHANNEL SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness and colour saturation**
- **16 million adjustable colours and adjustable colour temperature**
- **18 pre-installed automatic programs**
- **Can be controlled with RF-smart wireless remote controls [2.4 GHz, range approx. 30 m, not included in the scope of delivery]**
- **Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo [Alexa], Google Assistant, Tuya [relevant gateway required, outdoor range up to 100 m]**
- **Program and remote control synchronisation when operating multiple RF-smart components [repeater function]**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**
- **Flicker-free [images/videos]**
- **Power: max. 20 A/controller, max. 10 A/channel**
- **12 V = 240 W, 24 V = 480 W, 48 V = 960 W**
- **Input/output pre-fitted on each 20 cm connecting cable**

Housing	Plastic	Output Current	20 A
Length	185 mm	Rated Input Voltage	12-48 V/DC
Width	31 mm	Control	RF-Smart, ZigBee 3.0
Height	87 mm	Channels	1, 2, 3, 4, 5

Article		Price
843506	■	**€ 109.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP67

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL SINGLE/CCT

- **Dimmable brightness**
- **Adjustable colour temperature, if necessary**
- **One control zone**
- **Range approx. 30 m**
- **Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	24 mm	Control	RF-Smart
Ø	70 mm	Channels	1, 2

Article		Price
843508	☐	**€ 38.95**
843509	■	**€ 38.95**

1 CH | 2 CH | IP20 | III

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours**
- **Automatic programs can be controlled**
- **One control zone**
- **Range approx. 30 m**
- **Can be used as a wall-mounted or hand-held remote control [magnetic holder included in the scope of delivery]**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	24 mm	Control	RF-Smart
Ø	70 mm	Channels	3, 4, 5

Article		Price
843510	☐	**€ 38.95**
843511	■	**€ 38.95**

3 CH | 4 CH | 5 CH | IP20 | III

DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE

- **Dimmable brightness**
- **Up to three different control zones**
- **Three storable scenes**
- **Range approx. 30 m**
- **Can be used as a stand/handheld remote control**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls single components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1
Height	44 mm		

Article		Price
843523	■	**€ 49.95**

1 CH | IP20

DEKO-LIGHT RF-SMART RF REMOTE CONTROL, 3 ZONES, SINGLE/CCT

- **Dimmable brightness**
- **Up to three different control zones**
- **Three storable scenes**
- **Range approx. 30 m**
- **Can be used as a stand/handheld remote control**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls CCT and/or single components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1, 2
Height	44 mm		

Article		Price
843524	■	**€ 49.95**

1 CH | 2 CH | IP20

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL, 3 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Can be used as a stand/handheld remote control**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Separate white light button**
- **Automatic program and program speed can be controlled**
- **Up to three different control zones**
- **Range approx. 30 m**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Controls single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	143 mm	Control	RF-Smart
Width	57 mm	Channels	1, 2, 3, 4, 5
Height	44 mm		

Article		Price
843525	■	**€ 49.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART RF-REMOTE CONTROL 8 ZONES SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Separate white light button**
- **Automatic program and program speed can be controlled**
- **Up to eight different control zones**
- **Range approx. 30 m**
- **Wall bracket included in the scope of delivery**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	19 mm	Control	RF-Smart
Width	153 mm	Channels	1, 2, 3, 4, 5
Height	47 mm		

Article	Price
843512 ■	**€ 49.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART RF-WALL REMOTE CONTROL 4 ZONES, 3V, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to four different control zones**
- **Range approx. 30 m**
- **Magnetic wall bracket included in the scope of delivery**
- **Very simple installation and operation**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	86 mm	Control	RF-Smart
Width	86 mm	Channels	1, 2, 3, 4, 5
Height	16 mm		

Article		Price
843513	☐	**€ 69.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

RF-smart

DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 4 ZONES, 230 V, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Wall-mounted remote control for fixed installation**
- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to four different control zones**
- **Range approx. 30 m**
- **Simple operation**
- **Installation on 68 mm single switch box**
- **230 V/AC mains operation**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	100-240 V/AC
Length	86 mm	Control	RF-Smart
Width	86 mm	Channels	1, 2, 3, 4, 5
Height	9 mm		

Article		Price
843522	☐	**€ 74.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

DEKO-LIGHT RF-SMART RF WALL-MOUNTED REMOTE CONTROL, 8 ZONES, SINGLE/CCT/RGB/RGBW/RGB+CCT

- **Dimmable brightness**
- **Adjustable colour saturation and colour temperature, if necessary**
- **16 million adjustable colours, if necessary**
- **Automatic program and program speed can be controlled**
- **Separate white light button**
- **Up to eight different control zones**
- **Range approx. 30 m**
- **Delayed switch-off function [60 s]**
- **Simple commissioning**
- **Battery-operated with 2x AAA [not included in the scope of delivery]**
- **Numerous installation options [68 mm switch socket for operating with optional 230 V power supply]**
- **Low power consumption**
- **Control of single/CCT/RGB/RGBW/RGB+CCT components**

Housing	Plastic	Rated Input Voltage	3 V/DC
Length	20 mm	Control	RF-Smart
Width	106 mm	Channels	1, 2, 3, 4, 5
Height	146 mm		

Article		Price
843514	☐	**€ 109.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20

Accessories

872144 RF-smart, 230 V power supply for 8-zone wall-mounted remote control (3 V DC) **€ 16.95**

DEKO-LIGHT RF-SMART RF-REPEATER

- **Extends the range of an RF remote control by up to 30 m**
- **Supports up to 12 remote controls and/or 12 zones simultaneously**
- **Suitable for outdoor and indoor use**
- **Incl. 1 m connecting cable with IP44 mains plug**
- **Compatible with all RF-smart remote controls**

Housing	Plastic	Height	34 mm
Length	103 mm	Rated Input Voltage	100-240 V/AC
Width	34 mm	Control	RF-Smart

Article		Price
843507	☐	**€ 34.95**

IP67

DEKO-LIGHT RF-SMART PIR MOTION DETECTOR

- **Can be rotated/swivelled 360°**
- **Self-adhesive magnetic holder included in the scope of delivery**
- **Very simple installation and operation**
- **Detection angle: 120°**
- **Detection range: 1-7 m**
- **RF range: approx. 30 m**
- **Switches on all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)**
- **Motion detector can switch several dimmers, lights/lamps at the same time**
- **Controls the night light mode of all RF-smart dimmers, lights/lamps (843512 required for programming)**
- **Preset switching time and daylight threshold value**
- **Switching time can be adjusted (843512 required for programming)**
- **Daylight threshold value can be adjusted (843512 required for programming)**
- **Battery-operated with 1x CR123A [not included in the scope of delivery]**
- **Low power consumption**

Housing	Plastic	Rated Input Voltage	3 V/DC
Height	56 mm	Control	RF-Smart
Ø	49 mm	Channels	1

Article		Price
843527	☐	**€ 38.95**

1 CH | IP54 | 🔋

Accessories

843528	RF-smart, Photo battery for PIR motion detector, CR 123 A, lithium 3 V / 1600 mAh	**€ 9.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 69.95**
843504	RF-smart, Triac dimmer, 230 V, 300 W, IP67	**€ 89.95**
843505	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20	**€ 69.95**
843506	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67	**€ 109.95**
843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 46.95**
843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 46.95**
843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 64.95**
843518	RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65	**€ 249.95**
843519	RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65	**€ 349.95**
843520	RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65	**€ 549.95**
843521	RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65	**€ 239.95**
843530	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white	**€ 199.95**
843531	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black	**€ 199.95**

RF-SMART DMX GATEWAY

- **RF gateway for operation on standard DMX controllers**
- **Easy to couple DMX systems to the RF-smart system**
- **Controls all RF-smart dimmers, lights/lamps (even when combined with other RF-smart remote controls)**
- **DMX start address can be adjusted via menu keys**
- **Status LED**
- **Up to 16 differently controllable zones of 1-5 channels**
- **Suitable for single/CCT/RGB/W+CCT components**
- **Occupies 80 DMX channels (regardless of actual channel usage)**
- **Power supply via supplied USB cable (USB power adapter 5 VDC not included in the scope of delivery)**
- **Does not support the RF-smart repeater function**
- **RF range: approx. 30 m**

Housing	Plastic	Power	2.5 W
Length	188 mm	Rated Input Voltage	5 V/DC
Width	47 mm	Control	RF-Smart
Height	23 mm	Channels	1, 2, 3, 4, 5

Article		Price
843529	■	**€ 59.95**

1 CH | 2 CH | 3 CH | 4 CH | 5 CH | IP20 | III

Accessories

930887	USB-A plug-in power supply 5 V DC, 1,000 mA, black	**€ 8.95**
843503	RF-smart, Triac dimmer, 230 V, 300 W, IP20	**€ 69.95**
843504	RF-smart, Triac dimmer, 230 V, 300 W, IP67	**€ 89.95**
843505	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP20	**€ 69.95**
843506	RF-smart, LED dimmer 5-in-1, 5 channel, 12-48 V, 20 A, IP67	**€ 109.95**
843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree	**€ 46.95**
843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad	**€ 46.95**
843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad	**€ 64.95**
843518	RF-smart, Flood, 230 V, 30 W, RGB+CCT, IP65	**€ 249.95**
843519	RF-smart, Flood, 230 V, 50 W, RGB+CCT, IP65	**€ 349.95**
843520	RF-smart, Flood, 230 V, 100 W, RGB+CCT, IP65	**€ 549.95**
843521	RF-smart, Spot, 230 V, 25 W, RGB+CCT, IP65	**€ 239.95**
843530	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, white	**€ 199.95**
843531	Eventus RF-smart, 30W, RF+Zigbee, RGB/CCT, black	**€ 199.95**

CASAMBI BLUETOOTH CBU-TED | 230 V SWITCHING/DIMMING

- **suitable for R loads [incandescent bulb, high-voltage halogen]**
- **suitable for C loads [dimmable high-voltage LED, electrical power supply units]**
- **Power in switching range: incandescent bulb, high-voltage halogen, high-voltage LED, electrical ballasts: max. 150 W**
- **Output in dimming range: dimmable high-voltage LED, electrical ballasts: max. 50 W/ max. two components**
- **suitable for 230 V AC lights**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**
- **Free smartphone app [Android and Apple]**

Housing	Plastic	Power	1.0-50 W
Length	40.4 mm	Rated Input Voltage	220-240 V/AC
Width	36.3 mm	Control	Casambi
Height	14 mm	Channels	1

Article		Price
843008	☐	**€ 144.95**

1 CH | IP20

CASAMBI BLUETOOTH CBU-ASD | DALI/0-10 V | 1-10 V

- **Module generates either DALI, 0-10 V or 1-10 V control signal**
- **Control signal for each ballast unit or power supply unit**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**
- **Free smartphone app [Android and Apple]**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Length	56.5 mm	Control	Casambi
Width	35.8 mm	Channels	1
Height	22.3 mm		

Article		Price
843011	☐	**€ 149.95**

1 CH | IP20

CASAMBI BLUETOOTH CBU-PWM4 | LED ONE- TO FOUR-CHANNEL DIMMER

- **Module suitable for controlling 12 V/24 V LED strips**
- **One to four channels [WW, CW, WW-CW, RGB, RGBW]**
- **Power: 144 W at 24 V, 72 W at 12 V**
- **Install the Casambi module in a distributor box, suspended ceiling or similar**
- **Control and configuration via smartphone app**
- **Free smartphone app [Android and Apple]**

Housing	Plastic	Output Current	6 A
Length	72.6 mm	Rated Input Voltage	12-24 V/DC
Width	30 mm	Control	Casambi
Height	18 mm	Channels	1, 2, 3, 4

Article		Price
843037	☐	**€ 179.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | IP20 | III

CASAMBI BLUETOOTH WALL-MOUNTED CONTROLLER XPRESS

- **Bluetooth wall controller compatible with Casambi system**
- **Installation with screws or adhesive tape**
- **No wiring required**
- **Battery operation [3 V button cell]**
- **Configured via smartphone app**
- **Controlled via free smartphone app [Android and Apple]**

Housing	Plastic	Height	12 mm
Length	90 mm	Rated Input Voltage	3 V/DC
Width	90 mm	Control	Casambi

Article		Price
843049	■	**€ 399.95**
843050	☐	**€ 399.95**

IP20

EUROLITE DMX-CONTROLLER LED COLOR CHIEF

- **Simple, intuitive DMX control and programming via display**
- **Innovative lighting control for catering, bars, event spaces etc.**
- **USB connection for storing data, restoring programming and updating firmware**
- **Up to eight individually controllable zones/devices**
- **Easy control of LED strips, lights, headlights and similar with 1 to 6 colours or light effects with up to 30 channels**
- **Extensive, pre-installed device library with many common applications**
- **Further devices can be easily added manually**
- **Eight colour effects are directly selectable**
- **For each device, three additional channels can be freely allocated [for example for special functions, movements or similar]**
- **24 storage locations for permanently stored light moods (scene memory)**
- **Cycle control for programmed running lights via music signal**
- **Function keys for blackout, auto, music control and strobe effect**
- **Total dimming, blending time between individual scenes convenient to adjust**
- **3-pin XLR connection**
- **Operation as rack installation [19 inch/3 height units] or tabletop device**
- **Plug-in power supply (included in scope of delivery)**

Housing	Metal	Height	85 mm
Length	482 mm	Rated Input Voltage	100-240 V/AC
Width	132 mm	Channels	1, 2, 3, 4, 5, 6

Article		Price
843047	■	**€ 469.95**

DMX | 1 CH | 2 CH | 3 CH | 4 CH | 5 CH | 6 CH | IP20

Accessories

882271	DMX adapter cable CAT5 to DMX XLR plug	**€ 54.95**
819066	DMX connecting cable IP20 1 m	**€ 9.95**
819070	DMX connecting cable IP20 5 m	**€ 21.95**
819072	DMX connecting cable IP20 10 m	**€ 34.95**
843279	MULTI-LED dimmer 1-4 channels, DMX/auto/manual, 12-48 V, 20 A, flicker-free	**€ 114.95**
843054	DMX/RDM 4 CH CC decoder	**€ 119.95**
843273	LED dimmer R-DMX 3+1 channel/12-24 V	**€ 86.95**

DEKO-LIGHT MULTI-DIMMER 4, 4-CHANNEL 3-IN-1 CONTROL/PWM DIMMER

- **Simple programming of all settings via display and four-button operating menu**
- **3-in-1 control: DMX/automatic/manual**
- **Use as 1-, 2-, 3- or 4-channel dimmer**
- **24 pre-installed colour change programs [automatic mode]**
- **All 4 channels can be dimmed individually [manual colour mixing]**
- **Flicker-free 2 kHz for images and videos**
- **Saves the last mode after power failure (memory function)**
- **DMX signal/master-slave can be plugged in via CAT5**

Power:

- **4x 60 W [240 W] at 12 V**
- **4x 120 W [480 W] at 24 V**
- **4x 240 W [960 W] at 48 V**
- **max. 20 A [4x 5 A per channel]**

Housing	Metal	Output Current	20 A
Length	116 mm	Rated Input Voltage	12-48 V/DC
Width	57 mm	Channels	1, 2, 3, 4
Height	26.8 mm		

Article		Price
843279	■	**€ 114.95**

CV | DMX | 1 CH | 2 CH | 3 CH | 4 CH | IP20

DEKO-LIGHT R-DMX 3+1

- **Compliant with DMX 512/1990, RDM protocol/2009**
- **Supports automatic DMX addressing**
- **Incl. top-hat-rail adapter**
- **Incl. 2 m CAT5 cable [RJ45]**
- **Flicker-free**
- **Connection: Screw terminals**
  Power:
- **4x 48 W [192 W] at 12 V**
- **4x 96 W [384 W] at 24 V**
- **max. 16 A [4x 4 A per channel]**

Housing	Metal	Output Current	16 A
Length	120 mm	Rated Input Voltage	12-24 V/DC
Width	43 mm	Channels	1, 2, 3, 4
Height	23 mm		

Article		Price
843273	■	**€ 86.95**

CV | DMX | 1 CH | 2 CH | 3 CH | 4 CH | IP20 | III

DECO-LIGHT LED DMX/R-DMX DIMMER 4 CC

- **Simple programming of all settings via display and four-button operating menu**
- **Can be controlled using DMX**
- **Use as a one to four-channel dimmer**
- **Controls four independent constant-current [CC] LED lights via any conventional DMX or RDM DMX controller**
- **Constant current for each channel can be individually adjusted between 200 and 1,600 mAh in increments of 50 mA**
- **Output voltage for CC-compatible lights: 1-42 V**
- **Flicker-free 2 kHz for images and videos**
- **Secured against short circuits and overloads**
- **Connection: Screw terminals**
- **Performance: max. 4x 60 W**

Housing	Metal	Output Current	200-1600 mA
Length	135 mm	Rated Input Voltage	12-50 V/DC
Width	69 mm	Channels	1, 2, 3, 4
Height	36 mm		

Article		Price
843054	■	**€ 119.95**

CC | DMX | 1 CH | 2 CH | 3 CH | 4 CH | IP20 | III

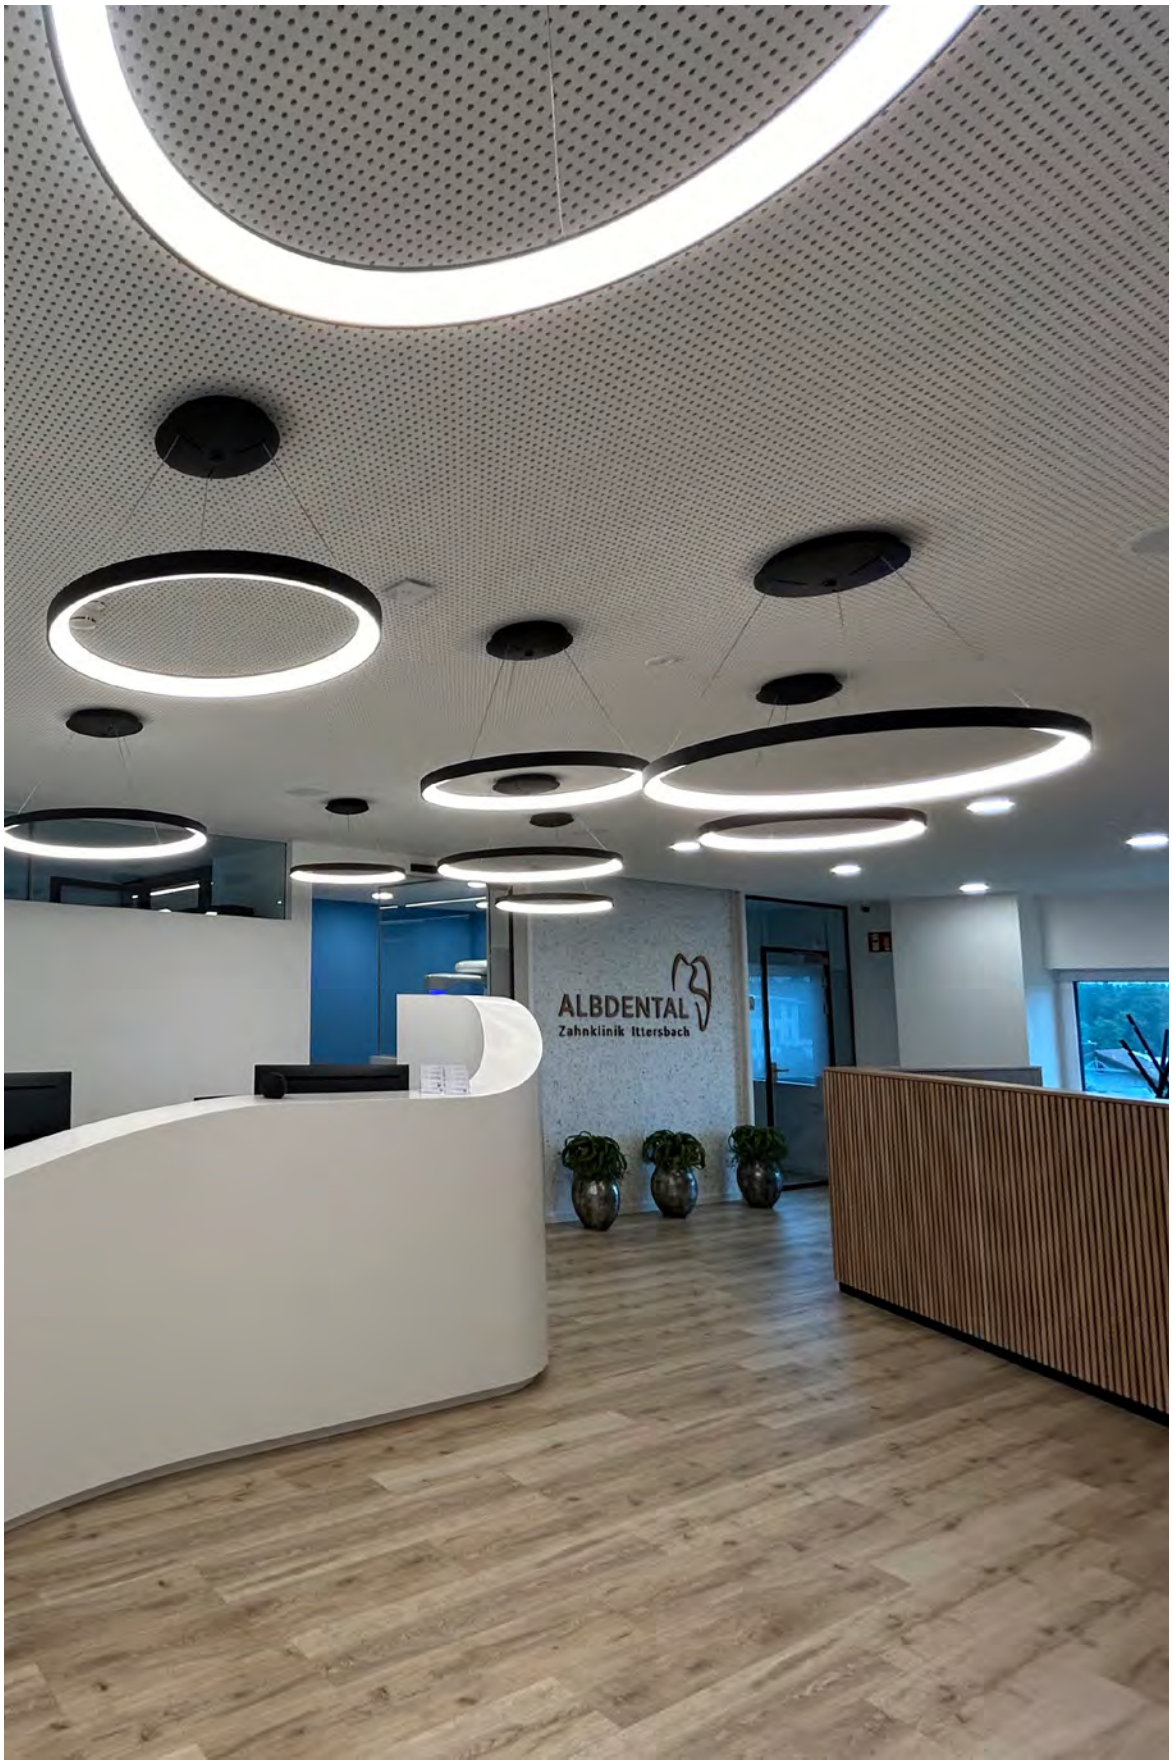
ALBDENTAL
Zahnklinik Ittersbach

DALI TRIAC DIMMER

- **Can be controlled using DALI1/DALI2, DT6, one channel**
- **Can alternatively be controlled using push-dim button [8-230 V/AC]**
- **Dimmable brightness/trailing-edge phase dimmers**
- **Adjustable minimum brightness [push-dim only]**
- **Optimal for extending DALI systems or installing in Triac dimmable lighting due to its compact size**
- **LED output [C load] max. 200 W/230 V/max. 10x LM or ECG**
- **Halogen output [R load] 400 W/230 V, no limit on the number of lamps**
- **Power consumption at DALI bus: max. 2 mA**

Housing	Plastic	Output Current	1.8 A
Length	45.5 mm	Rated Input Voltage	100-240 V/AC
Width	45.5 mm	Control	DALI 1 / DT6, DALI 2 / DT6, Push-Dim
Height	20.3 mm		
Power	1.0-400 W	Channels	1

Article		Price
843340	☐	**€ 74.95**

1 CH | IP20

Accessories

930942 DIN rail/mounting adapter for Dali Triac dimmer **€ 1.95**

DALI

DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 1/2 CHANNEL

- **DT6 = occupies 2 Dali channels**
- **2x 1-channel mode (WW/CW) or 1x 2 channel mode (WW-CW, CCT)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 2x 8 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT6, DALI 2 / DT6
Width	51 mm		
Height	23 mm	Channels	1, 2
Output Current	16 A		

Article	Price
843341 ☐	**€ 84.95**

CV | 1 CH | 2 CH | IP20

DALI

DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 2 CHANNEL

- **DT8 = occupies 1 Dali channel**
- **1x 2-channel mode (WW-CW, CCT)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 2x 8 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT8, DALI 2 / DT8
Width	51 mm		
Height	23 mm	Channels	2
Output Current	16 A		

Article	Price
843342 ☐	**€ 84.95**

CV | 2 CH | IP20

DEKO-LIGHT DALI LED PWM DIMMER 12-48 V, 3/4 CHANNEL

- **DT6 = occupies 4 Dali channels**
- **1x 3-channel mode (RGB) or 1x 4-channel mode (RGBW)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 4x 4 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT6, DALI 2 / DT6
Width	51 mm		
Height	23 mm	Channels	1, 2, 3, 4
Output Current	16 A		

Article	Price
843343 ☐	**€ 94.95**

CV | 1 CH | 2 CH | 3 CH | 4 CH | IP20

DEKO-LIGHT DALI DT8 LED PWM DIMMER 12-48 V, 4 CHANNEL

- **DT8 = occupies 1 Dali channel**
- **1x 4-channel mode (RGBW)**
- **Can be dimmed 0-100 %, overload protection, reverse polarity protection**
- **Flicker-free, suitable for videos (PWM 2 kHz)**
- **For 12 V-48 V DC (CV) LED strips/lights**
- **Output power: 4x 4 A = 16 A**

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	167 mm	Control	DALI 1 / DT8, DALI 2 / DT8
Width	51 mm		
Height	23 mm	Channels	4
Output Current	16 A		

Article	Price
843344 ☐	**€ 94.95**

CV | 4 CH | IP20

ILLUMINANTS

934 MR16 / GU53

935 G9 - GU10

939 E27

943 R7s - GX53

illuminant

page 934

page 934

page 935

page 936

page 936

page 937

page 939

page 939

page 939

page 940

page 940

page 940

page 943

NEW

LEDVANCE LED MR16

Housing	Glass	Ø	50 mm
Light Beam Angle	36 Degree	Rated Input Voltage	12 V/AC/DC
Life Time L70 / B50	15000 h	CRI (Ra)	80
Length	46 mm		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Power Consumption	EEI	Price
180288	Colourless	WW 3000 K	210 lm	2.1 W	3 kWh/1000h	F	**€ 9.95**
180258	Colourless	WW 3000 K	345 lm	3.8 W	4 kWh/1000h	F	**€ 9.95**
180183	Colourless	NW 4000 K	230 lm	2.6 W	3 kWh/1000h	G	**€ 9.95**
180259	Colourless	NW 4000 K	345 lm	3.8 W	4 kWh/1000h	F	**€ 9.95**

MR16 GU5,3 | CV | IP20 | 1 CH | III

NEW Ra>90

LEDVANCE LED MR16 DIMMABLE

Housing	Glass	Rated Input Voltage	12 V/AC/DC
Light Beam Angle	36 Degree	CRI (Ra)	90
Life Time L70 / B50	25000 h	Control	Dimmable via optional power supply unit
Length	44 mm		
Ø	50 mm		

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Power Consumption	EEI	Price
180263	Colourless	WW 3000 K	230 lm	3.4 W	4 kWh/1000h	G	**€ 13.95**
180255	Colourless	WW 3000 K	345 lm	5.0 W	5 kWh/1000h	G	**€ 14.95**
180289	Colourless	WW 3000 K	621 lm	6.8 W	7 kWh/1000h	F	**€ 19.95**
180264	Colourless	NW 4000 K	230 lm	3.4 W	4 kWh/1000h	G	**€ 13.95**
180265	Colourless	NW 4000 K	345 lm	5.0 W	5 kWh/1000h	G	**€ 14.95**

MR16 GU5,3 | CV | IP20 | 1 CH | III

LEDVANCE LED P PIN G9

Housing	Plastic	Life Time L70 / B50	15000 h
Colour Temperature	2700 K	Rated Input Voltage	220-240 V/AC
Light Beam Angle	300 Degree	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Power	Power Consumption	Height	Ø	EEI	Price
180295	Colourless	WW	200 lm	1.9 W	2 kWh/1000h	43 mm	14 mm	F	**€ 7.95**
180287	Colourless	WW	320 lm	2.6 W	3 kWh/1000h	43 mm	14 mm	E	**€ 9.95**
180286	Colourless	WW	470 lm	4.2 W	5 kWh/1000h	49 mm	18 mm	E	**€ 12.95**

G9 | CV | IP20 | 1 CH

Technical data sheet
New in the onlineshop: The technical data sheets offer even more information:
Light and energy data, light distribution curves, dimensional drawings and more.

LEDVANCE LED GU10

Housing	Glass	Life Time L70 / B50	15000 h
Colour Temperature	2700 K	Length	54 mm
Luminous Flux	350 lm	Ø	50 mm
Power	4.3 W	Rated Input Voltage	220-240 V/AC
Light Beam Angle	36 Degree	CRI (Ra)	80
Power Consumption	5 kWh/1000h		

Article	Housing Color		Price
180275	Silver	WW	**€ 6.95**

GU10 | CV | IP20 | 1 CH | A ↑ G F

Ra>90

PHILIPS MASTER VALUE LED GU10 DIMMABLE

Housing	Glass	Rated Input Voltage	220-240 V/AC
Life Time L70 / B50	25000 h	CRI (Ra)	90
Length	54 mm	Control	Trailing-edge dimmer
Ø	50 mm	Channels	1

Article	Housing Color		Colour Temperature	Luminous Flux	Power	Light Beam Angle	Power Consumption	Price
180209	Silver	WW	2700 K	270 lm	3.7 W	36 Degree	4 kWh/1000h	**€ 13.95**
180208	Silver	WW	2700 K	355 lm	4.8 W	36 Degree	5 kWh/1000h	**€ 14.95**
180049	Silver	WW	2700 K	355 lm	4.9 W	60 Degree	5 kWh/1000h	**€ 14.95**
180099	Silver	WW	3000 K	365 lm	4.9 W	36 Degree	5 kWh/1000h	**€ 14.95**
180050	Silver	WW	3000 K	365 lm	4.9 W	60 Degree	5 kWh/1000h	**€ 14.95**
180139	Silver	WW	3000 K	575 lm	6.2 W	36 Degree	7 kWh/1000h	**€ 20.95**
180053	Silver	NW	4000 K	380 lm	4.9 W	36 Degree	5 kWh/1000h	**€ 14.95**
180051	Silver	NW	4000 K	380 lm	4.9 W	60 Degree	5 kWh/1000h	**€ 14.95**
180149	Silver	NW	4000 K	575 lm	6.2 W	36 Degree	7 kWh/1000h	**€ 20.95**

GU10 | IP20 | 1 CH | A ↑ G F

NEW Ra>90 SDCM<5

OSRAM PARATHOM LED GU10 DIMMABLE

Housing	Glass	Length	52 mm
Colour Temperature	2700 K	Ø	50 mm
Luminous Flux	575 lm	Rated Input Voltage	220-240 V/AC
Power	7 W	CRI (Ra)	90
Light Beam Angle	60 Degree	Control	Trailing-edge dimmer
Power Consumption	7 kWh/1000h	Channels	1
Life Time L70 / B50	25000 h		

Article	Housing Color		Price
180285	Silver	WW	**€ 14.95**

GU10 | IP20 | 1 CH | A ↑ G F

Lighting design
Interested in our lighting design service?
Your contact person will be happy to answer any questions you may have.

DEKO-LIGHT RF-SMART LAMP GU10 RGB+CCT WITH RF-ZIGBEE-CONTROL

- **brightness and color saturation dimmable**
- **16 million colors and color temperature adjustable**
- **18 automatic programs pre-installed**
- **program and remote control synchronization when operating several RF-smart components [repeater function]**
- **controllable with RF-smart radio remote controls [2.4 GHz, range approx. 30 m, not included in scope of delivery]**
- **controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]**

Housing	Plastic	Length	57 mm
Colour Temperature	2700-6500 K	Ø	50 mm
Luminous Flux	300 lm	Rated Input Voltage	100-240 V/AC
Power	4 W	CRI (Ra)	80
Light Beam Angle	25 Degree	Control	RF-Smart, ZigBee 3.0
Power Consumption	4 kWh/1000h	Channels	5
Life Time L70 / B50	50000 h		

Article	Housing Color	Colour Temperature	Price
843532	White	RGB WW CW 2700-6500 K	**€ 46.95**

GU10 | IP20 | 5 CH | A ↑ G F

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single	**€ 49.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT	**€ 49.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 38.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 59.95**

Ra>90

PHILIPS MAS VLE E27 ST64 DIMMABLE

Housing	Glass	Rated Input Voltage	220-240 V/AC
Light Beam Angle	330 Degree	Control	Trailing-edge dimmer
Life Time L70 / B50	15000 h	Channels	1

Article	Housing Color	Colour Temperature	Luminous Flux	Power	Height	Ø	EEI	Price
180359	Gold	WW 1800 K	250 lm	4.0 W	143 mm	65 mm		**€ 39.95**
180360	Colourless	WW 2700 K	806 lm	5.9 W	140 mm	64 mm	A G D	**€ 21.95**

E27 | IP20 | 1 CH

Ra>90

PHILIPS COREPRO LEDBULB E27 A60 DIMMABLE

Housing	Glass	Power Consumption	4 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	470 lm	Rated Input Voltage	220-240 V/AC
Power	3.4 W	CRI (Ra)	90
Light Beam Angle	150 Degree	Control	Trailing-edge dimmer
Length	104 mm	Channels	1
Ø	60 mm		

Article	Housing Color		Price
180214	White	WW	**€ 12.95**

E27 | IP20 | 1 CH | A G D

LEDVANCE LED RETROFIT E27 A60 DIMMABLE

Housing	Glass	Power Consumption	7 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	805 lm	Rated Input Voltage	220-240 V/AC
Power	7 W	CRI (Ra)	80
Light Beam Angle	320 Degree	Control	Trailing-edge dimmer
Length	105 mm	Channels	1

Article	Housing Color		Price
180253	Colourless	WW	**€ 8.95**

E27 | IP20 | 1 CH | A G E

LEDVANCE LED CLASSIC E27 A75 DIMMABLE

Housing	Glass	Power Consumption	8 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	1055 lm	Rated Input Voltage	220-240 V/AC
Power	7.5 W	CRI (Ra)	80
Light Beam Angle	360 Degree	Control	Trailing-edge dimmer
Height	105 mm	Channels	1
Ø	60 mm		

Article	Housing Color		Price
180277	Colourless	WW	**€ 12.95**



LEDVANCE LED CLA150 E27 DIMMABLE

Housing	Glass	Power Consumption	18 kWh/1000h
Colour Temperature	2700 K	Life Time L70 / B50	15000 h
Luminous Flux	2452 lm	Rated Input Voltage	220-240 V/AC
Power	18 W	CRI (Ra)	80
Light Beam Angle	330 Degree	Control	Trailing-edge dimmer
Height	141 mm	Channels	1
Ø	70 mm		

Article	Housing Color		Price
180361	White	WW	**€ 27.95**



PHILIPS MASTER LEDSPOT E27 PAR 30 DIMMABLE

Housing	Glass	Life Time L70 / B50	25000 h
Power	9.5 W	Rated Input Voltage	220-240 V/AC
Light Beam Angle	25 Degree	CRI (Ra)	90
Length	86 mm	Control	Trailing-edge dimmer
Power Consumption	10 kWh/1000h	Channels	1

Article	Colour Temperature		Luminous Flux	Ø	Price
180278	3000 K	WW	760 lm	95 mm	**€ 42.95**
180249	4000 K	NW	820 lm	96 mm	**€ 42.95**



DEKO-LIGHT RF SMART LAMP E27 A60 RGB+CCT RF-ZIGBEE-CONTROLLABLE

- **Brightness and color saturation dimmable**
- **16 million colors and color temperature adjustable**
- **18 automatic programs pre-installed**
- **Program and remote control synchronization when operating several RF-smart components [repeater function]**
- **controllable with RF-smart radio remote controls [2.4 GHz, range approx. 30 m, not included in scope of delivery]**
- **controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]**

Housing	Plastic	Power Consumption	6 kWh/1000h
Luminous Flux	550 lm	Life Time L70 / B50	50000 h
Power	6 W	Rated Input Voltage	100-240 V/AC
Light Beam Angle	220 Degree	CRI (Ra)	80
Length	100 mm	Control	RF-Smart, ZigBee 3.0
Ø	57 mm	Channels	5

Article	Housing Color	Colour Temperature	Price
843533	☐ White	RGB WW CW 2700-6500 K	**€ 46.95**

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single	**€ 49.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT	**€ 49.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 38.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 59.95**

DEKO-LIGHT RF-SMART LAMP E27 MAX RGB+CCT WITH RF-ZIGBEE-CONTROL

- **brightness and color saturation dimmable**
- **16 million colors and color temperature adjustable**
- **18 automatic programs pre-installed**
- **program and remote control synchronization when operating several RF-smart components [repeater function]**
- **controllable with RF-smart radio remote controls [2.4 GHz, range approx. 30 m, not included in scope of delivery]**
- **controllable with all Zigbee 3.0 compatible controllers / apps such as Amazon Echo [Alexa], Google Assistant, Tuya [corresponding gateway required, outdoor range up to 100 m]**

Housing	Plastic	Power Consumption	12 kWh/1000h
Luminous Flux	1100 lm	Life Time L70 / B50	50000 h
Power	12 W	Rated Input Voltage	100-240 V/AC
Light Beam Angle	220 Degree	CRI (Ra)	80
Length	147 mm	Control	RF-Smart, ZigBee 3.0
Ø	70 mm	Channels	5

Article	Housing Color	Colour Temperature	Price
843534	White	RGB WW CW 2700-6500 K	**€ 64.95**

Accessories

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	**€ 38.95**
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 69.95**
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 109.95**
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	**€ 74.95**
843523	RF-smart, Standard Remote, black, 3 zones, Single	**€ 49.95**
843524	RF-smart, Standard Remote, black, 3 zones, Single/CCT	**€ 49.95**
843525	RF-smart, Standard Remote, black, 3 zones, Single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	**€ 49.95**
843527	RF-smart, PIR motion detector, white, 120deg/7m, 3V	**€ 38.95**
843529	RF-smart, DMX-Gateway, 5V DC, 16 Zonen Single/CCT/RGB/W+CCT	**€ 59.95**

ISOLED LED GX53

Housing	Aluminium	Height	28 mm
Power	6 W	Ø	75 mm
Light Beam Angle	120 Degree	Rated Input Voltage	220-240 V/AC
Power Consumption	6 kWh/1000h	CRI (Ra)	80
Life Time L70 / B50	25000 h		

Article	Housing Color	Colour Temperature	Luminous Flux	Price
180196	☐ White	WW 3000 K	500 lm	**€ 21.95**
180195	☐ White	NW 4000 K	525 lm	**€ 21.95**



Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

KEUR
CE
M686 IP68 max debth 6m
MIN 2x2.5
MAX 3x4.5
24A 450VAC
The screws of cover are tightened
with 3Nm torque in IP test

ACCESSOERIES

948 indoor

951 outdoor

959 chemical products

□ page 948

■ page 949

■ page 950

□ page 950

■ page 951

■ ■ page 951

page 951

■ page 957

■ page 958

page 959

accessoeries



SAFETY SPACER

- **For safe installation of downlights in ceilings with insulating material**
- **Creates the necessary clearance around the light to enable better air circulation**
- **Observe the installation requirements of the specific light.**
- **For ceiling installation rings from dia. 62 to 90 mm**

Housing	Plastic	Ø	62 mm
Height	80 mm		

Article	Housing Color	Price
829063	Black	**€ 3.95**

SOCKET GU5,3

- **Heat-resistant connecting cable**
- **Ceramic fitting**

Housing	Ceramic	Secondary Connection End	Open cables
Rated Input Voltage	12 V/AC/DC	Connection Type	Open cables
Power	35 W		

Article	Housing Color	Length	Secondary Cable Length	Price
100200	White	150 mm	0.15 m	**€ 0.95**
100250	White	500 mm	0.5 m	**€ 1.65**

CV III

SOCKET GU10 (PROTECTION CLASS II)

Housing	Ceramic	Primary Cable Length	15 cm
Length	150 mm	Primary Connection End	With free strand / conductor ends
Rated Input Voltage	220-240 V/AC		
Power	35 W		

Article	Housing Color	Price
100202	White	**€ 1.95**

IP20 GU10

SOCKET GU10 (SAFETY CLASS I)

- **With spacer and connection box**
- **Separate connection for protective conductors**
- **When using installation rings, VDE regulations require a screw connection between the spacer and installation ring**

Housing	Ceramic	Power	35 W
Length	100 mm	Primary Cable Length	10 cm
Rated Input Voltage	220-240 V/AC	Primary Connection End	Screw terminal

Article	Housing Color	Price
100204	White	**€ 3.95**

IP20 | GU10

DEKO-LIGHT QUICK CONNECTION BOX 2-WAY 230 V

- **Fast through-wiring of power supplies or lamps**
- **3-pin quick terminal for cables from 0.5 to 1.5 mm²**
- **15 cm pre-installed 3-pin cable for connecting SKI/SKII power supply units/lamps**
- **Quick-action closure secured with additional screw**
- **For inserting into ceilings with a round cut-out from 68 mm and a 25 mm ceiling cavity**

Housing	Plastic	Rated Input Voltage	220-240 V/AC
Length	80 mm	Rated Current	16 A
Width	40 mm	Primary Connection End	Connection box IP20
Height	25 mm	Secondary Connection End	Open cables

Article	Housing Color	Price
930694	Black	**€ 5.95**

IP20

TRIAC-DIMMER TRAILING EDGE

Suitable for dimming:

- **R loads (incandescent bulb) 10-350 W**
- **C loads (electrical ballasts) 10-350 W**
- **Max. five ballasts**
- **Adjustable minimum load/brightness**
- **Perfectly matched to DEKO-LIGHT power supply units**
- **Suitable for 68 mm flush-mounted/cavity wall sockets**

Housing	Plastic	Power	355 W
Length	83.5 mm	Control	Trailing-edge dimmer
Width	83.5 mm	Rated Current	1.6 A
Height	43.5 mm	Connection Type	Clamp
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Price
930060	White	**€ 66.95**

IP20 | 1 CH

IP67

OVERVOLTAGE PROTECTION WITH CONTROL DISPLAY

- **Compact protection of lights in the event of problems with the mains supply**
- **Prevents premature failure**
- **In the event of a fault, the overvoltage protection trips, protecting the light by disconnecting it from the mains supply**
- **Control LED to indicate the operating status**
- **Suitable for single-phase, non-dimmable lights**
- **With mounting bracket for installation in light fittings or junction boxes**

Housing	Plastic	Rated Current	10 A
Length	37 mm	Primary Connection End	With free strand / conductor ends
Width	30 mm	Secondary Connection End	Open cables
Height	20 mm	Connection Type	Open cables
Rated Input Voltage	230-277 V/AC		

Article	Housing Color	Price
843055	Black	**€ 19.95**

IP67

GROUND SPIKE WITH THREADED BUSHING

- **Robust design**
- **For anchoring surface-mounted spotlights in soil**

Article	Housing Color	Housing	Thread	Length	Ø	Price
930426	Dark grey	Aluminium	M5	170 mm	33 mm	**€ 9.95**
700230	Black	Plastic	M5	210 mm	50 mm	**€ 4.95**
700229	Black	Plastic	M6	160 mm	43 mm	**€ 4.95**
730349	Black	Plastic	M6	210 mm	45 mm	**€ 6.95**
930427	Dark grey	Aluminium	M10	219 mm	43.8 mm	**€ 11.95**

WALL BRACKET/DISPLAY ARM

- **Robust housing**
- **Load capacity: max. 4.5 kg**
- **Ideal for illuminating advertising boards on façades**
- **Accessories for façade lighting**
- **Supplied without installation materials due to wide range of possible applications**

Housing	Metal	Width	150 mm
Length	800 mm	Height	100 mm

Article	Housing Color	Price
930659	Black	**€ 59.95**

IP67

WEIPU HQ SOCKET / PLUG | 2-PIN

Housing	Plastic	Rated Current	8.5 A
Rated Input Voltage	12-48 V/DC		

Article	Connection Type	Price
940058	WEIPU socket 2-pole	**€ 13.95**
940059	WEIPU socket 2-pole	**€ 13.95**
940060	WEIPU plug 2-pole	**€ 13.95**

CV | IP67 | III

IP67

WEIPU HQ SOCKET / PLUG | 4-PIN

Housing	Plastic	Rated Current	8.5 A
Rated Input Voltage	12-48 V/DC		

Article	Connection Type	Price
940062	WEIPU plug 4-pole	**€ 14.95**
940061	WEIPU socket 4-pole	**€ 14.95**
940063	WEIPU socket 4-pole	**€ 14.95**

CV | IP67 | III

IP67

WEIPU HQ SOCKET / PLUG | 5-PIN

Housing	Plastic	Rated Input Voltage	12-48 V/DC
Length	65 mm	Rated Current	8.5 A
Height	25 mm		

Article	Connection Type	Price
940056	WEIPU socket 5-pole	**€ 15.95**
940057	WEIPU plug 5-pole	**€ 15.95**

CV | IP67 | III

IP67

WEIPU HQ FEEDER CABLE | SOCKET 2-PIN

Housing	Plastic	Rated Current	8.5 A
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU socket 2-pole

Article	Length	Price
940037	1000 mm	**€ 22.95**
940038	3000 mm	**€ 29.95**
940039	5000 mm	**€ 37.95**

CV | IP67 | III

IP67

WEIPU HQ FEEDER CABLE | SOCKET 4-PIN

Housing	Plastic	Rated Current	8.5 A
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU socket 4-pole

Article	Length	Price
940033	1000 mm	**€ 27.95**
940034	3000 mm	**€ 42.95**
940035	5000 mm	**€ 55.95**

CV | IP67 | III

IP67

WEIPU HQ FEEDER CABLE | SOCKET | 5-PIN

Housing	Plastic	Rated Current	8.5 A
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU socket 5-pole

Article	Length	Price
940029	1000 mm	**€ 31.95**
940030	3000 mm	**€ 47.95**
940031	5000 mm	**€ 59.95**

CV | IP67 | III

IP67

WEIPU HQ CONNECTION CABLE | 2-PIN

Housing	Plastic	Secondary Connection End	WEIPU socket 2-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 2-pole
Rated Current	8.5 A		

Article	Length	Price
940049	1000 mm	**€ 34.95**
940050	3000 mm	**€ 42.95**
940051	5000 mm	**€ 49.95**

CV | IP67 | III

WEIPU HQ CONNECTION CABLE | 4-PIN

Housing	Plastic	Secondary Connection End	WEIPU socket 4-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 4-pole
Rated Current	8.5 A		

Article	Length	Price
940045	1000 mm	**€ 42.95**
940046	3000 mm	**€ 56.95**
940047	5000 mm	**€ 68.95**

CV | IP67 | III

WEIPU HQ CONNECTION CABLE | 5-PIN

Housing	Plastic	Secondary Connection End	WEIPU socket 5-pole
Rated Input Voltage	12-48 V/DC	Connection Type	WEIPU plug 5-pole
Rated Current	8.5 A		

Article	Length	Price
940041	1000 mm	**€ 47.95**
940042	3000 mm	**€ 60.95**
940043	5000 mm	**€ 72.95**

CV | IP67 | III

WEIPU DISTRIBUTOR BOX

- **for wiring 12V/24V/48V DC outdoor components**
- **reverse polarity protected**
- **Robust design**
- **2 socket outlets**

Housing	Plastic	Height	38 mm
Length	57 mm	Rated Input Voltage	12-48 V/DC
Width	57 mm	Rated Current	8.5 A

Article	Secondary Connection End	Connection Type	Price
730300	WEIPU socket 2-pole	WEIPU plug 2-pole	**€ 64.95**
730301	WEIPU socket 4-pole	WEIPU plug 4-pole	**€ 68.95**
940010	WEIPU socket 5-pole	WEIPU plug 5-pole	**€ 78.95**

CV | IP67 | III

IP68

MULTI OUTDOOR CABLE CONNECTOR | CONNECTION SLEEVE

- **Watertight M25 cable glands**
- **For two cables measuring 4-14 mm**
- **For two to five wires measuring 0.5-4 mm²**
- **Adapter sleeves included in scope of delivery**

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	112.53 mm	Rated Input Voltage	12-450 V/AC
Width	29.5 mm	Rated Current	24 A

Article	Housing Color	Price
930571	Black, Yellow	**€ 9.95**

IP68
max.2m

IP68

MULTI OUTDOOR Y-SHAPED CABLE CONNECTOR | CONNECTION SLEEVE

- **Waterproof M25 cable glands**
- **For three cables measuring 4-14 mm (adapter sleeves included in the scope of delivery)**
- **For two to three wires measuring 0.5-4 mm²**

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	139.71 mm	Rated Input Voltage	12-450 V/AC
Width	71.88 mm	Rated Current	24 A

Article	Housing Color	Price
930573	Black, Yellow	**€ 10.95**

IP68
max.2m

IP66

MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- **For wiring low-voltage and 230 V outdoor components**
- **Robust housing**
- **For wires measuring 0.5-2.5 mm²**
- **For two cables measuring 5-12 mm**
- **Versatile thanks to the adapter sleeves included in the scope of delivery**
- **Watertight M20 cable glands**
- **Cover: Quick-action coupling (screwless)**

Housing	PA 6.6 - Polyamide 6.6	Rated Input Voltage	12-450 V/AC
Height	46.31 mm	Rated Current	24 A
Ø	65.33 mm		

Article	Housing Color	Price
930578	Black	**€ 6.95**

IP66

IP68

MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- **Watertight M20 cable glands**
- **For two cables measuring 5-12 mm**
- **Adapter sleeves included in scope of delivery**
- **For wires measuring 0.5-2.5 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	42 mm
Length	125 mm	Rated Input Voltage	12-450 V/AC
Width	70 mm	Rated Current	24 A

Article	Housing Color	Price
930712	Black	**€ 9.95**

IP68
max.2m

MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- **Watertight M25 cable glands**
- **For two to four cables measuring 4-14 mm**
- **Adapter sleeves and two blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4.0 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930575	Black	**€ 11.95**

IP68
max.2m

MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- **Watertight M25 cable glands**
- **For two to four cables measuring 4-14 mm**
- **Adapter sleeves and two blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4.0 mm²**
- **Screwed cover (screws included in scope of delivery)**

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930735	Black	**€ 19.95**

IP68
max.2m

MULTI OUTDOOR CABLE DISTRIBUTOR TEN-WAY

- **Watertight M25 cable glands**
- **For two to ten cables measuring 4-14 mm**
- **Adapter sleeves and eight blanking plugs included in scope of delivery**
- **For wires measuring 0.5-4 mm²**
- **Screwed cover (screws included in scope of delivery)**
- **For wiring low-voltage and 230 V outdoor components**
- **Versatile thanks to the adapter sleeves included in the scope of delivery**

Housing	PA 6.6 - Polyamide 6.6	Height	49.1 mm
Length	182.95 mm	Rated Input Voltage	12-450 V/AC
Width	135.3 mm	Rated Current	24 A

Article	Housing Color	Price
930574	Black	**€ 39.95**

IP68
max.2m

Onlineshop
You can find more information about the products in the onlineshop:
Detailed images, videos, project reports, LDT files, EPREL data sheets and more.

GEL ADHESIVE FOR BONDING END CAPS

- **Cyanoacrylate instant adhesive**
- **3 g tube**
- **Strong initial bond**
- **Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, zinc-plated steel, aluminium, plastics (e.g. ABS, GFRP, hard PC) and ceramic materials**
- **Curing time: 8-12 hours**
- **Observe the safety and application instructions**

Article	Price
930593	**€ 5.95**

ASSEMBLY ADHESIVE

- **Bond+Seal Power**
- **310 ml cartridge**
- **Heavy-duty, elastic 1-component structural adhesive**
- **Excellent adhesion to almost all surfaces, such as metals, steel, stainless steel, galvanised steel, aluminium, plastics (e.g. ABS, GFRP, hard PVC) or ceramic materials**
- **UV-resistant**
- **Approved for use with foodstuffs according to NSF (NSF, P1 registered: 136996)**
- **High degree of initial strength**
- **Can be painted over with all commercially available paint systems (except alkyd resin paints)**

Article	Price
930105	**€ 35.95**

NATURAL STONE SEALANT

- **310 ml cartridge**
- **Suitable for bonding profile covers and for use in wet rooms**
- **Does not attack the surface of LEDs/strips**
- **Permanently elastic**
- **Highly resistant to weathering, UV and ageing and excellent colour fastness**
- **Ideal for high loads outdoors**

Article	Price
930104	**€ 39.95**

ELECTRIC CHARACTERISTICS

CV — constant voltage

CC — constant current

SELV — safety extra-long voltage

flicker free

solar panel

USB charging socket

battery operation

LAMP

E14 — base of lamp

FUNCTIONALITY

swivel-mounted +
rotatable and swivel-mounted + rotatable

 radiation direction

SURFACE

NANO coating IP XX [see product description]
lotus effect: Water rolls off and takes all dirty surface particles with it.

surface paintable /
individual design

CONTROL

movement sensor [IR / HF]

presence detector

DMX — DMX control

dimmable

1 CH | 4-6 CH — number of channels

EL — emergency power supply

SAFETY

IP65 — IP protection class

walkable

passable

safety lamp control gear

components may be installed on fixtures of materials, the fire behavior of which is not always known.

max. surface temperature of lamp control gear

lights with limited surface temperature

protection class I

protection class II
[protective isolation]

protection class III
[protective low voltage]

LIGHT COLOURS / CHANNELS
Depending on the LED equipment, different colours can be mixed with the luminaire via the individual RGB / RGBW channels.

SELECTABLE LIGHT COLOUR
Luminaires with this function allow the light colour to be adjusted and therefore offer a wide range of applications.

HCL
HCL stands for "Human Centric Lighting" and means the tuning of artificial light indoors to natural daylight and the human biorhythm.

DIM TO WARM
The dim-to-warm function automatically adjusts the light colour when a luminaire is dimmed. The rule is: the lower the luminous intensity, the warmer the light colour.

COLOUR RENDERING INDEX RA
The colour rendering index Ra describes the measure of the correspondence of the perceived light colour between an existing lighting situation and a reference light source. The higher the Ra value, the better/natural the colour rendering.

COLOUR CONSISTENCY SDCM
The SDCM value describes the standard deviation of an LED from the target colour location and is a measure of production-related colour differences between LEDs with identical values. The higher the value, the greater the colour deviation. The maximum valid deviation is 6 SDCM.

UGR
The UGR value indicates how glare-free a luminaire is, thus avoiding disturbing reflections. The lower the UGR value, the more glare-free a luminaire emits its light. Luminaires with a UGR value < 19 are suitable for office environments and workplaces.

POWER SWITCH
Luminaires with an integrated power switch can be switched in wattage and operated in several power levels. The power reduction enables flexible adjustment of the light intensity and is usually carried out via a dip switch on the unit.

PHASE SWITCH
The required phase conductor phase [L1, L2 or L3] can be selected manually using the integrated phase switch. This enables flexible installation and even load distribution in the network - particularly useful for multi-phase lighting systems or in commercial applications with multiple circuits.

TOOL-FREE INSTALLATION
These luminaires are delivered with pre-assembled components and can be mounted without additional tools. This saves time during installation and enables particularly simple and efficient conversion in the event of renovation or refurbishment.

CORRIDOR FUNCTION
With the DALI corridor function [Corridor Dim], the lighting is lowered to a predefined dimming level when no one is present and automatically raised when motion is detected.

CONTROLLABLE VIA ...
The luminaire can be controlled via one of the following lighting control systems: RF smart [the new control system from DEKO-LIGHT for up to eight light zones], zigbee, DALI, RF [Radio Frequency], Bluetooth, WiFi.

BEG ELIGIBLE
Eligible luminaires under the BEG programme [Federal funding for efficient buildings] have a system luminous efficacy of at least 120 lm/W [140 lm/W for LED strips] and a service life of 50,000 hours at L80 [80 % luminosity].

SUITABLE FOR VDU WORKSTATIONS
These luminaires meet the requirements of DIN standard EN 12464-1 according to the lighting of indoor workplaces. With a luminance value of L65 < 3000 cd/m2 , the luminaires are standard-compliant for glare-free VDU workstations.

PASSABLE
Drive-on recessed luminaires are generally used outdoors and can withstand particularly high pressure loads from pedestrians, vehicles and other objects. Drive-in luminaires have an IP protection of at least IP67.

FSC CERTIFIED
FSC® ["Forest Stewardship Council®"] is an international certification system. Luminaires with FSC® certification use only wood from sustainable forestry.

THROUGH-WIRING POSSIBLE
This luminaire enables through-wiring and can be connected in series with other luminaires. The advantage: luminaires with through-wiring require only one power connection, eliminating the need for costly laying of additional cables.

LIGHT CAN BE SWITCHED SEPARATELY
Separate connection phases allow the light to be switched independently of the socket.

IP PROTECTION
The IP protection class indicates the protection of live parts against the ingress of foreign bodies and contact [first digit] and against water [second digit] with two digits. The following applies: The higher the respective digit, the higher the protection.

SEAWATER RESISTANT
These lights have been developed for use in coastal regions and can withstand the increased salt and moisture in the environment – ideal for outdoor areas near the sea.

IK IMPACT RESISTANCE
The IK value [or IK impact resistance level] indicates how shock and impact resistant a luminaire or certain components of the luminaire are. The following applies: The higher the IK value [IK00 to IK10+], the greater the protection against external mechanical stress.

MIX'N MATCH
The modular system consists of a base, cylinder housing and reflector ring. These components can be combined individually - for a luminaire to suit your taste.

NIGHTSAVER
The downward-directed light reduces scattered light and provides targeted protection against light pollution.

LIGHT COLOUR SELECTABLE

Luminaires with the designation "CCT Dip" allow you to change the light colour via a small dip switch [usually in the steps 3000K / 4000K / 5000K]. With their high application flexibility, CCT Dip luminaires offer customers who are still unsure about the light colour an enormous decision-making aid - and incidentally reduce your stock requirements.

The colour temperature [light colour] is specified in Kelvin [K] and determines how the respective light is perceived.

WW = warm white light	2.300 K to 3.300 K [high red component]
NW = neutral white light	3.300 K to 5.300 K
CW = cool white / daylight white light	5.300 K to 8.000 K [high blue content]

The following guide values apply as orientation for different rooms following guide values apply:

living and sleeping are	WW
kitchen and bathroom	WW | NW
offices	NW
industry	NW | CW
photo studio / architectural lighting	CW

HCL

HCL stands for "Human Centric Lighting" and means the simulation of lighting situations according to the biological day-night rhythm of humans. HCL matches artificial light indoors to natural daylight and promotes well-being, mood and health. Numerous DEKO-LIGHT luminaires can already be integrated into an HCL control system to adjust the light colours to the biorhythm. In addition, several LED stripes in different light colours can be combined in one profile and thus integrated into the HCL lighting design.

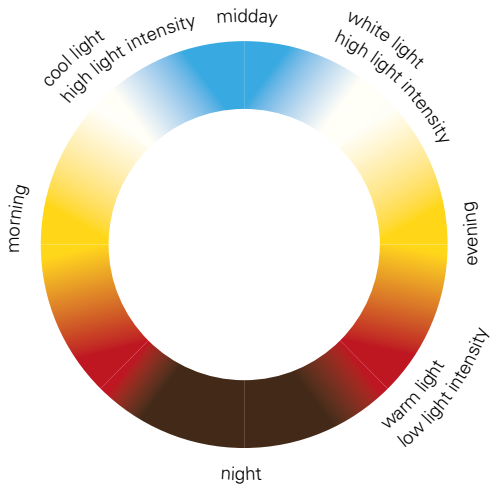

DIM TO WARM

With the dim-to-warm function, you not only adjust the luminous intensity downwards, but by simultaneously changing the light colour [e.g. from 3000 to 2000 K], you obtain a room mood adapted to the new situation. LED luminaires with dim-to-warm technology can therefore be used particularly flexibly.

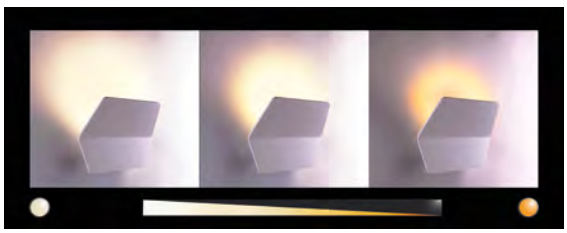

DALI DIMMABLE

Luminaires that can be dimmed via DALI can be perfectly integrated into lighting/property management systems. The great advantage lies in the wiring: via DALI, all luminaires in a line can be individually addressed and controlled. But this variant is also suitable for individual luminaires: DALI dimmers without an address exist for this purpose, which address the power supply unit directly. The good news: most systems on the market already have DALI interfaces.

COLOUR RENDERING INDEX RA

The colour rendering index Ra is the measure of the correspondence of the perceived light colour between an existing lighting situation and a reference light source. The smaller the deviation, the better the colour rendition. A light source with Ra 100 reproduces all colours exactly. The lower the Ra value, the less precisely the colours are reproduced.

Standard values:	
Incandescent bulb, halogen lamps	up to Ra 100
LED lamps	Ra 75-95
Compact fluorescent and energy-saving lamps	Ra 80-89
Fluorescent lamps	Ra 70-85

RA 70-80 medium colour rendition

RA 80-90 good colour rendition

RA 90-100 very good colour rendition

IK VALUE

In addition to the IP protection class, you should also keep an eye on the IK value of a luminaire, which is increasingly required within the scope of tenders and for installations in public spaces. The IK value [or IK impact resistance level] indicates how impact-resistant a luminaire or certain components are. IK00 offers no protection against external mechanical stress, IK10 or IK10+ means that the luminaire can withstand a 5 or 10 kg test weight from a distance of 40 or 50 cm.

There are eleven codes, corresponding to the impact energy that a enclosure can withstand. [source: wikipedia.org]

Code	impact energy in joules	corresponds to drop height in mass
IK00	no protection	
IK01	0,14	7 cm - 200 g
IK02	0,20	8 cm - 250 g
IK03	0,35	14 cm - 250 g
IK04	0,50	20 cm - 250 g
IK05	0,70	28 cm - 250 g
IK06	1,0	40 cm - 250 g
IK07	2,0	40 cm - 500 g
IK08	5,0	25 cm - 2000 g
IK09	10,0	20 cm - 5000 g
IK10	20,0	40 cm - 5000 g
IK10+	50,0	50 cm - 10000 g

IP PROTECTION ZONES

ZONE 3 | IP23

Outside zones 0 to 2, no special IP protection is necessary, provided no cleaning with direct water irradiation takes place.

ZONE 2 | IP44

In the areas 60 cm from zone 1, IP X4 protection applies.

ZONE 1 | IP65

In the wall area of the shower as well as in the tile area exposed to IP X5 is specified for the wall area of the shower and in the tile area exposed to splash water [max. 50 V].

ZONE 0 | IP67

In bathtubs and shower trays, low-voltage [max. 12 V] is absolutely required. The minimum IP protection is IP X7 [protected against water penetration].

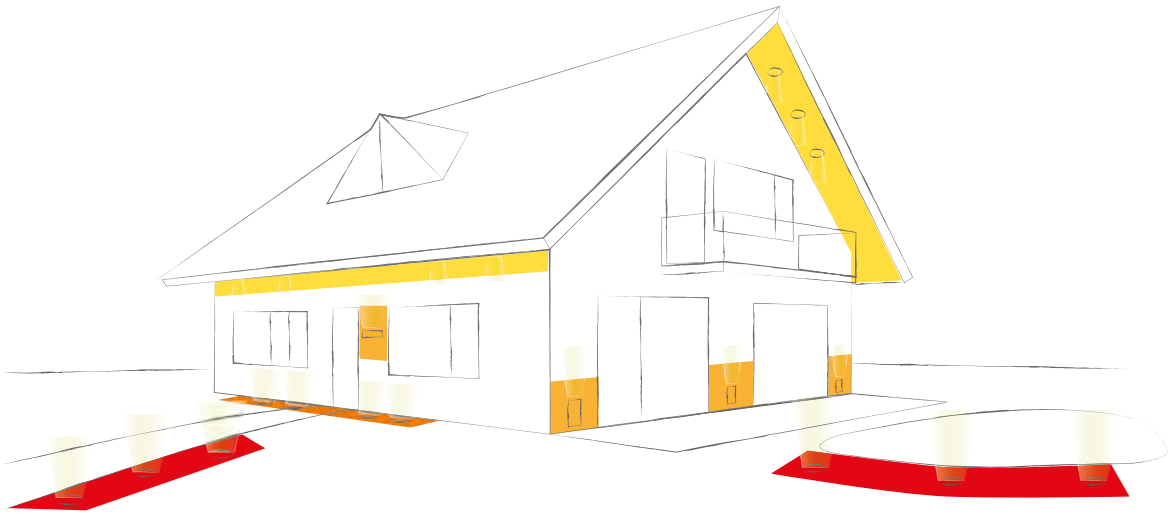

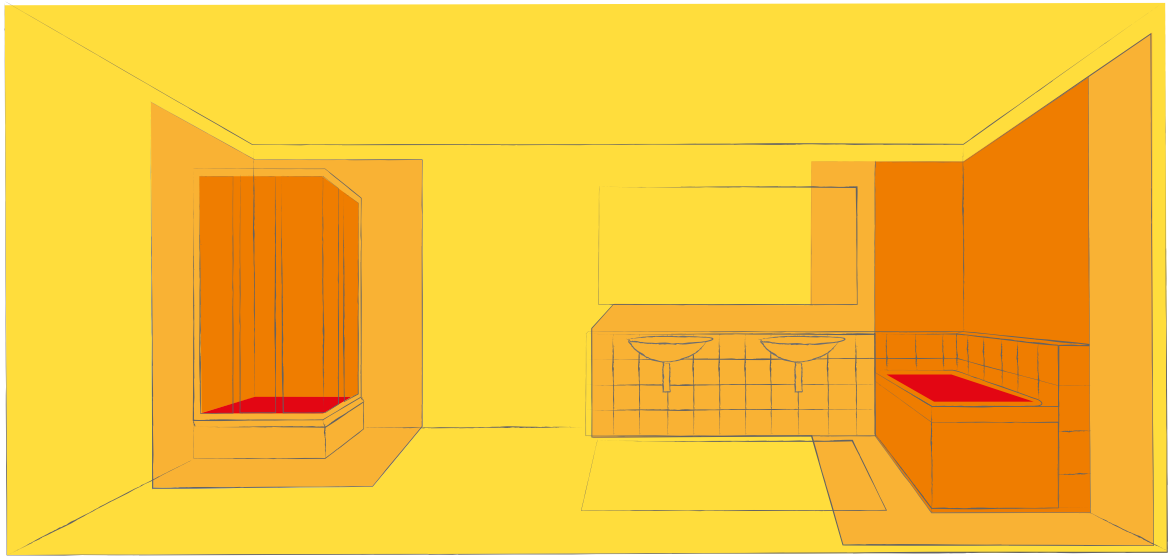

PROTECTION TYPES AND INSULATION CLASSES

Luminaires and other electrical appliances have a housing that protects live parts from contact, moisture or other environmental influences. This protection depends on the respective area of application. In order to have an overview of the suitable application, all devices are assigned to a classified protection type and an insulation class.

IP67

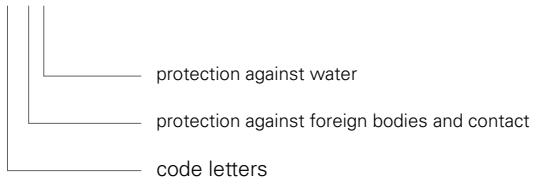

1. digit	protection against foreign bodies and contact
0	no protection
1	arge foreign bodies [Ø > 50 mm] large body parts [e.g. back of the hand]
2	medium-sized foreign bodies [Ø > 12 mm] finger
3	small foreign bodies [Ø > 2,5 mm] tools and wires [Ø > 2,5 mm]
4	granular foreign bodies [Ø > 1 mm] tools and wires [Ø > 1 mm]
5	dust deposit complete protection against accidental contact
6	dust entry complete protection against accidental contact

2. digit	protection against water
0	no protection
1	protection against vertically falling dripping water
2	protection against dripping water falling at an angle [up to 15°]
3	protection against water spray up to 60° from vertical
4	protection against splashing water on all sides
5	protection against jet water
6	protection against jet water
7	protection against temporary immersion
8	protection against permanent immersion

EVERYTHING IN VIEW

Optik Eberle, retail trade, conversion

design:
Optik Eberle
Marktstraße 24
75305 Neuenbürg
optik-eberle.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Andris Balodis

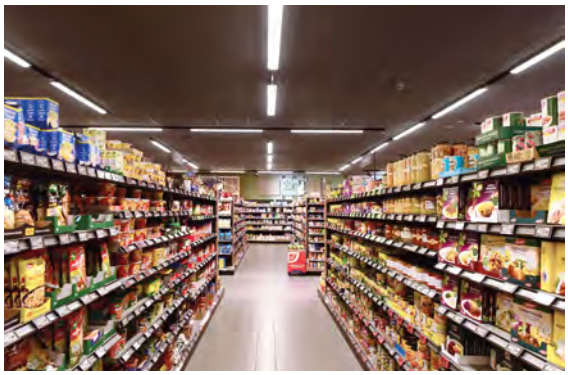

FLEXIBLE SHOPPING EXPERIENCE

EDEKA, retail trade, refurbishment

realisation:
meerLICHT
Lunser Dorfstraße 12
27321 Thedinghausen
meerlicht.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Andris Balodis

DRAWING WITH LIGHT

La Croix Architekten, office, new building

design and lighting design:
La Croix Architekten
Reitteilstraße 8
76297 Stutensee
lacroix-architekten.de

scope:
product delivery

photos:
Daniel Vieser . Architekturfotografie,Hildesheim/Karlsruhe

OFFICE AND BIORHYTHM

EMSR, office building, new building

design and realisation:
EMSR-Technik GmbH
Dieselstraße 32
61200 Wölfersheim
emsrtechnik.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Roman Schinzel

MODERN LOUNGE

Base One / Mohr Solutions, Ingenieure company building, conversion

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, product delivery

photo:
Alexander Cevolani

LINEAR AND TRANSPARENT

mars solutions, office- and event areas, core refurbishment

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, product delivery

photo:
Alexander Cevolani

MODERN THERAPY CENTRE

Physiotherapie Senger, practice rooms, refurbishment

design and realisation:
Elektro Huml GmbH
Egmatinger Straße 9
85635 Siegertsbrunn
elektro-huml.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Tanja Dörfner

MORE LIGHT AND QUALITY OF LIFE

Wilhelmshilfe e.V., nursing home, refurbishment

design and realisation:
OKTEC GmbH
Wiesenstraße 8/1
73054 Eislingen
ok-tec.de

lighting design:
lighting design Rottke
lichtplanung-rottke.de

scope:
consulting, lighting design, 3D visualisation, product delivery

photo:
Alexander Cevolani

MODERN LEARNING

Mühlbachschule, educational institution, refurbishment

design:
K+H | KILIAN + PARTNER
kh-architekten.de

realisation:
Endlichhofer Elektrotechnik
endlichhofer.de

lighting design:
Ingenieurbüro Markus Reuder
reuder.de

scope:
product delivery

photo:
Daniel Vieser . Architekturfotografie, Hildesheim/Karlsruhe

LIGHT FOR THE HIDDEN CHAMPION

WIBU-Systems, company, new building

design:
Architekturbüro archis
archis.de

project development:
IBA Immobilien
iba-heinze.de

project management:
mdbm
mdbm-baumanagement.de

general contractor:
Wolff+Müller
wolff-mueller.de

electrical installation:
Prinzing Elektrotechnik
prinzing-elektro.de

scope:
consulting, lighting design, product delivery

photos:
Andris Balodis

EVERY PLATE IN THE IDEAL LIGHT

Becks, restaurant, general refurbishment

design and realisation:
SH-Lichttechnik
Wörthstraße 74
72766 Reutlingen

lighting design:
Sven Hackius

scope:
consulting, product delivery

photo:
Andris Balodis

LIGHT IN THE ROCK

Mawell, hotel, new building

design:
KommInvest GmbH & Co. KG
komm-invest.de

realisation:
FARMBAU Fertigsysteme GmbH
farmbau.eu

lighting design:
Lichtdesign Gommel

scope:
consulting, product delivery

photo:
Andris Balodis

GARDEN DREAM IN BERLIN

private building, garden landscape, new building

design and realisation:
Gärten von Klein GmbH & Co. KG
Gut-Asselborn Nr. 1
51429 Bergisch Gladbach
gaertenvonklein.de

lighting design:
Günter Klein

scope:
consulting, product delivery

photo:
Grit Erlebach

LINEARES LICHT BIS IN DEN LETZTEN WINKEL

private building, linear light, new building

design and realisation:
BEST – Bellemann Elektro Service Team GmbH
Letzenbergstraße 37a
69231 Rauenberg-Malschenberg

lighting design:
Michael Berger
best-elektro.de

scope:
product delivery

0
000097 892
000099 892
000103 892
000104 892
000106 892
000107 892
000109 892
000140 893
000141 893
000142 893

1
100032 193
100078 192
100079 192
100084 185
100088 185
100089 185
100111 564
100114 564
100116 564
100122 185
100123 188
100124 189
100125 188
100133 566
100138 189
100139 188
100140 182
100141 182
100142 183
100143 182
100144 182
100145 183
100146 184
100147 184
100148 185
100149 182
100150 182
100151 184
100152 195
100153 195
100154 188
100156 195
100157 195
100158 190
100159 194
100160 194
100200 948
100202 948
100204 949
100250 948
110038 106
110039 106
110040 106
110041 106
110042 106
110043 106
110044 107
110045 107
110046 107
110047 107
110048 107
110049 107
110050 108
110051 108
110052 108
110053 108
110054 108
110055 108
110056 109
110057 109
110058 109
110059 109
110060 109
110061 109
122416 96
122417 96
180049 936
180050 936
180051 936
180053 936
180099 936
180139 936
180149 936
180183 934
180195 943
180196 943
180208 936
180209 936
180214 939
180249 940
180253 939
180255 934
180258 934
180259 934
180263 934
180264 934
180265 934
180275 936
180277 940
180278 940
180285 937
180286 935
180287 935
180288 934
180289 934
180295 935
180359 939
180360 939
180361 940
180512 883
180513 883
180514 883
180515 892
180529 892
180730 51
180731 51
180732 52
180733 52
180734 53
180735 53
180736 53
180737 53
180741 53
180742 53
180743 53

3
341183 200
341184 200
341194 198
341195 198
341196 198
341200 199
341201 199
341202 199
341203 199
341236 219
341237 219
341242 218
341243 218
341249 200
341250 200
341333 222
341334 222
341335 222
341336 222
341337 ..... 220, 223
341338 ..... 220, 223
341339 ..... 220, 223
341340 ..... 220, 223
341341 202
341342 202
341343 204
341344 204
341345 224
341346 224
341347 224
341348 224
341349 224
341350 224
341351 224
341352 224
342146 254
342147 254
342148 48
342150 48
342177 42
342178 42
342179 42
342180 42
342181 42
342182 42
342189 ..... 36, 40
342190 ..... 36, 40
342191 ..... 36, 40
342192 ..... 36, 40
342193 ..... 36, 40
342194 ..... 36, 40
342195 ..... 36, 40
342196 ..... 36, 40
342197 ..... 36, 40
342198 ..... 36, 40
342199 ..... 36, 40
342200 ..... 36, 40
342201 34
342202 34
342203 34
342204 34
342205 34
342206 34
342207 34
342208 34
342209 34
342210 34
342211 34
342212 34
342213 40
342214 40
342215 39
342216 39
342219 248
342220 248
342221 248
342228 264
342229 264
342230 264
342231 266
342232 266
342233 266
342237 40
342238 40
342239 39
342240 39
342241 40
342242 40
342243 44
342244 44
342245 44
342246 44
342247 45
342248 45
342251 246
342252 246
342253 246
342254 46
342255 46
342256 46
342257 46
343016 260
343022 258
343025 233
343026 233
343030 256
343032 257
343034 256
343035 257
343037 228
343038 228
343039 230
343040 230
346015 232
346016 232
346025 454
346026 234
346027 234
346028 234
346032 454
346033 454
346034 454
346035 454
346036 454
346037 454
346063 265
346064 265
346065 265
346066 267
346067 267
346068 267
346086 229
346087 229
346088 230
346089 230
348001 97
348002 97
348004 97
348005 97
348022 96
348023 96
348024 96
348025 96
348051 70
348052 70
348069 522
348070 522
348071 523
348072 523
348099 102
348107 76
348122 77
348123 78
348124 74
348125 75
348127 79
348128 102
348153 80
348154 80
348155 80
348156 80
348157 80
348158 80
348159 80
348160 80
348161 82
348162 82
348163 82
348164 82
348165 82
348166 82
348167 82
348168 82
348175 75
348176 79
348177 78
348178 77
348179 74
348180 62
348181 62

348182....62
348183....62
348184....62
348185....62
348186....60
348187....60
348188....60
348189....60
348190....60
348191....60
348192....60
348193....60
348194....60
348195....60
348196....60
348197....60
348198....58
348199....58
348200....58
348201....58
348202....58
348203....58
348204....58
348205....58
348206....58
348207....58
348208....58
348209....58
348210....76
348213....84
348214....84
348215....84
348216....84
348223....85
348224....85
348225....85
348226....85
348233....77
348234....77
348235....78
348236....78
348237....86
348238....86
348239....87
348240....87
348241....88
348242....88
348243....89
348244....89
348245....90, 93
348246....90, 93
348247....90, 93
348248....90, 93
348249....90, 93
348250....90, 93
348251....92
348252....92
348253....92
348254....92
348255....92
348256....92
348258....98
348259....98
348260....98
348261....101
348262....101
348263....101
348264....94
348265....94
348266....94
348267....94
348268....94
348269....94
348270....94
348271....94
348272....94
348273....94
348274....94
348275....94
348276....66
348277....66
348278....66
348279....68
348280....68
348281....68
348285....69
348286....69

5

561201....890
563009....212
563010....212
563011....212
565007....166
565010....166
565172....174
565173....174
565180....167
565181....167
565182....168
565183....168
565184....169
565185....169
565193....126
565194....127
565220....178
565221....178
565245....129
565246....129
565250....152
565251....152
565252....152
565282....128
565283....128
565284....128
565285....128
565315....156
565316....156
565317....156
565318....156
565327....172
565328....172
565329....172
565332....156
565337....124
565338....124
565339....124
565342....150
565343....148
565344....151
565351....151
565352....170
565353....170
565354....150
565355....116
565356....116
565357....116
565358....116
565359....116
565360....116
565361....148
565362....156
565363....156
565364....156
565365....156
565366....156
565371....116
565372....116
565373....116
565374....116
565375....116
565376....116
565377....116
565378....116
565379....116
565380....117
565381....117
565382....117
565383....117
565384....117
565385....124
565386....124
565387....124
565388....118
565389....118
565390....118
565391....118
565392....118
565393....118
565394....118
565395....118
565396....118
565397....118
565398....118
565399....118
565400....118
565401....118
565402....118
565403....119
565404....119
565405....119
565406....119
565407....119
565408....146
565409....146
565410....158
565411....158
565412....158
565413....158
565414....158
565415....158
565416....158
565417....158
565418....158
565419....158
565420....158
565421....158
565422....160
565423....160
565424....160
565425....160
565426....161
565427....161
565428....161
565429....161
565430....162
565431....162
565432....162
565433....162
565434....162
565435....162
565436....162
565437....162
565438....162
565439....162
565440....162
565441....162
565442....163
565443....163
565444....163
565445....163
565446....164
565447....164
565448....164
565449....164
565450....121
565451....121
565452....121
565453....121
565454....121
565455....122
565456....122
565457....122
565458....122
565459....123
565460....123
565461....123
565462....123
565463....131
565464....131
565465....131
565466....131
565467....131
565468....131
565469....131
565470....131
565471....131
565472....131
565473....131
565474....131
565475....131
565476....131
565477....131
565478....131
565479....131
565480....131
565481....132
565482....132
565483....132
565484....132
565485....132
565486....132
565487....132
565488....132
565489....132
565490....132
565491....132
565492....132
565493....132
565494....132
565495....132
565496....132
565497....132
565498....132
565499....133
565500....133
565501....133
565502....133
565503....133
565504....133
565505....133
565506....133
565507....133
565508....133
565509....133
565510....133
565511....133
565512....133
565513....133
565514....133
565515....133
565516....133
565517....134
565518....134
565519....134
565520....134
565521....134
565522....134
565523....134
565524....134
565525....134
565526....134
565527....134
565528....134
565529....134
565530....134
565531....134
565532....134
565533....134
565534....134
565535....135

565536 135
565537 135
565538 135
565539 135
565540 135
565541 135
565542 135
565543 135
565544 135
565545 135
565546 135
565547 135
565548 135
565549 135
565550 135
565551 135
565552 135
565553 136
565554 136
565555 136
565556 136
565557 136
565558 136
565559 136
565560 136
565561 136
565562 136
565563 136
565564 136
565565 136
565566 136
565567 136
565568 136
565569 136
565570 136
565571 137
565572 137
565573 137
565574 137
565575 137
565576 137
565577 137
565578 137
565579 137
565580 137
565581 137
565582 137
565583 137
565584 137
565585 137
565586 137
565587 137
565588 137
565589 138
565590 138
565591 138
565592 138
565593 138
565594 138
565595 138
565596 138
565597 138
565598 138
565599 138
565600 138
565601 138
565602 138
565603 138
565604 138
565605 138
565606 138
565607 139
565608 139
565609 139
565610 139
565611 139
565612 139
565613 139
565614 139
565615 139
565616 139
565617 139
565618 139
565619 139
565620 139
565621 139
565622 139
565623 139
565624 139
565625 140
565626 140
565627 140
565628 140
565629 140
565630 140
565631 140
565632 140
565633 140
565634 140
565635 140
565636 140
565637 140
565638 140
565639 140
565640 140
565641 140
565642 140
565643 141
565644 141
565645 141
565646 141
565647 141
565648 141
565649 141
565650 141
565651 141
565652 141
565653 141
565654 141
565655 141
565656 141
565657 141
565658 141
565659 141
565660 141
565661 142
565662 142
565663 142
565664 142
565665 142
565666 142
565667 142
565668 142
565669 142
565670 142
565671 142
565672 142
565673 142
565674 142
565675 142
565676 142
565677 142
565678 142
565679 143
565680 143
565681 143
565682 143
565683 143
565684 143
565685 143
565686 143
565687 143
565688 143
565689 143
565690 143
565691 143
565692 143
565693 143
565694 143
565695 143
565696 143
565697 144
565698 144
565699 144
565700 144
565701 144
565702 144
565703 144
565704 144
565705 144
565706 144
565707 144
565708 144
565709 144
565710 144
565711 144
565712 144
565713 144
565714 144
565715 145
565716 145
565717 145
565718 145
565719 145
565720 145
565721 145
565722 145
565723 145
565724 145
565725 145
565726 145
565727 145
565728 145
565729 145
565730 145
565731 145
565732 145
565733 208
565734 208
565736 210
565737 210
565745 157
565746 157
565747 157
565748 157
565749 157
565750 157
565751 157
565752 157
565753 157
565754 157
565755 111
565756 111
565757 111
565758 111

6

620033 64
620034 64
620035 64
620036 64
620037 64
620038 64
620039 64
620040 64
620041 64
620042 64
620043 64
620044 64
620045 64
620046 64
620047 64
620048 64
620049 64
620050 64
620051 64
620052 64
620053 64
620054 64
620055 64
620056 64
620057 250
620102 250
620103 250
620104 252
620105 250
620106 250
620107 250
620108 250
620109 250
620110 250
620111 252
620112 252
620113 252
620114 252
620115 252
620116 252
620117 252
620118 252
620119 400
620120 400
620123 516
620124 516
620125 516
620126 516
620127 516
620128 517
620129 517
620130 517
620194 448
620195 448
620196 448
620197 448
620198 448
620199 448
620200 448
620201 448
620202 450
620203 450
620204 450
620205 450
620206 450
620207 450
620208 450
620209 450
688020 586
688021 586
688025 239
688026 239
688027 239
688028 239
688029 240
688030 240
688031 240
688033 240
688034 240
688035 240
688036 240
688037 240
688038 242
688039 242
688040 242
688041 242
688042 243
688043 243
688044 243
688045 243

7

700229 951

700230 951
707036 423
707037 423
707038 423
707039 423
707040 422
707041 422
707042 422
707043 422
707044 420
707054 423
707055 423
707056 422
707057 422
707079 414
707080 414
707081 414
707082 442
707083 442
707090 421
707091 421
707092 421
707093 421
707094 418
707095 418
707096 418
707097 418
707098 418
707099 418
707100 418
707101 418
707102 418
707103 418
707104 418
707105 418
707106 418
707107 418
707108 418
707109 418
707110 403
707111 403
707112 403
707113 403
707114 403
707115 403
707116 436
707117 436
707118 436
707119 436
707120 436
707121 436
707122 436
707123 436
707124 432
707125 432
707126 432
707127 432
707128 432
707129 432
707130 399
707131 420
707132 440
707133 440
707134 398
707135 398
707136 398
707137 398
707138 399
707139 399
707140 399
707141 408
707142 408
707143 408
707144 408
707145 409
707146 409
707147 402
707148 402
707149 402
707150 402
707151 402
707152 402
707153 402
707154 402
707155 322
707156 322
707161 440
707162 440
707163 331
707164 331
707165 332
707166 332
707167 332
707168 332
707175 333
707176 333
707177 333
707178 333
707183 438
707184 438
707185 328
707186 328
707187 329
707188 329
707189 406
707190 406
707191 406
707192 406
707193 407
707194 407
707195 408
707196 408
707197 408
707198 408
707199 409
707200 409
707201 330
707202 330
707203 441
707204 441
707205 406
707206 406
707207 406
707208 406
707209 407
707210 407
707211 334
707212 334
707213 439
707214 439
707215 335
707216 335
707217 433
707218 433
707219 410
707220 410
707221 410
707222 410
707223 411
707224 411
707226 ..... 294, 296
707227 ..... 294, 296
707228 ..... 294, 296
707229 298
707230 298
707231 298
707232 435
707233 435
707234 431
707235 431
707238 431
707239 431
707240 434
707241 434
707242 434
707243 434
707244 430
707245 430
707246 416
707247 416
707248 416
707249 326
707250 326
707251 413
707252 413
707253 325
707254 325
707255 413
707256 413
707257 325
707258 325
710000 346
710001 346
710002 346
710003 346
710004 346
710005 346
710006 346
710007 346
710008 346
710009 350
710010 350
710011 350
710012 350
710013 350
710014 350
710015 352
710016 352
710017 352
710018 ..... 352, 382
710019 ..... 352, 382
710020 ..... 352, 382
710024 ..... 366, 394
710025 ..... 366, 394
710026 ..... 366, 394
710027 354
710028 354
710029 354
710030 354
710031 354
710032 354
710033 355
710034 355
710035 355
710036 353
710037 353
710038 353
710039 351
710040 351
710041 351
710042 351
710043 351
710044 351
710045 349
710046 349
710047 349
710048 ..... 360, 390
710049 ..... 360, 390
710050 ..... 360, 390
710051 ..... 363, 393
710052 ..... 363, 393
710053 ..... 363, 393
710054 ..... 366, 395
710055 ..... 366, 395
710056 ..... 366, 395
710057 ..... 358, 388
710058 ..... 358, 388
710059 ..... 358, 388
710060 ..... 367, 395
710061 ..... 367, 395
710062 ..... 367, 395
710063 ..... 357, 387
710064 ..... 357, 387
710065 ..... 357, 387
710066 ..... 356, 386
710067 ..... 356, 386
710068 ..... 356, 386
710069 348
710070 348
710071 348
710077 ..... 356, 386
710078 ..... 359, 389
710079 ..... 356, 386
710082 ..... 361, 391
710083 ..... 361, 391
710084 ..... 359, 389
710085 ..... 359, 389
710086 ..... 359, 389
710087 ..... 359, 389
710088 ..... 359, 389
710094 ..... 360, 390
710095 ..... 360, 390
710096 ..... 360, 390
710097 364
710098 364
710099 364
710103 ..... 356, 386
710104 ..... 357, 387
710105 ..... 357, 387
710106 ..... 357, 387
710107 ..... 348, 379
710500 376
710501 376
710502 376
710503 376
710504 376
710505 376
710506 378
710507 378
710508 378
710509 378
710510 378
710511 378
710512 377
710513 377
710514 380
710515 380
710516 380
710517 380
710520 381
710521 381
710523 381
710524 381
710525 382
710526 382
710527 383
710528 383
710530 384
710531 384
710532 384
710533 384
710535 385
710536 385
710538 ..... 356, 386
710539 394
710540 394
720000 308
720001 308
720002 308
720003 308
720004 308
720005 308
720006 310
720007 310
720008 310
720009 310
720010 311
720011 311
720012 312
720013 312
720014 312
720015 312

720016....313
720017....313
720018....313
720019....313
720020....315
720021....315
720022....314
720023....314
720024....315
720025....315
720026....314
720027....314
720028....316
720029....316
720030....316
720031....316
720032....318
720033....318
720034....318
720035....318
720036....317
720037....317
720038....316
720039....316
730007....465
730009....464
730032....465
730034....498
730209....572
730248....572
730255....570
730262....574
730266....571
730267....571
730276....568
730289....570
730292....574
730296....567
730300....954
730301....954
730330....513
730331....513
730336....565
730349....951
730408....522
730419....284
730424....284
730425....284
730432....574
730434....574
730447....562
730450....285
730454....569
730455....285
730459....563
730470....561
730474....560
730475....560
730478....560
730479....560
730480....576
730481....576
730482....576
730483....280
730484....282
730485....283
730486....280
730487....282
730488....283
730489....280
730490....282
730491....283
730492....470
730493....470
730494....470
730495....466
730496....466
730497....466
730498....466
730499....468
730500....468
730501....468
730502....468
730503....468
730504....468
730505....468
730506....468
730509....280
730510....280
730511....280
731015....505
731019....505
731020....505
731024....505
731025....505
731026....505
731029....505
731030....505
731031....499
731060....513
731099....510
731100....510
731116....459
731122....457
731127....508
731129....512
731130....503
731131....503
731133....502
731134....512
731135....512
731136....512
731138....514
731139....515
731140....514
731141....515
731144....502
731151....500
731153....501
731154....501
731155....501
731156....501
731157....500
731158....518
731159....518
731160....286
731161....286
731162....286
731163....288
731164....288
731165....288
731166....289
731167....289
731168....289
731169....491
731170....491
731171....491
731172....491
731173....491
731174....491
731175....497
731176....497
731177....497
731178....497
731179....497
731180....497
731181....488
731182....488
731183....488
731184....488
731185....488
731186....488
731187....494
731188....494
731189....494
731190....494
731191....494
731192....494
731193....496
731194....496
731195....496
731196....490
731197....490
731198....490
731199....493
731200....493
731201....493
731202....487
731203....487
731204....487
731205....486
731206....486
731207....486
731208....492
731209....492
731210....492
731211....484
731212....484
731213....484
731214....485
731215....485
731216....485
731217....489
731218....489
731219....489
731220....495
731221....495
731222....495
731223....506
731224....506
731225....507
731226....507
732049....573
732050....573
732064....582
732071....556
732072....556
732079....557
732080....557
732094....549
732095....549
732096....583
732097....583
732098....583
732102....583
732105....582
732108....550
732109....551
732110....552
732127....550
732128....551
732129....552
732137....553
732143....573
732147....581
732148....581
732149....581
732150....581
732151....581
732152....581
732156....274
732157....277
732158....274
732159....277
732160....548
732161....548
732162....270
732163....272
733004....478
733040....474
733041....474
733042....474
733043....476
733044....476
733045....476
733046....458
733049....456
733050....456
733054....536
733055....536
733064....540
733065....540
733066....538
733067....538
733068....480
733069....480
733070....542
733071....542
733072....472
733073....472
763025....526
763026....528

8

829063....948
836011....532
836014....532
836930....532
836931....532
840122....803
840124....820
840147....814
840158....806
840159....806
840164....801
840165....801
840166....801
840167....801
840175....807
840178....814
840179....814
840180....814
840186....811
840187....811
840192....820
840193....820
840194....820
840210....807
840236....817
840239....815
840254....812
840256....813
840267....807
840276....810
840283....829
840285....835
840286....836
840287....831
840288....833
840289....837
840290....831
840291....804
840293....856
840294....856
840295....856
840296....796
840304....796
840308....823
840309....823
840317....853
840318....852
840319....853
840320....852
840321....799
840322....799
840323....798
840324....798
840331....821
840332....821
840333....822
840334....822

840337....852
840338....853
840339....852
840340....853
840349....809
840350....808
840351....825
840352....824
840353....816
840373....818
840374....794
840375....797
840376....827
840378....819
840386....855
840387....855
840388....855
840389....855
840390....855
840391....855
840392....856
840393....850
840394....850
840395....850
840396....851
840397....851
840398....851
840399....848
840400....849
840401....850
840402....850
840403....850
840404....851
840405....851
840406....851
840407....848
840408....849
840409....787
840410....787
840411....787
840412....787
840413....788
840414....788
840415....788
840416....788
840417....839
840418....839
840419....839
840420....790
840421....790
840422....790
840423....790
840424....790
840425....790
840426....790
840427....790
840428....790
840429....790
840430....792
840431....792
840432....792
840433....792
840434....842
840435....843
840436....842
840437....843
840438....842
840439....843
840440....850
840441....851
840442....850
840443....851
840444....850
840445....851
840446....848
840447....849
840448....844
840449....845
840450....844
840451....845
840452....844
840453....845
840454....846
840455....847
840456....846
840457....847
840458....846
840459....847
840460....846
840461....847
840462....846
840463....847
840464....846
840465....847
843008....920
843011....920
843037....921
843047....922
843049....921
843050....921
843054....925
843055....950
843273....924
843279....923
843340....927
843341....928
843342....928
843343....929
843344....929
843500....901
843501....902
843502....903
843503....904
843504....905
843505....906
843506....907
843507....917
843508....908
843509....908
843510....909
843511....909
843512....913
843513....914
843514....916
843518....580
843519....580
843520....580
843521....546
843522....915
843523....910
843524....911
843525....912
843527....918
843529....919
843530....425
843531....425
843532....938
843533....941
843534....942
862048....882
862093....869
862094....869
862121....869
862122....869
862123....869
862124....869
862125....869
862126....869
862127....870
862128....881
862129....881
862130....882
862136....885
862141....886
862157....883
862162....870
862163....870
862164....870
862165....870
862166....870
862167....870
862168....870
862172....869
862173....869
862180....365
862181....365
862182....365
862183....365
862184....365
862185....365
862190....889
862191....889
862192....889
862193....889
862194....889
862196....883
862197....883
862198....883
862199....883
862201....883
862202....885
862203....885
862204....885
862205....885
862207....885
862208....885
862209....885
862210....885
862211....885
862212....881
862220....873
862221....873
862222....873
862223....882
862224....882
862225....882
862226....882
862227....882
862228....882
862229....868
862230....868
862231....869
862232....869
862233....869
862234....869
862235....884
862236....884
862237....884
862238....882
862239....882
862240....873
862241....873
862242....873
862246....890
862247....890
862248....890
862253....875
862254....875
862255....875
862256....875
862257....885
862258....885
862259....885
862262....875
862263....875
862264....885
862265....869
862266....886
862268....872
862269....872
862270....869
862271....869
862272....869
862273....875
862274....873
862275....875
862276....875
862277....873
862278....873
862280....872
862281....872
862282....872
862283....872
862285....885
872014....884
872045....872
872046....872
872082....870
872083....870
872084....870
872085....870
872086....870
872087....870
872088....870
872089....870
872091....870
872093....870
872094....870
872097....871
872098....871
872099....871
872100....871
872101....871
872102....871
872103....871
872104....871
872105....871
872106....871
872107....871
872108....871
872109....876
872110....876
872111....876
872112....876
872113....876
872114....876
872115....876
872125....871
872126....875
872127....868
872128....868
872129....881
872130....881
872131....881
872132....884
872134....884
872135....874
872136....874
872137....874
872138....874
872142....874
872143....874
872145....870
872146....876
872147....876
872148....876
872628....882
872629....869
872630....869

9

930060....950
930104....959
930105....959
930301..95, 225, 231, 327, 417
930302..95, 225, 231, 327, 417
930303..95, 225, 231, 327, 417
930345....856
930346....856
930347....856
930348....856

930349....856
930350....856
930366..95, 225, 231, 327, 417
930405....856
930406....856
930413....527
930414....527
930415....527
930416....527
930417....527
930418....527
930419....527
930420....527
930421....527
930422....527
930423....527
930424....527
930426....951
930427....951
930461....529
930468....529
930469....529
930470....529
930471....529
930472....529
930473....529
930474....529
930475....529
930476....529
930477....529
930478....529
930480....214
930481....215
930482....214
930483....214
930484....214
930485....214
930486....214
930487....214
930488....214
930489....214
930490....214
930491....214
930492....214
930493....214
930494....215
930495....215
930496....215
930497....215
930498....215
930499....215
930500....215
930501....215
930502....215
930503....215
930504....215
930505....215
930512....814
930517....817
930571....955
930573....955
930574....958
930575....957
930578....956
930593....959
930611....454
930612....454
930613....454
930614....454
930615....454
930616....454
930617....454
930618....455
930619....455
930620....455
930621....455
930622....455
930623....455
930624....455
930625....455
930626....455
930627....455
930628....455
930629....455
930630....455
930631....455
930659....951
930694....949
930712....956
930735....957
930842....214
930843....215
930860....214
930861....215
930908....50
930909....50
930913....54
930914....54
930965....50
930966....50
930967....113, 165
930968....113, 165
930969....113, 165
930970....113, 165
930971....113, 165
930972....113, 165
930973....113, 165
930974....113, 165
930975....113, 165
930976....113, 165
931007....209
931009....209
931010....211
931012....211
931013....209
931015....209
931016....211
931018....211
931019....209
931021....209
931022....211
931024....211
931025....209
931027....209
931028....211
931030....211
931031....209
931033....209
931034....211
931036....211
931037....209
931039....209
931040....211
931042....211
931043....113, 165
931044....113, 165
931045....113, 165
931046....113, 165
931047....113, 165
931048....113, 165
931049....113, 165
931050....113, 165
931051....113, 165
931052....113, 165
931053....95, 327, 417
931054....95, 327, 417
931055....95, 327, 417
931056....95, 327, 417
931057....95, 327, 417
931058....95, 327, 417
931059....225, 231
931060....225, 231
931061....225, 231
931062....225, 231
931063....225, 231
931064....225, 231
940010....954
940029....953
940030....953
940031....953
940033....953
940034....953
940035....953
940037....952
940038....952
940039....952
940041....954
940042....954
940043....954
940045....954
940046....954
940047....954
940049....953
940050....953
940051....953
940056....952
940057....952
940058....951
940059....951
940060....951
940061....952
940062....952
940063....952
950216....594
950217....594
950218....594
950219....594
950220....594
950221....594
950222....594
950223....594
950224....594
950225....594
950226....594
950227....594
950228....594
950229....594
950230....594
950231....594
950232....594
950233....594
950234....595
950235....595
950236....595
950237....595
950238....595
950239....595
950240....595
950241....595
950242....595
950243....595
950244....595
950245....595
950246....595
950247....595
950248....595
950249....595
950250....595
950251....595
950252....596
950253....596
950254....596
950255....596
950256....596
950257....596
950258....596
950259....596
950260....596
950261....596
950262....596
950263....596
950264....596
950265....596
950266....596
950267....596
950268....596
950269....596
950270....597
950271....597
950272....597
950273....597
950274....597
950275....597
950276....597
950277....597
950278....597
950279....597
950280....597
950281....597
950282....597
950283....597
950284....597
950285....597
950286....597
950287....597
950918....598
950919....598
950920....598
950921....598
950922....598
950923....598
950924....598
950925....598
950926....598
950927....598
950928....598
950929....598
950930....598
950931....598
950932....598
950933....598
950934....598
950935....598
970000....666
970001....666
970003....666
970005....666
970008....666
970020....670
970021....670
970023....670
970025....670
970028....670
970040....674
970041....674
970043....674
970045....674
970048....674
970060....678
970061....678
970063....678
970065....678
970068....678
970081....662
970085....662
970101....668
970103....668
970105....668
970108....668
970120....672
970121....672
970123....672
970125....672
970128....672
970140....676
970141....676
970143....676
970145....676
970148....676
970160....680
970161....680
970163....680

970165 680
970168 680
970180 664
970181 664
970183 664
970185 664
970201 682
970202 682
970231 704
970280 708
970281 708
970284 708
970285 708
970301 720
970303 720
970305 720
970308 720
970401 724
970403 724
970404 724
970460 716
970470 718
970502 712
970503 712
970520 714
970522 714
970523 714
970550 728
970551 728
970560 730
970561 730
970570 732
970571 732
970572 622
970573 622
970574 622
970575 622
970576 622
970577 622
970578 623
970579 623
970580 623
970581 623
970582 623
970583 623
970584 624
970585 624
970586 624
970587 624
970588 624
970589 624
970600 722
970601 722
970602 722
970723 772
970724 772
970741 776
970800 634
970801 634
970802 634
970803 634
970804 635
970805 635
970806 635
970807 635
970808 635
970809 635
970820 638
970821 638
970822 638
970823 638
970824 638
970825 638
970826 638
970827 638
970828 638
970829 643
970830 643
970831 643
970832 643
970833 639
970834 639
970835 639
970836 639
970837 639
970838 639
970839 639
970840 639
970841 639
970842 648
970843 648
970844 648
970845 648
970846 648
970847 648
970848 648
970849 648
970850 648
970860 649
970861 649
970862 649
970863 649
970864 649
970865 649
970866 649
970867 649
970868 649
970869 642
970870 642
970871 642
970872 642
975001 686
975003 686
975005 686
975008 686
975021 690
975023 690
975025 690
975028 690
975041 694
975045 694
975063 698
975065 698
975081 684
975083 684
975085 684
975101 688
975103 688
975105 688
975108 688
975121 692
975123 692
975125 692
975128 692
975141 696
975143 696
975145 696
975148 696
975161 700
975163 700
975165 700
975168 700
975231 ..... 706, 709
975331 756
975334 756
975341 762
975344 762
975351 766
975353 766
975360 758
975361 758
975365 758
975371 764
975375 764
975381 768
975385 768
975390 760
975391 760
975394 760
975395 760
975411 726
975412 726
975471 738
975475 738
975476 738
975483 740
975485 740
975486 740
975491 736
975495 736
975496 736
975501 744
975511 748
975516 750
975521 752
975525 746
975530 742
975724 774
975741 778
975781 780
988170 645
988171 645
988172 645
988173 645

In addition to the main catalogue, there are also our product-specific brochures. Would you prefer to browse through our publications online or on your tablet? You can find our catalogues and brochures on our homepage for browser viewing and as a PDF download.

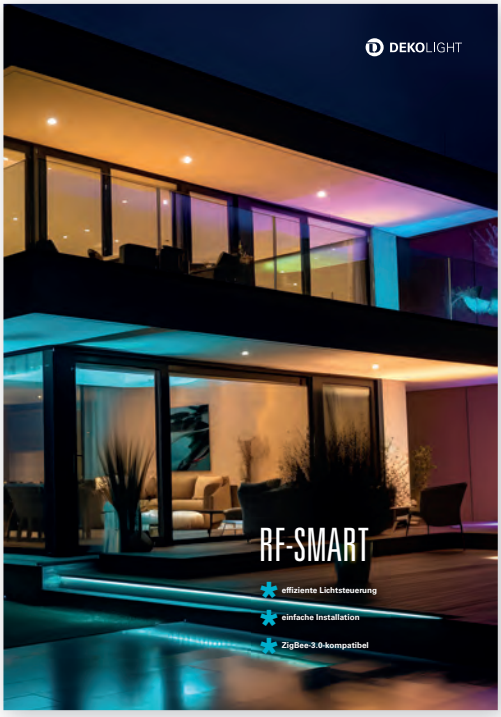

All prices are recommended gross sales prices including VAT. We keep the right to adjust the prices during the validity of the catalogue. You will always find the current prices on our website. Our general terms and conditions apply. Errors and availability reserved. All articles are basically delivered without illuminants, unless the product description specifies otherwise.

DEKOLIGHT

DEKO-LIGHT
Elektronik Vertriebs GmbH
Auf der Hub 2
76307 Karlsbad

T +49 7248 9271 600

exporteu@deko-light.com
deko-light.com

Hersteller / manufacturer: DEKO-LIGHT Elektronik Vertriebs GmbH

item no. 333668