



OUTDOOR LIGHTS



YOUR PERSONAL CONTACT PERSONS

Your personal advisors in the office and in the field are available to answer all your questions about our products and services.



MIRJAM GEBHARD

Key Account International

T +49 7248 9271 604

M +49 170 455 62 55

mirjam.gebhard@deko-light.com



SANDY TREIBER

Key Account International

T +49 7248 9271 603

M +49 151 724 525 83

sandy.treiber@deko-light.com

EXTERIOR LIGHTS

The right outdoor lighting ensures safety, orientation and a convincing first impression. Whether on façades, in entrance areas, on paths or car parks - well thought-out lighting concepts create functionality and set the scene for buildings.

In this catalogue you will find outdoor luminaires for a wide range of requirements. Robust construction, high protection ratings and energy-efficient LED technology ensure reliable use in all weathers. From functional ambient lighting to targeted accent lighting - with our solutions, outdoor lighting becomes an effective part of your architecture.

BATTERY LIGHTS

006 battery lights

OUTDOOR LIGHTS

012 bollard lights
 030 surface mounted wall lights
 072 ceiling and wall lights
 078 spherical lamps
 082 energy distributor
 090 surface mounted / ground spike lights
 100 wall washer
 104 ground recessed lights
 120 floodlight
 586 display lights
 128 accessories



5-year guarantee

Benefit from the maximum quality promise:

All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

OUTDOOR LIGHTING – WORLDS OF LIGHT IN EVERY SIZE

What could be nicer than sitting outside on a warm summer evening at the blue hour or after sunset and enhancing the relaxed atmosphere with stylish outdoor lighting? We present three typical lighting scenarios - from small front gardens to extensive garden areas.

When lighting outdoor areas, different conditions apply to indoor areas. Not only must the lighting technology be protected against the effects of the weather, but the lack of spatial boundaries in some cases also requires different planning of light points and luminaire types. At the same time, the integration of the natural surroundings (trees, hedges, etc.) offers a multitude of creative possibilities. On the following pages you will find various outdoor scenarios and receive tips and inspiration for optimal lighting.



Scenario 1: Front garden / entrance area

Whether it's a small strip of front garden or a spacious entrance area - this is often the first thing guests see. In our example, our TUCANAE bollard luminaires accompany them on their walk and guide them safely to the house at dusk and in the dark. Our simple, elegant CASA surface-mounted wall light can be quickly and easily transformed into a house number light with the optional number and letter set so that guests, postmen and parcel carriers can easily find the right address. In addition, recessed floor spotlights create an atmospheric setting for the façade of the house.

TUCANAE floor lamp, see page 28

CASA surface-mounted wall light, see page 70

CANUM recessed floor spotlight, see page 117



Scenario 2: Terrace

The patio area is framed by three free-standing luminaires, each around 48 cm high, which also serve as a socket tower (IP67-certified) and provide power for electrical appliances - from smartphone chargers to electric barbecues - via two connections each. RILONGO and ARCTURUS I surface-mounted wall lights were installed on the side walls. Additional light is provided by two TUCANAE MOTION surface-mounted wall luminaires mounted at the same height, which impress with their modern, minimalist design and ensure even illumination. Mobile light wherever you need it is provided by the CANIS rechargeable floor lamps, which can be dimmed at the touch of a finger and cut an excellent figure both on the floor and on tables.

RILONGO surface-mounted wall light, see page 64

ARAWAN energy distributor, see page 84

CANIS battery-powered light, see page 8

ARCTURUS I surface-mounted wall light, see page 60

TUCANAE MOTION surface-mounted wall light, see page 49



Scenario 3: Garden


In the garden, it is important to emphasise the natural surroundings and to set trees and plants in the right light. In our example, several recessed floor spotlights around the birch create an impressive interplay of light and shadow in the branches. The surface-mounted spotlights from the COLT series are suitable for smaller bushes and objects, discreetly and precisely illuminating individually positioned bushes and adding depth to the delicate palisade lattice around the garage extension. Our free-standing spherical luminaires provide accents along the footpath, which can be illuminated and dimmed in different shades of white or RGB colours with the appropriate light source - and of course also smartly programmed for automatically changing lighting scenes.

COLT surface-mounted spotlight, see page 96


DORADUS globe light, see page 80

SOFT FLEX recessed floor spotlight, see page 110





page 8



page 10

Battery lights



CANIS SET

Discover our portable cordless LED lamps from the CANIS series. With a 3.5 W output and 270 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to six lamps at the same time with the optional charging dock, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base





CANIS SET


- Pleasant and wide light distribution
- More than eight hours of light after charging
- Infinitely dimmable via touch sensor
- Light colour adjustable in two stages
- Charge up to six cordless lamps using the stackable charging dock [optional]
- Includes USB charging base

Application Area

Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	112 mm
Surface	Matt	Power	3.5 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	270 lm	Light Beam Angle	100 Degree
Height	370 mm	CRI (Ra)	80

Article	Housing Color	Price
620194	Sand	€ 109.95
620195	Green	€ 109.95
620196	Terracotta	€ 109.95
620197	Blue	€ 109.95
620198	Rust	€ 109.95
620199	White	€ 109.95
620200	Black	€ 109.95
620201	Dark grey	€ 109.95



Accessory

930716 6-way charging station incl. power supply for Canis light

€ 199.95

930887 USB-A plug-in power supply 5V DC, 1,000 mA, black

€ 8.95



CANIS MINI SET

Discover our portable cordless LED lamps from the CANIS series. With a 2.3 W output and 110 lm of brightness, our lamps provide a particularly wide and pleasant light distribution. And the infinitely variable dimming function allows you to set the perfect illumination using the practical touch sensor. Choose from two light colour levels to create the perfect atmosphere. And the best part? One battery charge is enough for more than eight hours of lighting. You can charge up to 15 lamps at the same time with the optional charging station, so you always have enough lights to hand. Choose from eight colours, including trendy pastel tones, to reflect your personal style.

Note: Includes USB charging base





CANIS MINI SET

- Pleasant and wide light distribution
- More than eight hours of light after charging
- Infinitely dimmable using touch sensor
- Light colour adjustable in two stages
- Charge up to 15 cordless lamps using the stackable charging dock [optional]
- Includes USB charging base

Application Area

Garden / Terrace / Balcony / Walkways, Reception / Communication, Home / Living, Hotel / catering

Housing	Aluminium	Ø	76 mm
Surface	Matt	Power	2.3 W
Colour Temperature	2200/3000 K	Rated Input Voltage	3.7 V/DC
Luminous Flux	110 lm	CRI (Ra)	80
Height	208 mm		

Article	Housing Color	Price
620202	Sand	€ 99.95
620203	Green	€ 99.95
620204	Terracotta	€ 99.95
620205	Blue	€ 99.95
620206	Rust	€ 99.95
620207	White	€ 99.95
620208	Black	€ 99.95
620209	Dark grey	€ 99.95



Accessory

930734 15-way charging station incl. power supply unit for Canis Mini light

€ 299.95

930887 USB-A plug-in power supply 5V DC, 1,000 mA, black

€ 8.95



Bollard lights



■
page 14



■ ■
page 16



■
page 18



■
page 20



■
page 22



■
page 24



■
page 26



■
page 28






FACADO 2 SQUARE

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides even better illumination. The FACADO light is made from high-quality die-cast aluminium and available in dark grey or rust and in square or rounded designs.

The IP67 connection box features a double M20 cable gland suitable for buried cables in sizes 3 × 1.5 mm², 5 × 1.5 mm² or 3 × 2.5 mm², and more.





FACADO 2 SQUARE

- IP65 weather resistance
- IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²
- Newly designed lamp head for improved illumination
- Available with an opal diffuser or a transparent diffuser with smoked glass
- Ideal for e.g. ST64 bulbs and A60/70 bulbs

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Length	108 mm	Control	Dimmable via optional light source
Width	108 mm	IK Protection Class	IK05

Article	Housing Color	Height	Colour of Light Output	Price
730495	Dark grey	650 mm	White	€ 149.95
730496	Dark grey	650 mm	Smoke-coloured	€ 149.95
730497	Dark grey	1000 mm	Smoke-coloured	€ 199.95
730498	Dark grey	1000 mm	White	€ 199.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68




€ 2.10



FACADO 2 ROUND

Our FACADO series bollard lights feature IP65 degree of protection for excellent weather resistance. Choose between an opal diffuser or a transparent diffuser with smoked glass to suit your requirements. The series is available in two different sizes (650 mm/1,000 mm) and features an E27 socket for replaceable lamps. The newly designed lamp head provides significantly improved illumination. The FACADO light is made of high-quality, die-cast aluminium and is available in dark grey or rust and in square or round designs. The IP67 connection box features a double M20 cable gland suitable for e.g. buried cables in sizes 3x1.5 mm², 5x1.5 mm² or 3x2.5 mm².





FACADO 2 ROUND

- IP65 weather resistance
- IP67 connection box suitable for e.g. buried cables 3x1.5 mm²/5x1.5 mm²/3x2.5 mm²
- Newly designed lamp head for improved illumination
- Available with an opal diffuser or a transparent diffuser with smoked glass
- Ideal for e.g. ST64 bulbs and A60/70 bulbs

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Rated Input Voltage	220-240 V/AC
Surface	Matt	Control	Dimmable via optional light source
Ø	108 mm	IK Protection Class	IK05
Max. Power	1x max. 20 W		

Article	Housing Color	Height	Colour of Light Output	Price
730499	Dark grey	650 mm	Smoke-coloured	€ 149.95
730501	Rust	650 mm	Smoke-coloured	€ 149.95
730500	Dark grey	650 mm	White	€ 149.95
730502	Rust	650 mm	White	€ 149.95
730503	Dark grey	1000 mm	Smoke-coloured	€ 199.95
730505	Rust	1000 mm	Smoke-coloured	€ 199.95
730504	Dark grey	1000 mm	White	€ 199.95
730506	Rust	1000 mm	White	€ 199.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 2.10



FARO DALI

The solid FARO bollard lights made from die-cast aluminium are available in the sizes 25, 60 and 100 cm. Their design [more than 97 % of light directed downwards] and lens optics allow glare-free light distribution and a particularly large light beam of up to 10 metres in diameter. All variants are also DALI2 DT6 compatible. The FARO models can be equipped with an optional screening shade to illuminate surfaces on one side only. The IP68 connection box with possible feed-through wiring and the dirt-repellent powder coating in DB703 make the FARO bollard lights a long-lasting and high-quality choice for your outdoor lighting.






FARO DALI

- Glare-free, light directed downwards (>97 %)
- Lens optics for wide homogeneous illumination with up to 4/7/10 m diameter
- Optional screening shade for darkening on one side
- IP68 connection box with feed-through wiring
- Particularly high-quality and solid construction
- Dirt-repellent powder coating in DB703
- Emergency power capable (180-264 V/DC EOFI: 100 %)

Application Area


Garden / Terrace / Balcony / Walkways, Park / public outdoor area, Object lighting / architecture

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	360 Degree
Luminous Flux	1030 lm	Light Beam Angle 2	180 Degree
Ø	180 mm	Control	DALI 2 / DT6
Power	24 W	CRI (Ra)	80
Rated Input Voltage	180-264 V/AC	IK Protection Class	IK10



730492

Article	Housing Color	Height	Price
730492	Dark grey	250 mm	€ 439.95
730493	Dark grey	600 mm	€ 509.95
730494	Dark grey	1000 mm	€ 589.95

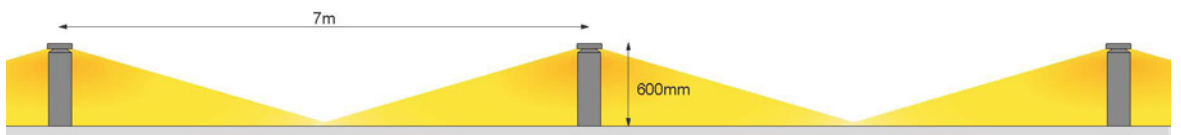

Accessory

930731	Concrete anchor for Faro 180mm series		€ 24.95
930776	Screening shade 180 degrees for Faro 180mm series		€ 9.95
931099	Cable gland PG/M25 incl. locknut + sealing ring, IP68		€ 2.70



LERNA

LERNA series bollard lights offer a number of advantages. The ability to adjust the light colour in 2 stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a power rating of 7.4 W and up to 256 lm, the light itself is incredibly bright.





LERNA

- Light colour adjustable in two stages
- Light directed fully downwards to prevent light pollution

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06

Article	Housing Color		Height	Price
733073	Dark grey	WW NW	600 mm	€ 209.95
733072	Dark grey	WW NW	1000 mm	€ 259.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68





€ 2.10



CATA

The CATA series impresses not only as a modern path light, but also as a standalone lighting and design feature when creating outdoor spaces. The LEDs not only ensure full-surface illumination of paths and entrance areas but also inevitably draw attention to the striking frame construction. Available in three sizes, the CATA IV models can also be combined really well.

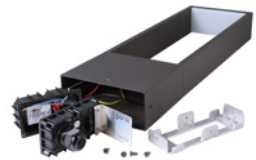




CATA

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Height	20 mm
Colour Temperature	3000 K	Power	4 W
Luminous Flux	350 lm	Rated Input Voltage	100-240 V/AC
Length	151 mm	Power Supply Unit incl.	Yes
Width	61 mm	Light Beam Angle	120 Degree
Base Length	145 mm	Primary Connection End	Connection box IP65
Base L x W x H	145 x 55 x 20 mm	CRI (Ra)	80
Base Width	55 mm		



733040

Article	Housing Color		Height	Price
733040	■ Dark grey	ww	500 mm	€ 199.95
733041	■ Dark grey	ww	700 mm	€ 219.95
733042	■ Dark grey	ww	1000 mm	€ 239.95





CHERTAN

With its extraordinary mix of materials consisting of die-cast aluminium housing and base made of weather-resistant, fibreglass-reinforced concrete, the CHERTAN outdoor standing light certainly stands apart from other models just on looks alone. With its pleasantly warm white light and light emission angle of 120°, the outdoor light is perfectly suited for decorative use in entrance areas, on paths or in the garden.

Note: As concrete is a natural product, every surface is unique and forms a distinct patina over time, depending on local conditions. It is therefore normal in wet conditions for a blotchy surface to form that disappears again when dried, yet produces an individual patina over the long-term.





CHERTAN

· Fibreglass-reinforced and weather-resistant concrete base

Application Area

Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Aluminium	Base Height	40 mm
Colour Temperature	3000 K	Power	13 W
Length	170 mm	Rated Input Voltage	100-240 V/AC
Width	72 mm	Power Supply Unit incl.	Yes
Base Length	160 mm	Light Beam Angle	120 Degree
Base L x W x H	160 x 30 x 40 mm	Primary Connection End	Connection box IP54
Base Width	30 mm	CRI (Ra)	90

Article	Housing Color		Luminous Flux	Height	Price
733043	■ Dark grey	ww	480 lm	450 mm	€ 199.95
733044	■ Dark grey	ww	530 lm	600 mm	€ 219.95
733045	■ Dark grey	ww	640 lm	1000 mm	€ 239.95





ORTIS

The Ortis LED bollard light cuts an excellent figure anywhere with its dark grey aluminium housing and, thanks to its IP54 certification, is suitable for flexible outdoor use in gardens, entrances and as path lighting. In addition, the Ortis has an internal slatted insert in the lamp head, which ensures a pleasant dimmed light that is directed downwards (warm white, 3,000 K).






ORTIS

· Light directed downwards, dimmed by the slatted insert

Application Area


Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Luminous Flux	510 lm	Light Beam Angle	360 Degree
Height	1000 mm	Primary Connection End	Connection box
Ø	120 mm	CRI (Ra)	80
Power	15.9 W	IK Protection Class	IK05



733004

Article	Housing Color		Price
733004	Dark grey		€ 219.95



Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.



TUCANAE

With its slim, unfussy housing design, the TUCANAE is a modern outdoor light that can be integrated almost anywhere. The 100-cm-high bollard light emits its warm white light diagonally downwards onto paths and other surfaces and, in the MOTION variant, has an integrated twilight switch with adjustable brightness threshold and operating time.






TUCANAE

- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [733068]

Application Area


Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	180 mm
Colour Temperature	3000 K	Base Height	10 mm
Luminous Flux	2150 lm	Power	18 W
Length	206 mm	Rated Input Voltage	110-240 V/AC
Width	180 mm	Power Supply Unit incl.	Yes
Height	1000 mm	Light Beam Angle	120 Degree
Base Length	120 mm	Primary Connection End	Connection box
Base L x W x H	120 x 180 x 10 mm	CRI (Ra)	80




733068

Article	Housing Color	IP Protection Type	Motion Detector	Price
733068	■ Dark grey ww	IP 54	Infrared	€ 293.95
733069	■ Dark grey ww	IP 65	No	€ 259.95



5-year guarantee

Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



Surface mounted wall lights



■ ■ □
page 34



■ ■ □
page 35



■ ■ □
page 36



■ ■ □
page 37



■ ■ □
page 38



■ ■ □
page 39



■ ■ □
page 40



■ ■ □
page 41



■ ■ □
page 42



■ ■ □
page 43



■ ■ □
page 44



■ ■ □
page 45



■ ■ ■
page 46



■ ■ ■
page 47



■
page 48



■
page 49



■ ■
page 50



■
page 51



■ ■ ■ ■
page 52



■ ■ ■ ■
page 53



■ ■ ■
page 54



■ ■ ■
page 54



■
page 55



■
page 55



■ ■
page 56



■ ■
page 57



■
page 58



■
page 60



■
page 62



■
page 62



■
page 64



■
page 66



■
page 67



■
page 68



■ ■
page 70



■ ■ ■ ■
page N/A

SHORELINE

The SHORELINE PRO series comprises high-quality surface-mounted wall luminaires for outdoor use and offers maximum design freedom for modern façade and project lighting. With over a dozen variants in round or square design, each as a downlight or up+down version, the series covers a wide range of applications - from residential and commercial properties to hotel and catering buildings.

All luminaires are made of robust die-cast aluminium, are resistant to seawater and have an IP65 protection rating and IK08 impact resistance. The integrated technology allows two-stage switching of the colour temperature [3,000K/4,000K] directly on the device, while the high-quality optics ensure targeted, uniform light distribution.





These luminaires have been developed for use in coastal regions and can withstand the increased salt and humidity in the environment - ideal for outdoor areas near the sea.



CCT

The integrated CCT function enables flexible selection of the light colour between warm white and neutral white light. This allows the lighting to be optimised for different applications and environments.

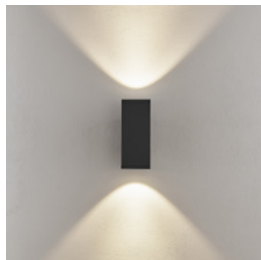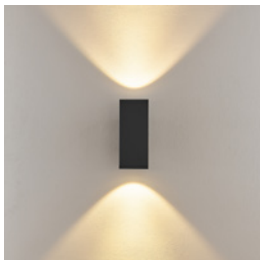

SIMPLE INSTALLATION

The SHORELINE PRO series has been specifically designed for quick and safe installation and impresses with several well thought-out mounting details:


- separable mounting plate with plug-in connection for easy pre-assembly
- angled fixing screws ensure better accessibility during screw connection
- through-wiring for series mounting
- optionally available spacers enable elegant and clean surface mounting - even on uneven surfaces



ACCESSORIES FOR SHORELINE PRO

- reflector inserts: 24°, 30°, 36°, 60° [depending on model]
- covers: with slotted or triangular opening [for targeted light emission]
- spacers: for clean surface mounting on uneven surfaces

Note: All accessories are colour-matched to the housing colour [white, black, grey].

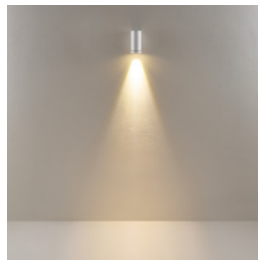








SHORELINE PRO ROUND

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Height	140 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm	IK Protection Class	IK08
Base L x W x H	43 x 55 x 130 mm	Colour of Light Output	Clear
Base Width	55 mm		
Base Height	130 mm		

Article	Housing Color	Price
731211	 Light grey	€ 89.95
731212	 Dark grey	€ 89.95
731213	 White	€ 89.95



Accessory

930874	Spacer for ShoreLine Pro series, light grey	****	€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey	****	€ 5.95
930880	Spacer for ShoreLine Pro series, white	****	€ 5.95






SHORELINE PRO ROUND UP+DOWN

- continuous wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Max. Power	2x max. 7.5 W
Height	158 mm	Rated Input Voltage	220-240 V/AC
Ø	68 mm	Control	Dimmable via optional light source
Base Length	43 mm	IK Protection Class	IK08
Base L x W x H	43 x 55 x 130 mm	Colour of Light Output	Clear
Base Width	55 mm		
Base Height	130 mm		

Article	Housing Color	Price
731214	 Light grey	€ 99.95
731215	 Dark grey	€ 99.95
731216	 White	€ 99.95



Accessory

930874	Spacer for ShoreLine Pro series, light grey	****	€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey	****	€ 5.95
930880	Spacer for ShoreLine Pro series, white	****	€ 5.95

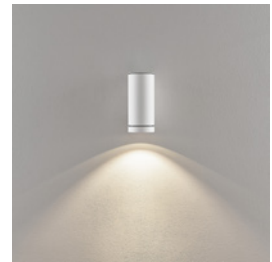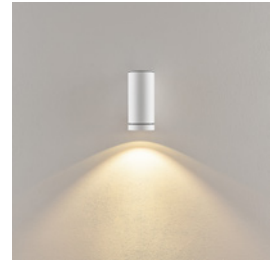







SHORELINE PRO ROUND 68

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area








Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	6 W
Luminous Flux	480/550 lm	Rated Input Voltage	220-240 V/AC
Height	150 mm	Power Supply Unit incl.	Yes
Ø	68 mm	Light Beam Angle	30 Degree
Base Length	43 mm	Control	Trailing-edge dimmer
Base L x W x H	43 x 55 x 130 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08

Article	Housing Color	Price
731217	 Light grey 	€ 169.95
731218	 Dark grey 	€ 169.95
731219	 White 	€ 169.95



Accessory

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey		€ 7.95
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey		€ 7.95
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome		€ 7.95
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome		€ 7.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95



SHORELINE PRO ROUND UP+DOWN 68


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	7.5 W
Luminous Flux	700/780 lm	Rated Input Voltage	220-240 V/AC
Height	186 mm	Power Supply Unit incl.	Yes
Ø	68 mm	Light Beam Angle	30 Degree
Base Length	43 mm	Control	Trailing-edge dimmer
Base L x W x H	43 x 55 x 130 mm	CRI (Ra)	90
Base Width	55 mm	IK Protection Class	IK08

Article	Housing Color		Price
731220	Light grey	WW NW	€ 199.95
731221	Dark grey	WW NW	€ 199.95
731222	White	WW NW	€ 199.95



Accessory

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey		€ 7.95
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey		€ 7.95
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome		€ 7.95
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome		€ 7.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

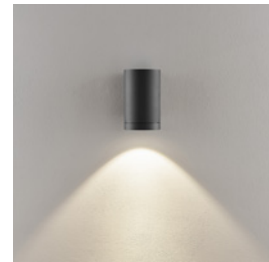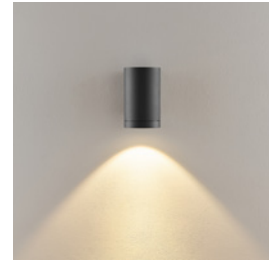







SHORELINE PRO ROUND 100

- light colour adjustable in 2 stages
- through-wiring possible
- seawater-resistant
- easy and quick installation
- separable mounting plate with plug-in connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area








Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering




Housing	Aluminium	Power	12 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	900/1000 lm	Power Supply Unit incl.	Yes
Height	163 mm	Light Beam Angle	36 Degree
Ø	100 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base L x W x H	40 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		
Base Height	130 mm		

Article	Housing Color		Price
731196	 Light grey		€ 189.95
731197	 Dark grey		€ 189.95
731198	 White		€ 189.95



Accessory

930867	Cover, 100, line, ShoreLine Pro Series, dark grey		€ 9.95
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey		€ 9.95
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome		€ 14.95
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome		€ 14.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

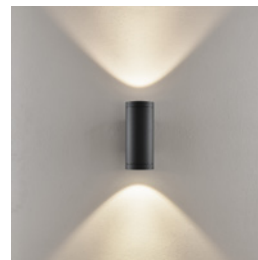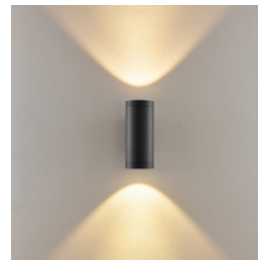

SHORELINE PRO ROUND UP+DOWN 100

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	20 W
Luminous Flux	1700/1900 lm	Rated Input Voltage	220-240 V/AC
Height	238 mm	Power Supply Unit incl.	Yes
Ø	100 mm	Light Beam Angle	36 Degree
Base Length	40 mm	Control	Trailing-edge dimmer
Base L x W x H	40 x 80 x 130 mm	CRI (Ra)	92
Base Width	80 mm	IK Protection Class	IK08

Article	Housing Color		Price
731193	Light grey	WW NW	€ 259.95
731194	Dark grey	WW NW	€ 259.95
731195	White	WW NW	€ 259.95



Accessory

930867	Cover, 100, line, ShoreLine Pro Series, dark grey		€ 9.95
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey		€ 9.95
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome		€ 14.95
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome		€ 14.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

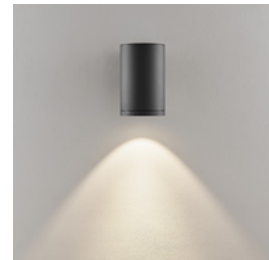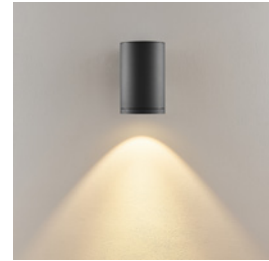

SHORELINE PRO ROUND 140

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering


Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	218 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base L x W x H	40 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		
Base Height	130 mm		

Article	Housing Color		Luminous Flux	Power	Price
731169	Light grey	www NW	2000/2200 lm	20.0 W	€ 259.95
731170	Dark grey	www NW	2000/2200 lm	20.0 W	€ 259.95
731171	White	www NW	2000/2200 lm	20.0 W	€ 259.95
731172	Light grey	www NW	3100/3400 lm	33.0 W	€ 299.95
731173	Dark grey	www NW	3100/3400 lm	33.0 W	€ 299.95
731174	White	www NW	3100/3400 lm	33.0 W	€ 299.95



Accessory

930869	Cover, 140, line, ShoreLine Pro Series, dark grey		€ 12.95
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey		€ 12.95
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome		€ 17.95
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome		€ 17.95
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome		€ 17.95
930874	Spacer for ShoreLine Pro series, light grey	****	€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey	****	€ 5.95
930880	Spacer for ShoreLine Pro series, white	****	€ 5.95

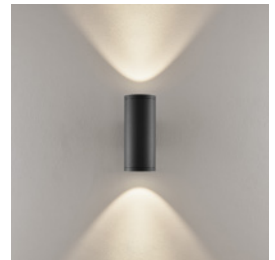

SHORELINE PRO ROUND UP+DOWN 140

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Height	332 mm	Light Beam Angle	36 Degree
Ø	140 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base L x W x H	40 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		
Base Height	130 mm		

Article	Housing Color	Luminous Flux	Power	Price
731175	Light grey	3100/3400 lm	31.0 W	€ 359.95
731176	Dark grey	3100/3400 lm	31.0 W	€ 359.95
731177	White	3100/3400 lm	31.0 W	€ 359.95
731178	Light grey	5100/5600 lm	54.0 W	€ 459.95
731179	Dark grey	5100/5600 lm	54.0 W	€ 459.95
731180	White	5100/5600 lm	54.0 W	€ 459.95



Accessory

930869	Cover, 140, line, ShoreLine Pro Series, dark grey		€ 12.95
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey		€ 12.95
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome		€ 17.95
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome		€ 17.95
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome		€ 17.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

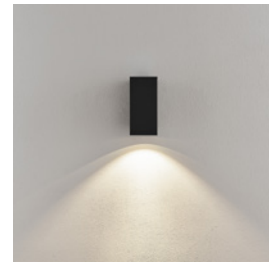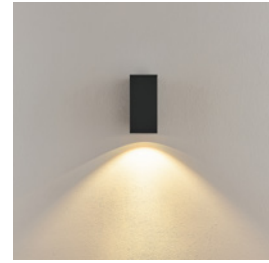

SHORELINE PRO SQUARE 70

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering


Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	6 W
Luminous Flux	480/550 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	150 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base L x W x H	43 x 55 x 130 mm	IK Protection Class	IK08
Base Width	55 mm		

Article	Housing Color	Price
731205	Light grey	€ 179.95
731206	Dark grey	€ 179.95
731207	White	€ 179.95



Accessory

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey		€ 7.95
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey		€ 7.95
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome		€ 7.95
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome		€ 7.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95



SHORELINE PRO SQUARE UP+DOWN 70


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	7.5 W
Luminous Flux	700/780 lm	Rated Input Voltage	220-240 V/AC
Length	70 mm	Power Supply Unit incl.	Yes
Width	70 mm	Light Beam Angle	30 Degree
Height	186 mm	Control	Trailing-edge dimmer
Base Length	43 mm	CRI (Ra)	90
Base L x W x H	43 x 55 x 130 mm	IK Protection Class	IK08
Base Width	55 mm		

Article	Housing Color		Price
731208	Light grey	WW NW	€ 209.95
731209	Dark grey	WW NW	€ 209.95
731210	White	WW NW	€ 209.95



Accessory

930980	Cover, 68/70, line, ShoreLine Pro Series, dark grey		€ 7.95
930981	Cover, 68/70, triangular, ShoreLine Pro Series, dark grey		€ 7.95
930878	Reflector, 68/70, ShoreLine Pro Series, 30 degrees, chrome		€ 7.95
930879	Reflector, 68/70, ShoreLine Pro Series, 60 degrees, chrome		€ 7.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

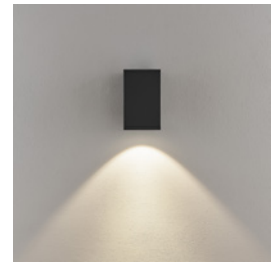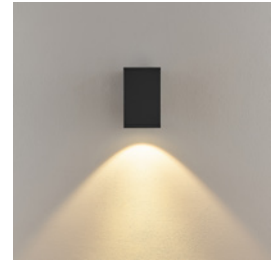

SHORELINE PRO SQUARE 100

- Light colour adjustable in 2 stages
- through-wiring possible
- Seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering


Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	12 W
Luminous Flux	900/1000 lm	Rated Input Voltage	220-240 V/AC
Length	100 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	163 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	90
Base L x W x H	40 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		

Article	Housing Color		Price
731202	Light grey	WW NW	€ 189.95
731203	Dark grey	WW NW	€ 189.95
731204	White	WW NW	€ 189.95



Accessory

930867	Cover, 100, line, ShoreLine Pro Series, dark grey		€ 9.95
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey		€ 9.95
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome		€ 14.95
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome		€ 14.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

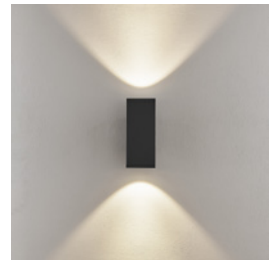

SHORELINE PRO SQUARE UP+DOWN 100


- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering



Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Power	21 W
Luminous Flux	1800/2000 lm	Rated Input Voltage	220-240 V/AC
Length	100 mm	Power Supply Unit incl.	Yes
Width	100 mm	Light Beam Angle	36 Degree
Height	238 mm	Control	Trailing-edge dimmer
Base Length	40 mm	CRI (Ra)	92
Base L x W x H	40 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		

Article	Housing Color		Price
731199	Light grey	WW NW	€ 259.95
731200	Dark grey	WW NW	€ 259.95
731201	White	WW NW	€ 259.95



Accessory

930867	Cover, 100, line, ShoreLine Pro Series, dark grey		€ 9.95
930868	Cover, 100, triangular, ShoreLine Pro Series, dark grey		€ 9.95
930875	Reflector, 100, ShoreLine Pro Series, 36 degrees, chrome		€ 14.95
930876	Reflector, 100, ShoreLine Pro Series, 60 degrees, chrome		€ 14.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95

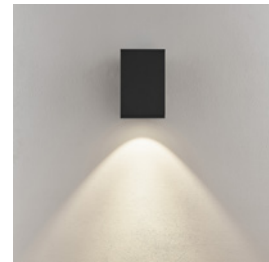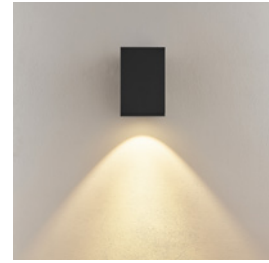

SHORELINE PRO SQUARE 140

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering


Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Length	140 mm	Power Supply Unit incl.	Yes
Width	140 mm	Light Beam Angle	36 Degree
Height	218 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	44.5 mm	CRI (Ra)	90
Base L x W x H	44.5 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		

Article	Housing Color		Luminous Flux	Power	Price
731181	Light grey		2000/2300 lm	20.5 W	€ 269.95
731182	Dark grey		2000/2300 lm	20.5 W	€ 269.95
731183	White		2000/2300 lm	20.5 W	€ 269.95
731184	Light grey		3100/3400 lm	33.0 W	€ 299.95
731185	Dark grey		3100/3400 lm	33.0 W	€ 299.95
731186	White		3100/3400 lm	33.0 W	€ 299.95



Accessory

930869	Cover, 140, line, ShoreLine Pro Series, dark grey		€ 12.95
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey		€ 12.95
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome		€ 17.95
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome		€ 17.95
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome		€ 17.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95



SHORELINE PRO SQUARE UP+DOWN 140

- light colour adjustable in 2 stages
- through-wiring possible
- seawater resistant
- separable mounting plate through plug connection
- angled fixing screw for better installation
- opt. Spacer for surface mounting
- opt. interchangeable reflector inserts / reflectors

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	130 mm
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Length	140 mm	Power Supply Unit incl.	Yes
Width	140 mm	Light Beam Angle	36 Degree
Height	332 mm	Control	Leading-edge dimmer, Trailing-edge dimmer
Base Length	44.5 mm	CRI (Ra)	90
Base L x W x H	44.5 x 80 x 130 mm	IK Protection Class	IK08
Base Width	80 mm		

Article	Housing Color		Luminous Flux	Power	Price
731187	Light grey	WW NW	3200/3400 lm	31.5 W	€ 369.95
731188	Dark grey	WW NW	3200/3400 lm	31.5 W	€ 369.95
731189	White	WW NW	3200/3400 lm	31.5 W	€ 369.95
731190	Light grey	WW NW	5400/5800 lm	55.0 W	€ 459.95
731191	Dark grey	WW NW	5400/5800 lm	55.0 W	€ 459.95
731192	White	WW NW	5400/5800 lm	55.0 W	€ 459.95



Accessory

930869	Cover, 140, line, ShoreLine Pro Series, dark grey		€ 12.95
930870	Cover, 140, triangular, ShoreLine Pro Series, dark grey		€ 12.95
930871	Reflector, 140, ShoreLine Pro Series, 24 degrees, chrome		€ 17.95
930872	Reflector, 140, ShoreLine Pro Series, 36 degrees, chrome		€ 17.95
930873	Reflector, 140, ShoreLine Pro Series, 60 degrees, chrome		€ 17.95
930874	Spacer for ShoreLine Pro series, light grey		€ 5.95
930877	Spacer for ShoreLine Pro series, dark grey		€ 5.95
930880	Spacer for ShoreLine Pro series, white		€ 5.95




ORTIS

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base L x W x H	100 x 77 x 67 mm
Colour Temperature	3000 K	Base Width	77 mm
Luminous Flux	510 lm	Base Height	67 mm
Length	260 mm	Power	15.9 W
Width	120 mm	Rated Input Voltage	220-240 V/AC
Height	181 mm	Power Supply Unit incl.	Yes
Ø	120 mm	Light Beam Angle	360 Degree
Base Length	100 mm	CRI (Ra)	80



731031

Article	Housing Color		Price
731031	Dark grey		€ 199.95






TUCANAE

- Modern minimalist design
- Powerful and energy saving
- Uniform illumination
- Adjustable brightness threshold and operating time [model-dependent]



Application Area


Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium	Base Width	135 mm
Colour Temperature	3000 K	Base Height	15 mm
Luminous Flux	2150 lm	Power	18 W
Length	140 mm	Rated Input Voltage	110-240 V/AC
Width	172 mm	Power Supply Unit incl.	Yes
Height	219 mm	Light Beam Angle	110 Degree
Base Length	125 mm	CRI (Ra)	80
Base L x W x H	125 x 135 x 15 mm		



731133

Article	Housing Color	IP Protection Type	Motion Detector	Price
731133	■ Dark grey 	IP 54	Yes	€ 198.95
731144	■ Dark grey 	IP 65	No	€ 185.95





Accessory

180512 BASIC, CC, CC35018/18 W



€ 23.95



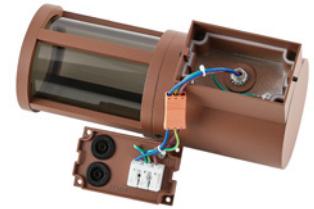

FACADO 2 ROUND

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination


Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Length	144 mm	Control	Dimmable via optional light source
Height	261.5 mm	IK Protection Class	IK05
Ø	108 mm		

Article	Housing Color	Colour of Light Output	Price
731153	 Dark grey	Smoke-coloured	€ 124.95
731155	 Rust	Smoke-coloured	€ 124.95
731154	 Dark grey	White	€ 124.95
731156	 Rust	White	€ 124.95





FACADO 2 SQUARE

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- IP65 weather resistance
- Newly designed lamp head for improved illumination

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living, Hotel / catering

Housing	Aluminium, Polycarbonate	Max. Power	1x max. 20 W
Surface	Matt	Rated Input Voltage	220-240 V/AC
Length	148 mm	Control	Dimmable via optional light source
Width	108 mm	IK Protection Class	IK05
Height	261.5 mm		

Article	Housing Color	Colour of Light Output	Price
731151	■ Dark grey	Smoke-coloured	€ 124.95
731157	■ Dark grey	White	€ 124.95





ACHERNAR

·Exchangeable lamp GU10 [retrofit]


Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	49 mm
Length	108 mm	Max. Power	1x max. 50 W
Height	95 mm	Rated Input Voltage	220-240 V/AC
Ø	63 mm	Control	Dimmable via optional light source
Base Length	58 mm		

Article	Housing Color	Price
731130	Black	€ 36.95
731228	White	€ 36.95
731229	Light grey	€ 36.95
731230	Dark grey	€ 36.95





ACHERNAR UP + DOWN

· Exchangeable lamp GU10 [retrofit]


Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	49 mm
Length	158 mm	Max. Power	2x max. 35 W
Height	95 mm	Rated Input Voltage	220-240 V/AC
Ø	63 mm	Control	Dimmable via optional light source
Base Length	58 mm		

Article	Housing Color	Price
731131	■ Black	€ 44.95
731231	□ White	€ 44.95
731232	■ Light grey	€ 44.95
731233	■ Dark grey	€ 44.95






CUBODO 2

Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	108 mm
Colour Temperature	3000 K	Power	8.5 W
Luminous Flux	600 lm	Rated Input Voltage	220-240 V/AC
Length	108 mm	Power Supply Unit incl.	Yes
Width	108 mm	Light Beam Angle	19 Degree
Height	115 mm	CRI (Ra)	80
Base Length	108 mm	IK Protection Class	IK04



731026

Article	Housing Color		Price
731024	Dark grey		€ 159.95
731025	Light grey		€ 159.95
731026	White		€ 159.95



CUBODO 2 UP + DOWN


Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power	16 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1300 lm	Power Supply Unit incl.	Yes
Length	108 mm	Light Beam Angle	19 Degree
Width	108 mm	Light Beam Angle 2	19 Degree
Height	115 mm	CRI (Ra)	80
Base Length	108 mm	IK Protection Class	IK04
Base Width	108 mm		

Article	Housing Color		Price
731015	Dark grey		€ 179.95
731019	Light grey		€ 179.95
731020	White		€ 179.95






CUBODO 2 MINI

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	65 mm
Colour Temperature	3000 K	Base Height	20 mm
Luminous Flux	220 lm	Power	5 W
Length	90 mm	Rated Input Voltage	220-240 V/AC
Width	68 mm	Power Supply Unit incl.	Yes
Height	70 mm	Light Beam Angle	46 Degree
Base Length	65 mm	CRI (Ra)	77
Base L x W x H	65 x 65 x 20 mm		



731029

Article	Housing Color		Price
---------	---------------	--	-------

731029 Dark grey **€ 119.95**



CUBODO 2 MINI UP + DOWN


Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Base Width	65 mm
Colour Temperature	3000 K	Base Height	20 mm
Luminous Flux	440 lm	Power	9.9 W
Length	90 mm	Rated Input Voltage	220-240 V/AC
Width	68 mm	Power Supply Unit incl.	Yes
Height	108 mm	Light Beam Angle	46 Degree
Base Length	65 mm	CRI (Ra)	77
Base L x W x H	65 x 65 x 20 mm		

Article	Housing Color		Price
---------	---------------	--	-------

731030 Dark grey **€ 149.95**





CAN IP65

The CAN IP65 surface-mounted wall light is a robust and versatile solution for outdoor areas. Available as a classic wall light and as an up/down variant with light emission on both sides, it is ideal for demanding environments. The IP65 certification guarantees protection against dust and water. The widely used GU10 base enables quick and simple replacement of the lamp. Push terminals for rigid and flexible conductors facilitate simple installation. The CAN outdoor light is part of a versatile series and is also available as a pendant, ceiling, wall and reading light.



page



page



page



page



CAN IP65


- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive product family of the CAN series

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Max. Power	1x max. 7.5 W
Length	87 mm	Rated Input Voltage	220-240 V/AC
Height	108 mm	Control	Dimmable via optional light source
Ø	80 mm		

Article	Housing Color	Price
731223	<input type="checkbox"/> White	€ 59.95
731224	<input checked="" type="checkbox"/> Black	€ 59.95



CAN UP + DOWN IP65


- Replaceable lamp to offer an individual lighting solution
- Can be combined with the comprehensive product family of the CAN series

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Max. Power	2x max. 7.5 W
Length	87 mm	Rated Input Voltage	220-240 V/AC
Height	212 mm	Control	Dimmable via optional light source
Ø	80 mm		

Article	Housing Color	Price
731225	<input type="checkbox"/> White	€ 89.95
731226	<input checked="" type="checkbox"/> Black	€ 89.95





JABBAH

The square JABBAH uses integrated COB LEDs in warm white, emitting its light asymmetrically at an angle of 75° onto walls in a cone of illumination - in a simple variant providing 915 lumens, as an UP AND DOWN version providing a total of 1,850 lumens. In addition, the two-sided JABBAH can be dimmed to 60 % luminous flux using a dip switch, if a more subtle light is desired.






JABBAH

- Feed-through wiring possible
- Mounting plate can be disconnected via plug
- Quick and secure installation
- Incl. wall spacer for surface-mounted cable entry
- Power adjustable in 2 stages (model-dependent)



Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Power Selectable	13 W, 25 W
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	1850 lm	Power Supply Unit incl.	Yes
Length	150 mm	Light Beam Angle	75 Degree
Width	150 mm	CRI (Ra)	80
Height	150 mm		



731127

Article	Housing Color		Price
731127	 Dark grey		€ 345.95



Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.






ARCTURUS

- Continuously adjustable light emission angle 0-90°
- Uplight and downlight separately adjustable
- Ideal for customised lighting accents

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering



Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	90 Degree
Power	6 W	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC		



731099

Article	Housing Color		Luminous Flux	Length	Width	Height	Base Length	Price
731099	Dark grey	ww	200 lm	110 mm	79 mm	172 mm	68 mm	€ 109.95
731100	Dark grey	ww	208 lm	105 mm	140 mm	145 mm	75 mm	€ 109.95



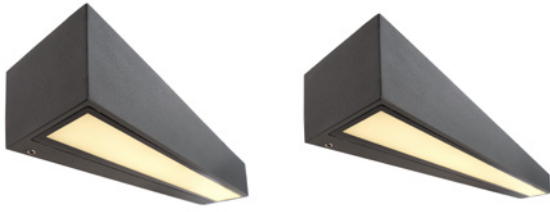


LINEAR

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering

Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Width	53 mm	CRI (Ra)	80



731135

Article	Housing Color	Luminous Flux	Length	Base Length	Base L x W x H	Power	EEL	Price
731135	Dark grey	600 lm	250 mm	242 mm	242 x 53 x 15 mm	8.0 W	G	€ 149.95
731134	Dark grey	1230 lm	500 mm	493 mm	493 x 53 x 15 mm	14.0 W	F	€ 194.95




LINEAR UP + DOWN

Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Park / public outdoor area, Hotel / catering


Housing	Aluminium	Base Height	15 mm
Colour Temperature	3000 K	Rated Input Voltage	220-240 V/AC
Width	60 mm	Power Supply Unit incl.	Yes
Height	60 mm	Light Beam Angle	100 Degree
Base Width	53 mm	CRI (Ra)	80



731129

Article	Housing Color	Luminous Flux	Length	Base Length	Base L x W x H	Power	Price
731136	Dark grey	1155 lm	250 mm	242 mm	242 x 53 x 15 mm	14.0 W	€ 184.95
731129	Dark grey	1760 lm	500 mm	493 mm	493 x 53 x 15 mm	20.0 W	€ 214.95



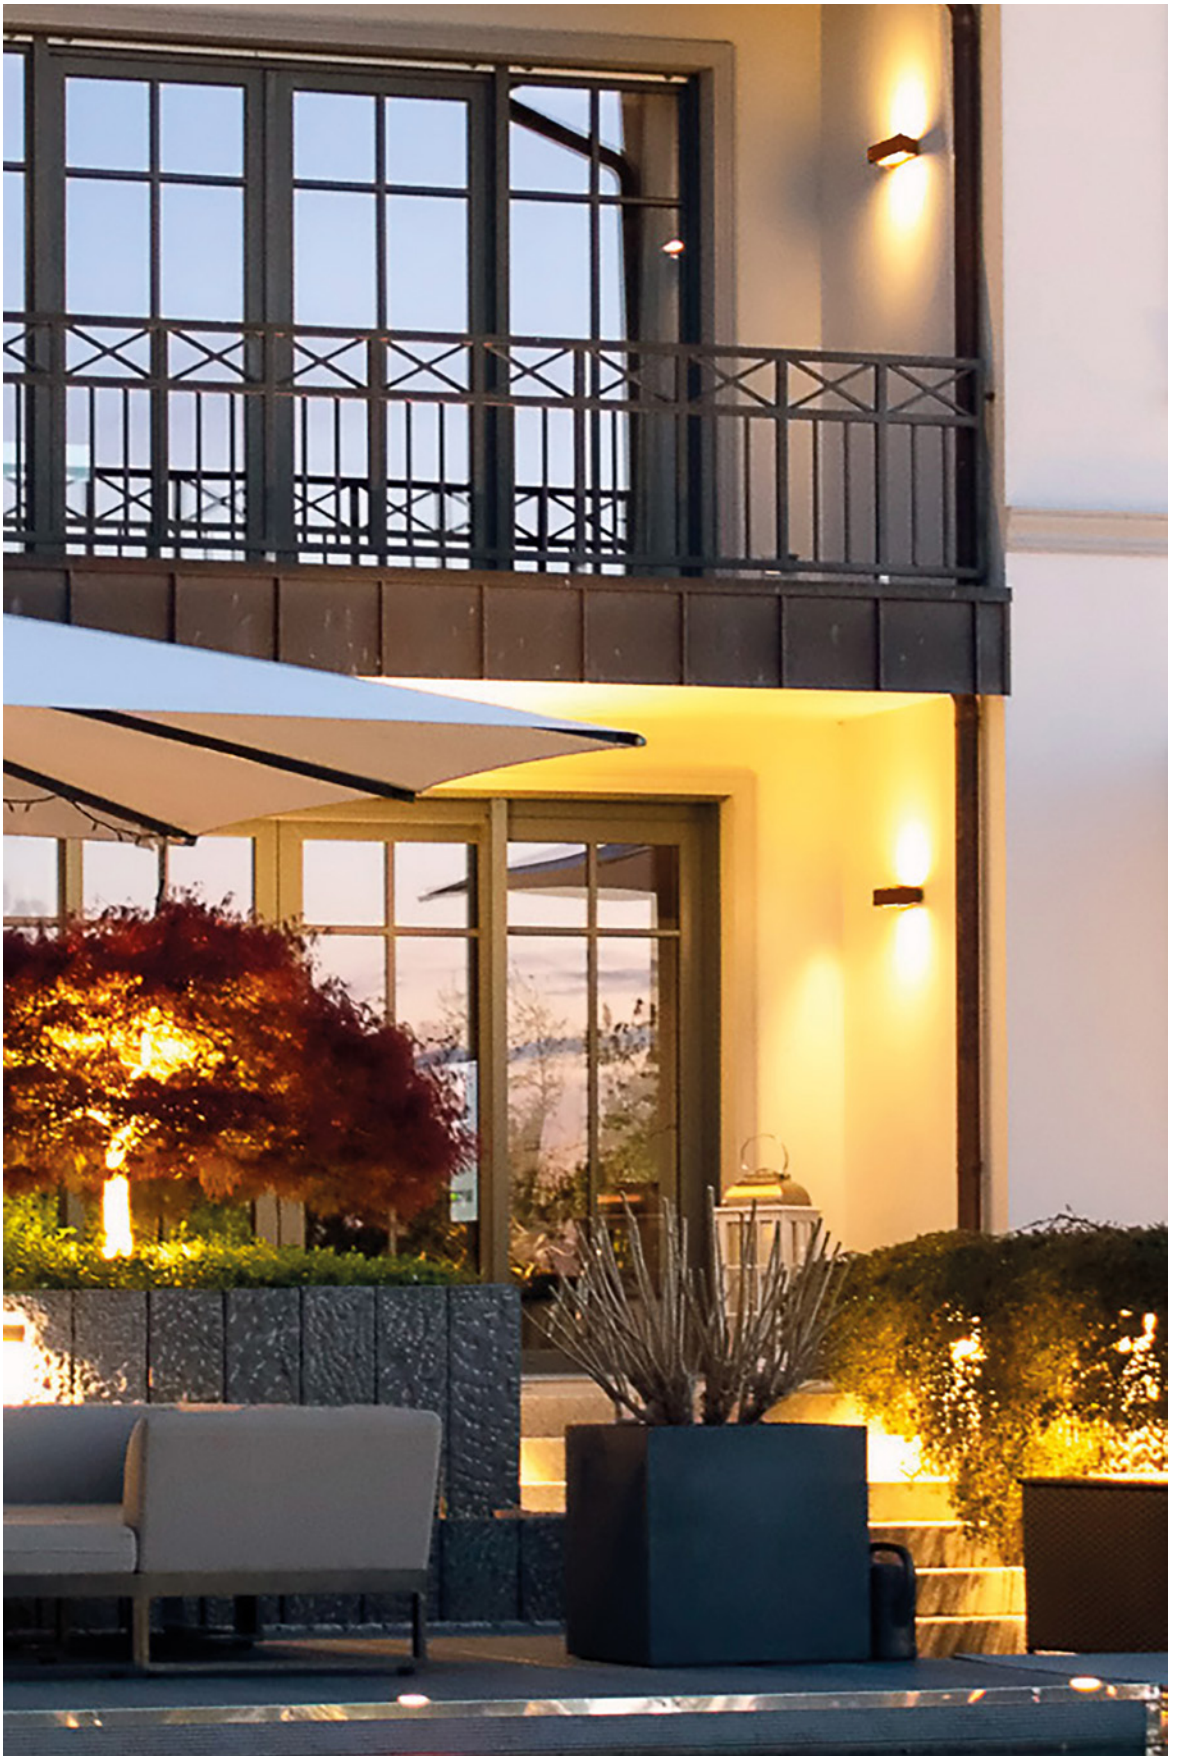




RILONGO

The RILONGO surface-mounted wall light impresses with its modern, simple design and stylishly sets the scene for facades, entrance areas and patios. The light emission on both sides creates effective lighting accents on the wall, providing both orientation and a pleasant atmosphere.

Made from robust die-cast aluminium and equipped with an IP54 protection rating, the light is ideal for permanent outdoor use. The E27 socket allows a free choice of light source up to max. 15 W and therefore offers flexible options for light colour and lighting mood.

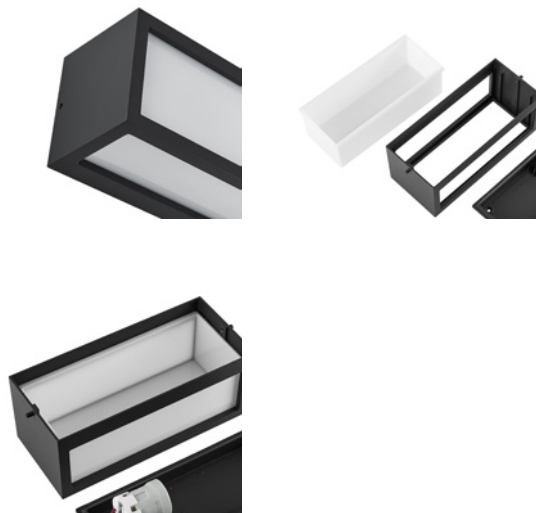



RILONGO

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living

Housing	Aluminium	Control	Dimmable via optional light source
Length	250 mm	IK Protection Class	IK05
Width	110 mm	Colour of Light Output	White
Max. Power	1x max. 15 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	light emission	Height	Price
730330	Dark grey	top / bottom	103 mm	€ 79.95
731060	Dark grey	top / bottom / front [grille]	110 mm	€ 79.95
731227	Dark grey	top / bottom / front	110 mm	€ 79.95



Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.



ALKES

The ALKES series is not a traditional wall-mounted light, but, with its SMD-LED panel, has floodlight similarities. The highlight: the upper housing part is tilted forwards 45° from the façade to direct the warm white light in a targeted manner onto the surface to be illuminated. In addition, the ALKES also looks great when switched off with its modern design and rounded edges.




ALKES

- high luminous efficacy
- homogeneous light distribution





Application Area


Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	110 Degree
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80



731138

Article	Housing Color	Luminous Flux	Length	Width	Height	Power	Price
731138	Dark grey 	 920 lm	200 mm	126 mm	184 mm	21.0 W	€ 104.95
731140	Dark grey 	 1720 lm	297 mm	165 mm	240 mm	36.0 W	€ 175.95




ALKES MOTION

- high luminous efficacy
- homogeneous light distribution





Application Area

Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Hotel / catering

Housing	Aluminium	Light Beam Angle	110 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Motion Detector	Yes
Power Supply Unit incl.	Yes		



731139

Article	Housing Color	Luminous Flux	Length	Width	Height	Power	Price
731139	Dark grey 	 735 lm	200 mm	126 mm	184 mm	21.0 W	€ 124.95
731141	Dark grey 	 1720 lm	297 mm	165 mm	240 mm	36.0 W	€ 195.95





GRUMIUM SQUARE CCT

Modular, compact, impactful - the GRUMIUM wall-mounted light can be installed on patios, building walls or in entrances to living spaces and, due to its optional covers in different designs, provides a flexible universal solution for many areas of application. The permanently installed and energy-saving LEDs delivering max. 10 watts are encompassed by a diffuser made of milky plastic and produce a pleasant warm-white light with a luminous flux of 730 lm. The Grumium outdoor light with die-cast aluminium housing comes in an angular and rounded design and has degree of protection IP54.













GRUMIUM SQUARE CCT


· light colour adjustable in 2 stages

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door, Home / Living


Housing	Aluminium	Base Width	15 mm
Colour Temperature	3000/4000 K	Base Height	195 mm
Length	100 mm	Power	10 W
Width	70 mm	Rated Input Voltage	220-240 V/AC
Height	200 mm	Power Supply Unit incl.	Yes
Base Length	95 mm	CRI (Ra)	80
Base L x W x H	95 x 15 x 195 mm		

Article	Housing Color	Luminous Flux	Light Beam Angle	Light Direction	Price
620124	Dark grey  	205 lm	138 Degree	Top / Below / Side	€ 114.95
620125	Dark grey  	280 lm	138 Degree	Top / Below / Side	€ 114.95
620126	Dark grey  	300 lm	180 Degree	Top / Below / Side	€ 114.95
620127	Dark grey  	440 lm	150 Degree	Side	€ 114.95
620123	Dark grey  	450 lm	138 Degree	Top / Below / Side	€ 114.95



5-year guarantee

Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.

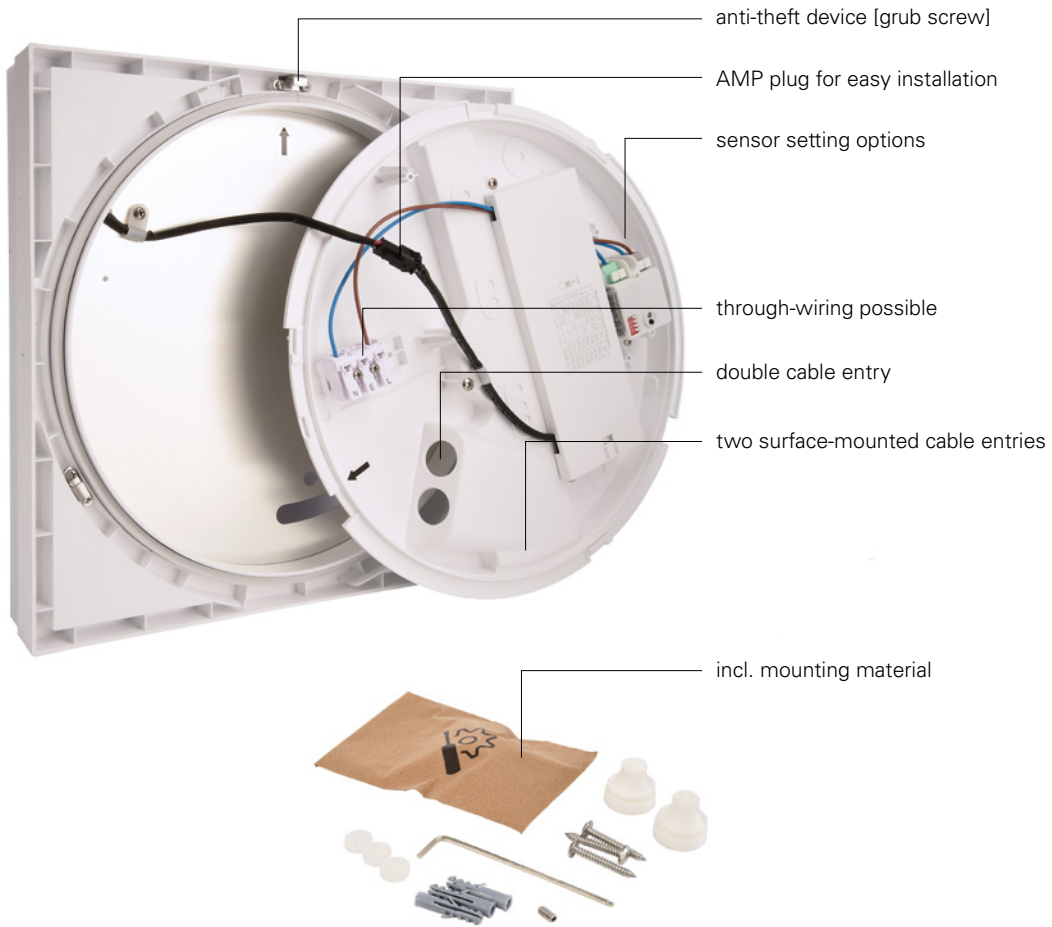


CASA

The CASA house number light has space for up to four digits and/or letters each 10 cm high, ensuring house numbers can be easily read. With a configurable twilight switch, the wall light automatically adjusts to the ambient brightness. The light colour can also be adjusted in two stages (3,000 K/4,000 K).

Multiple cable entries and the option of feed-through wiring mean that installation is simple and flexible. Anti-theft protection also prevents unauthorised removal.

Note: Stickers for numbers/letters are optionally available





CASA


- Space for four digits and letters each 10 cm high
- Adjustable daylight sensor
- Adjustable light colour 3,000/4,000 K
- Multiple cable entries incl. feed-through wiring
- Easy and quick mounting with anti-theft protection
- Set of number/letter stickers optionally available

Application Area

Reception / Communication, Garden / Terrace / Balcony / Walkways, Garage / carport / car park

Surface	Matt	Power	3 W
Colour Temperature	3000/4000 K	Rated Input Voltage	200-240 V/AC
Length	275 mm	Power Supply Unit incl.	Yes
Width	275 mm	Light Beam Angle	120 Degree
Height	64 mm	CRI (Ra)	80
Base Height	14 mm	Light Direction	Front
Base H x Ø	14 x 245 mm	IK Protection Class	IK08
Base Ø	245 mm		

Article	Housing Color	Luminous Flux Housing	Price
731159	Black WW NW	250/260 lm PP - Polypropylene	€ 109.95
731158	White WW NW	270/280 lm Polycarbonate	€ 109.95



Accessory

930807 Numbers set 0-9 for Casa

930808 Letters set A-F for Casa



€ 10.95

€ 6.95



□ ■ ■
page 74





■
page 76




■
page 77

Surface mounted ceiling and



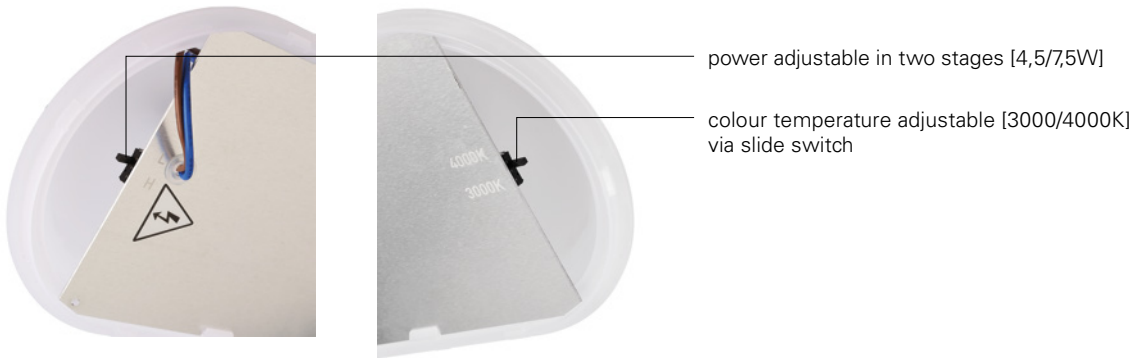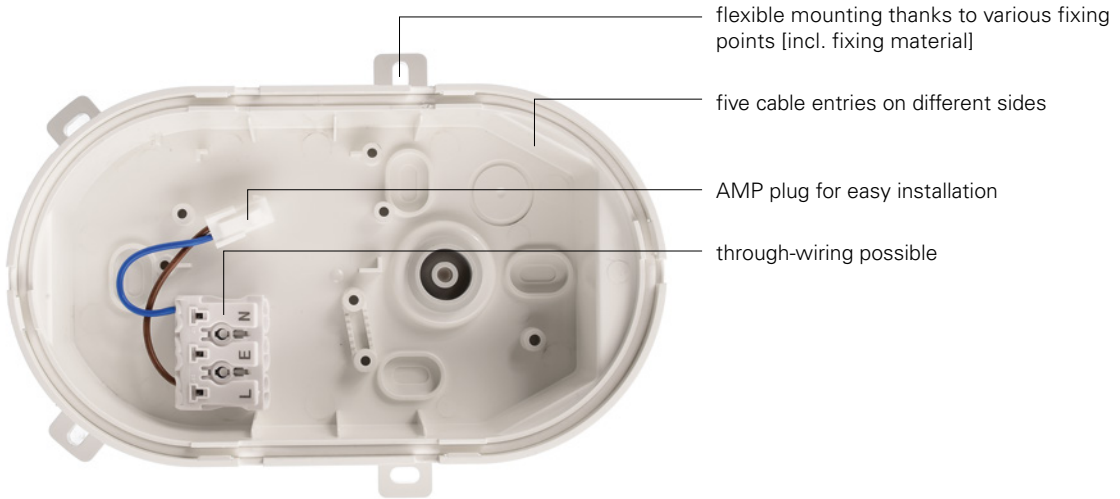



SOTANO

- Classic cellar light with modern LED technology
- Colour temperature adjustable (3,000/4,000 K) via slide switch
- Output adjustable in two stages (4.5/7.5 W) via slide switch
- Six cable entry points on multiple sides
- Flexible installation

Application Area

Garage / carport / car park, Workshop / Craft / Warehouse, Basement / damp room, Multi-storey car park / underground car park, Refurbishment

Housing	Polycarbonate	Power Selectable	4.5 W, 7.5 W
Colour Temperature	3000/4000 K	Rated Input Voltage	220-240 V/AC
Luminous Flux	450/750 lm	Power Supply Unit incl.	Yes
Length	165 mm	Light Beam Angle	120 Degree
Width	120 mm	IK Protection Class	IK08
Height	65 mm		


Article	Housing Color		Price
731160	<input type="checkbox"/> White	<input type="checkbox"/> WW <input type="checkbox"/> NW	€ 16.95
731161	<input type="checkbox"/> Grey	<input type="checkbox"/> WW <input type="checkbox"/> NW	€ 16.95
731162	<input type="checkbox"/> Black	<input type="checkbox"/> WW <input type="checkbox"/> NW	€ 16.95







MOB

Housing	Aluminium	Max. Power	1x max. 9 W
Height	92 mm	Rated Input Voltage	220-240 V/AC
Ø	108 mm	Control	Dimmable via optional light source
Base Ø	100 mm		

Article	Housing Color	Price
730408	 Dark grey	€ 72.95



Accessory

180195	LED, GX53, 230 V/AC, 4,000 K, 120 degrees		€ 21.95
180196	LED, GX53, 230 V/AC, 3,000 K, 120 degrees		€ 21.95





MENSAE

- Corridor function
- Adjustable motion detector [hold time / detection area]
- Daylight sensor

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, House wall / facade / front door

Housing	Aluminium	Power	16 W
Colour Temperature	3000 K	Rated Input Voltage	100-240 V/AC
Height	54 mm	Power Supply Unit incl.	Yes
Base Height	28.5 mm	CRI (Ra)	80
Base H x Ø	28.5 x 170 mm	Motion Detector	Yes
Base Ø	170 mm	IK Protection Class	IK08

Article	Housing Color		Luminous Flux	Length	Width	Ø	Light Beam Angle	Price
348071	■ Dark grey	ww	1400 lm	300 mm	300 mm		115 Degree	€ 249.95
348072	■ Dark grey	ww	1500 lm			300 mm	110 Degree	€ 249.95





□
page 80

Spherical lights





DORADUS

Light in its most beautiful form - the sphere is and remains one of the most striking of shapes. With the opportunity to illuminate it from within, what could be better. The spherical light looks great both indoors and outdoors. Using a dimmable LED lamp with RGB or colour change function achieves the optimal effect. Be mesmerised with cosy red, calming green and deep blue. With a warm white lamp too, the light emanating from this spherical light is something rather special.



DORADUS


- Spherical housing with IP65 protection
- Resistant to sea water
- Ready to use with 3 m connecting cable
- Incl. ground spike

Application Area

Garden / Terrace / Balcony / Walkways, Hotel / catering

Housing	Polyethylene	Primary Connection End	Power plug IP44
Max. Power	1x max. 23 W	Control	Dimmable via optional light source
Rated Input Voltage	220-240 V/AC	IP Protection Type Plug	IP 44
Primary Cable Length	3 m		

Article	Housing Color	Height	Ø	Price
836011	<input type="checkbox"/> White	230 mm	250 mm	€ 139.95
836930	<input type="checkbox"/> White	350 mm	380 mm	€ 169.95
836014	<input type="checkbox"/> White	420 mm	450 mm	€ 199.95
836931	<input type="checkbox"/> White	530 mm	560 mm	€ 319.95




Accessory

843533	RF-smart, E27, Zigbee, 6 W, RGB+2700-6500 K, 220 Grad		€ 46.95
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 49.95
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT		€ 69.95
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 109.95
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT		€ 74.95

Accessories for 836931

843534	RF-smart, E27, Zigbee, 12 W, RGB+2700-6500 K, 220 Grad		€ 64.95
---------------	--	--	---------



Energy distributor



■
page 84



■
page 86



■
page 88






ARAWAN

Sometimes it's about more than just light. With our multiple socket tower, available with or without light, another gap in our range is filled. Design your garden even more flexibly, in proven DEKO-LIGHT quality of course and at a price that won't break the bank.





ARAWAN

- Safe power distribution outdoors
- Total load max. 3,680 W
- Outlets and lights can be switched on separately
- Connection box with IP67 and accessories including in scope of delivery
- Feed-through wiring possible

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Ø	100 mm	Primary Connection End	Connection box IP67
Connected Load max.	3680 W		

Article	Housing Color	Colour Temperature	Luminous Flux	Height	Power	Power Supply incl.	EEI	Price
733055	Dark grey			400 mm				€ 119.95
733054	Dark grey	3000 K	150 lm	478 mm	4.8 W	Yes		€ 169.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68




€ 2.10



PUKA MANA

A garden is pure nature and yet needs power in several different places. With the PUKA MANA, you can flexibly access power to operate lawnmowers and other gardening tools or simply to charge your e-bike or smartphone. The multiple socket tower has two socket outlets and can be installed particularly easily using our multi-outdoor cable connectors. The sophisticated cable routing ensures a clean visual design.





PUKA MANA

- Door can be completely closed when angled plugs are plugged in
- Total load: max. 3,680 W
- Easy to install thanks to IP68 cable connector
- Light can be switched on separately [only art. no. 733067]

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Connected Load max.	3680 W
Length	100 mm	Rated Input Voltage	220-240 V/AC
Width	100 mm	Primary Connection End	Connection box IP67


Article	Housing Color	Height	Socket / Base	Max. Power	IK Protection Class	Price
733066	Dark grey	420 mm			IK10	€ 169.95
733067	Dark grey	620 mm	E27	1x max. 13.0 W		€ 119.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68  **€ 2.10**

Accessories for **733066**


931073 Cover for Multiple socket tower Puka Mana 420 mm  **€ 9.95**



LERNA

LERNA series power distributors offer a number of advantages. With two sockets and a total load of 3,680 W, they allow you to connect various devices while providing reliable lighting. Light and sockets can be switched separately (separate L+N). The socket cover latches open for additional convenience. The ability to adjust the light colour in two stages (3,000 K/4,000 K) allows you to choose the colour temperature that sets the perfect ambience. The downward orientation of the lighting also fully guarantees efficient illumination without creating light pollution. LERNA series bollard lights are available in two different sizes (600 mm and 1,000 mm). With a output of 7,4 W and 256 lm, the light itself is incredibly bright.





LERNA

- Socket cover latches open
- Total socket output: 3,680 W
- Light colour adjustable in two stages
- Light and socket can be switched separately (separate L+N)
- Light directed fully downwards to prevent light pollution

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Rated Input Voltage	200-240 V/AC
Colour Temperature	3000/4000 K	Power Supply Unit incl.	Yes
Luminous Flux	237/256 lm	Light Beam Angle	50 Degree
Length	120 mm	Light Beam Angle 2	100 Degree
Width	100 mm	CRI (Ra)	80
Power	7.4 W	IK Protection Class	IK06
Connected Load max.	3680 W		

Article	Housing Color		Height	Price
733071	Dark grey	WW NW	600 mm	€ 269.95
733070	Dark grey	WW NW	1000 mm	€ 309.95



Accessory

931098 Cable gland PG/M20 incl. locknut + sealing ring, IP68



€ 2.10



■
page 92



■ ■
page 94



■
page 95



■
page 96



■
page 97



■
page 98

Surface mounted / ground spike



**DEKO-LIGHT RF-SMART SPOTLIGHT
RGB+CCT RF + ZIGBEE**

The RF-Smart SPOT spotlight with ground spike offers dimmable brightness and colour saturation, 16 million colours and adjustable colour temperatures. This spotlight has eight pre-installed automatic programs and the ability to synchronise with other RF-Smart components, offering maximum flexibility. Can be controlled using RF-smart wireless remote controls (2.4 GHz, range approx. 30 m, not in scope of delivery) as well as all Zigbee 3.0 compatible controllers and apps such as Amazon Echo (Alexa), Google Assistant and Tuya (appropriate gateway required). The very narrow beam angle makes it ideal for column lighting and similar applications.





DEKO-LIGHT RF-SMART SPOTLIGHT RGB+CCT RF + ZIGBEE

- Adjustable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 automatic programmes pre-installed
- Program and remote control synchronisation when operating multiple RF smart components (repeater function)
- Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)
- Very narrow light emission angle, perfect for column lighting or similar

Application Area

Object lighting / architecture, Garage / carport / car park


Housing	Aluminium, Plastic	Control	RF-Smart, ZigBee 3.0
Colour Temperature	2700-6500 K	Primary Cable Length	1.5 m
Rated Input Voltage	100-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	15 Degree	IP Protection Type Plug	IP 44
Swivelling Angle	355 Degree		

Article	Housing Color	Luminous Flux	Length	Width	Height	Power	Price
843539	Anthracite	900 lm	72 mm	131 mm	135 mm	9.0 W	€ 139.95
843521	Anthracite	2200 lm	65 mm	170 mm	180 mm	25.0 W	€ 239.95



Accessories for 843521

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 49.95
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT		€ 69.95
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 109.95
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT		€ 74.95
930659	Wall bracket/display arm, metal, black, length: 800 mm		€ 59.95



SPIKY

- Replaceable GU10 lamp (retrofit)
- Incl. 2 m connecting cable with IP44 plug
- Incl. ground spike
- Incl. cover (art. no. 732161 only)

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium, Plastic	Control	Dimmable via optional light source
Surface	Matt	Swivelling Angle	180 Degree
Max. Power	1x max. 35 W	IP Protection Type Plug	IP 44
Rated Input Voltage	220-240 V/AC		
Primary Connection End	Power plug		

Article	Housing Color	Height	Ø	Primary Cable Length	Price
732161	Black	345 mm	100 mm	2.5 m	€ 34.95
732160	Dark grey	420 mm	60 mm	2 m	€ 39.95



Accessory

843532	RF-smart, GU10, Zigbee, 4 W, RGB+2700-6500 K, 25 Degree		€ 46.95
843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20		€ 38.95
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 49.95
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT		€ 69.95
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT		€ 74.95
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT		€ 109.95



KEID

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Home / Living, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Length	120 mm	Swivelling Angle	180 Degree
Height	457 mm	Primary Cable Length	0.5 m
Ø	75 mm	Primary Connection End	Connection box IP65
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80

Article	Housing Color		Luminous Flux	Power	Price
732094	■ Dark grey	ww	800 lm	10.3 W	€ 139.95
732095	■ Dark grey	ww	1350 lm	21.5 W	€ 149.95






COLT 8 W COB + 8 W RGBW

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible

Application Area

Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	50 mm
Colour Temperature	3000 K	Base H x Ø	50 x 96 mm
Length	66 mm	Base Ø	96 mm
Height	185 mm	Swivelling Angle	180 Degree
Ø	77 mm		



732108

Article	Housing Color	Luminous Flux	Power	Rated Input Voltage	Rated Input Voltage	Power Supply incl.	Price
732127	Dark grey	340 lm	8.6 W	24 V/DC		No	€ 299.95
732108	Dark grey	470 lm	7.0 W		220-240 V/AC	Yes	€ 199.95



Accessory

930441	Surface-mounted housing for Colt 8 W series, black		€ 59.95
930426	Ground spike for Colt series 4/8 W, M5, black		€ 9.95

Accessories for 732108

930431	12° reflector for Colt 8 W series		€ 8.95
930432	22° reflector for Colt 8 W series		€ 8.95
930587	Connecting cable with 230 V power plug		€ 19.95

Accessories for 732127

862122	FLAT, CV, UT 24 V/50 W		€ 52.95
862230	OCTO, CV, Mini 24 V/12 W		€ 21.95
872083	IP, CV, V6-40-24		€ 74.95




COLT 15 W COB + 16 W RGB

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible

Application Area


Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	56 mm
Colour Temperature	3000 K	Base H x Ø	56 x 120 mm
Length	88 mm	Base Ø	120 mm
Height	220 mm	Swivelling Angle	180 Degree
Ø	110 mm		



732109

Article	Housing Color	Luminous Flux	Power	Rated Input Voltage	Rated Input Voltage	Power Supply incl.	Price
732128	Dark grey	780 lm	16.0 W	24 V/DC		No	€ 449.95
732109	Dark grey	1090 lm	14.0 W		220-240 V/AC	Yes	€ 249.95



Accessory

- 930442** Surface-mounted housing for Colt 15/30 W series, black € 69.95
- 930427** Ground spike for Colt series 15/25/30/36/65 W, M10, black € 11.95

Accessories for 732109

- 930434** 12° reflector for Colt 15 W series € 10.95
- 930435** 22° reflector for Colt 15 W series € 11.95
- 930587** Connecting cable with 230 V power plug € 19.95

Accessories for 732128

- 862122** FLAT, CV, UT 24 V/50 W € 52.95
- 862164** BASIC, CV, Q8H-24-75 W € 74.95
- 872083** IP, CV, V6-40-24 € 74.95
- 872085** IP, CV, V6-75-24 € 94.95
- 930426** Ground spike for Colt series 4/8 W, M5, black € 9.95




COLT 30 W COB + 25 W RGBW

- Replaceable reflectors
- Including clear/frosted glass pane
- Including honeycomb filter
- Feed-through wiring possible

Application Area

Object lighting / architecture, Garage / carport / car park, Reception / Communication

Housing	Aluminium	Base Height	56 mm
Colour Temperature	3000 K	Base H x Ø	56 x 120 mm
Length	112 mm	Base Ø	120 mm
Height	260 mm	Swivelling Angle	180 Degree
Ø	131 mm		



732110

Article	Housing Color	Luminous Flux	Power	Rated Input Voltage	Rated Input Voltage	Power Supply incl.	Price
732129	Dark grey	RGB WW	1140 lm	25.0 W	24 V/DC	No	€ 499.95
732110	Dark grey	WW	2320 lm	29.0 W	220-240 V/AC	Yes	€ 289.95



Accessory

- 930442** Surface-mounted housing for Colt 15/30 W series, black € 69.95
- 930427** Ground spike for Colt series 15/25/30/36/65 W, M10, black € 11.95


Accessories for 732110

- 930437** 12° reflector for Colt 30 W series € 12.95
- 930438** 22° reflector for Colt 30 W series € 12.95
- 930587** Connecting cable with 230 V power plug € 19.95

Accessories for 732129

- 862163** BASIC, CV, Q8H-24-40 W € 46.95
- 862164** BASIC, CV, Q8H-24-75 W € 74.95
- 872083** IP, CV, V6-40-24 € 74.95
- 872085** IP, CV, V6-75-24 € 94.95
- 872094** IP, CV, V6-100-24 € 114.95





■
page 102



■
page 103

Wall washer







WALLWASHER CAPH 24 V


- Including 0.5 m connecting cable with WEIPU plug
- Including 0.5 m connecting cable with WEIPU plug

Application Area

Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting

Housing	Aluminium	Power Supply Unit incl.	No
Colour Temperature	3000 K	Control	Dimmable via optional controller
Length	1000 mm	Primary Cable Length	0.5 m
Width	53.36 mm	Primary Connection End	WEIPU plug 5-pole
Height	81.07 mm	CRI (Ra)	80
Power	60 W		
Rated Input Voltage	24 V/DC		

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732072	Dark grey		2480 lm	40 Degree	15 Degree	Asymmetric	€ 415.95
732071	Dark grey		2800 lm	25 Degree		Symmetric	€ 415.95



Accessory

862164	BASIC, CV, Q8H-24-75 W		€ 74.95
872085	IP, CV, V6-75-24		€ 94.95
843502	RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20		€ 99.95




WALLWASHER CAPH 230V

·Including 2 m connecting cable with IP44 shaped plug

Application Area

Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Garage / carport / car park, House wall / facade / front door, Advertising lighting


Housing	Aluminium	Rated Input Voltage	220-240 V/AC
Colour Temperature	3000 K	Power Supply Unit incl.	Yes
Length	1000 mm	Primary Cable Length	2 m
Width	53.36 mm	Primary Connection End	Power plug IP44
Height	81.07 mm	CRI (Ra)	80
Power	38 W	IP Protection Type Plug	IP 44



732080

Article	Housing Color		Luminous Flux	Light Beam Angle	Light Beam Angle 2	Light Distribution	Price
732080	■ Dark grey		2580 lm	40 Degree	15 Degree	Asymmetric	€ 415.95
732079	■ Dark grey		3000 lm	25 Degree		Symmetric	€ 415.95





Ground recessed lights




□
page 106



□
page 107



□
page 108



□
page 108



■
page 109



□
page 110



□
page 112



□
page 113



□
page 114



□
page 115



□
page 116



□
page 117



□
page 119



□
page 119



ATON


Application Area

Garden / Terrace / Balcony / Walkways

Height	111 mm	Cut Out Ø	70 mm
Installation Depth	148 mm	Control	Dimmable via optional light source
Max. Power	1x max. 7 W		
Rated Input Voltage	220-240 V/AC		

Article	Housing Color	Housing	Length	Width	Ø	IK Protection Class	Price
730474	<input type="checkbox"/> Silver	Stainless steel			97 mm	IK08	€ 56.95
730475	<input type="checkbox"/> Silver	Stainless steel / Aluminium	97 mm	97 mm			€ 56.95



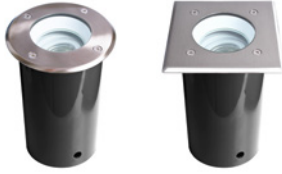

PAVO

·Swivelling insert

Application Area

Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Rated Input Voltage	220-240 V/AC
Height	156 mm	Cut Out Ø	100 mm
Installation Depth	193 mm	Control	Dimmable via optional light source
Max. Power	1x max. 9 W	Swivelling Angle	25 Degree

Article	Housing Color	Length	Width	Ø	Price
730478	<input type="checkbox"/> Silver			160 mm	€ 114.95
730479	<input type="checkbox"/> Silver	160 mm	160 mm		€ 114.95





FLAT 230V 20 DEGREE


· Including 0.5 m connecting cable

Application Area

Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Light Beam Angle	20 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Primary Cable Length	0.5 m
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color	Luminous Flux	Height	Ø	Power	Installation Depth	Price
100111	Silver	400 lm	44 mm	116 mm	5.8 W	44 mm	€ 194.95
100114	Silver	860 lm	42 mm	173 mm	12.2 W	42 mm	€ 279.95



FLAT 230V 120 DEGREE

Application Area

Garden / Terrace / Balcony / Walkways

Housing	Stainless steel, Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Installation Depth	43 mm
Luminous Flux	40 lm	Light Beam Angle	120 Degree
Height	42 mm	Cut Out Ø	100 mm
Ø	116 mm	CRI (Ra)	65
Power	1.3 W	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color	Price
730336	Silver	€ 154.95





HELIOS



·Incl. four heavy-duty anchors


Application Area

Garden / Terrace / Balcony / Walkways, Object lighting / architecture, Park / public outdoor area, Stairs / steps, Hotel / catering

Housing	Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Light Beam Angle	90 Degree
Height	54 mm	CRI (Ra)	80
Ø	210 mm	IK Protection Class	IK10
Rated Input Voltage	220-240 V/AC		

Article	Housing Color		Luminous Flux	Power	Price
732143	■ Dark grey	ww	60 lm	4.0 W	€ 119.95
732049	■ Dark grey	ww	120 lm	4.0 W	€ 119.95
732050	■ Dark grey	ww	180 lm	6.0 W	€ 119.95

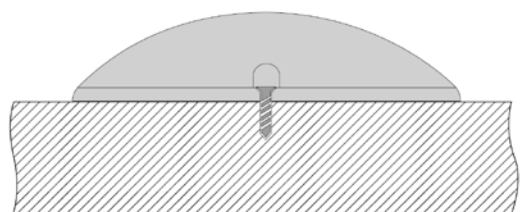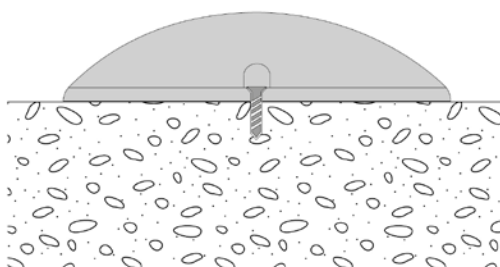

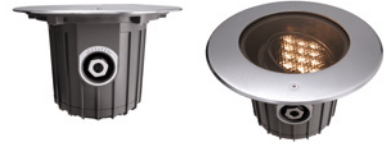

SOFT FLEX

- Adjustable light emission angle
- Including 1 m connecting cable
- Including honeycomb filter

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Swivelling Angle	60 Degree
Colour Temperature	3000 K	CRI (Ra)	80
Rated Input Voltage	220-240 V/AC	Primary Cable Length	1 m
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
Installation Depth	220 mm	Light Distribution	Symmetric

Article	Housing Color	Luminous Flux	Height	Ø	Power	Light Beam Angle	Price	
730267	Silver	WW	480 lm	128 mm	173 mm	9.3 W	15 Degree	€ 359.95
730266	Silver	WW	770 lm	190 mm	250 mm	18.4 W	25 Degree	€ 599.95



Technical data sheet

New in the onlineshop: The technical data sheets offer even more information: Light and energy data, light distribution curves, dimensional drawings and more.





CANUM 24V SYMMETRICAL

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area


Housing	Stainless steel, Aluminium	Installation Depth	150 mm
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Luminous Flux	370 lm	Cut Out Ø	102 mm
Height	102 mm	Control	Dimmable via optional controller
Ø	116 mm	CRI (Ra)	80
Power	5.8 W	Primary Cable Length	2 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color	Price
100133	Silver	€ 195.98



Accessory

862230	OCTO, CV, Mini 24 V/12 W		€ 21.95
872083	IP, CV, V6-40-24		€ 74.95
843501	RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control		€ 99.95

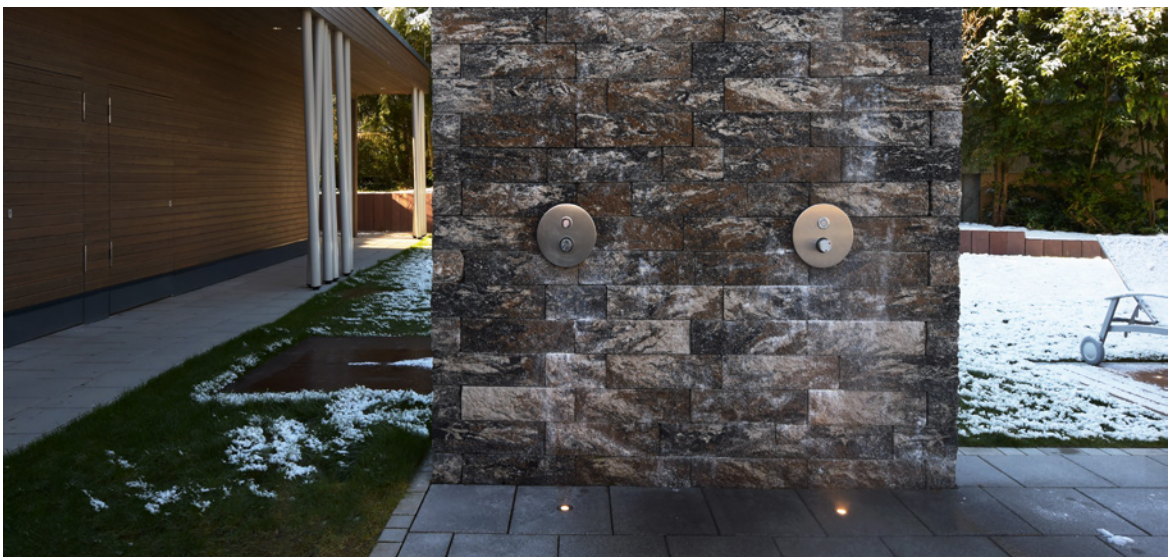



CANUM 24V ASYMMETRICAL

- Including 0.5 m connecting cable with WEIPU plug
- Asymmetrical

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	45 Degree
Colour Temperature	3000 K	Light Beam Angle 2	35 Degree
Luminous Flux	800 lm	Cut Out Ø	157 mm
Height	111 mm	Control	Dimmable via optional controller
Ø	173 mm	CRI (Ra)	80
Power	14 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 2-pole
Power Supply Unit incl.	No	Light Distribution	Asymetric
Installation Depth	153 mm		

Article	Housing Color		Price
730296	Silver	WW	€ 269.95



Accessory

872083 IP, CV, V6-40-24

€ 74.95

843501 RF-smart, starter set LED single/CCT, 12-48 V, 20 A incl. remote control

€ 99.95





CANUM RGB 24V SYMMETRICAL

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	150 mm
Luminous Flux	370 lm	Light Beam Angle	30 Degree
Height	102 mm	Cut Out Ø	102 mm
Ø	116 mm	Control	Dimmable via optional controller
Power	7.4 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	Light Distribution	Symmetric

Article	Housing Color		Price
730276	Silver		€ 219.95



Accessory

872083 IP, CV, V6-40-24

€ 74.95

843502 RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20

€ 99.95





CANUM RGB 24V ASYMMETRICAL

·Including 0.5 m connecting cable with WEIPU plug

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	50 Degree
Luminous Flux	650 lm	Light Beam Angle 2	35 Degree
Height	111 mm	Cut Out Ø	157 mm
Ø	173 mm	Control	Dimmable via optional controller
Power	16.9 W	Primary Cable Length	0.5 m
Rated Input Voltage	24 V/DC	Primary Connection End	WEIPU plug 4-pole
Power Supply Unit incl.	No	IK Protection Class	IK07
Installation Depth	153 mm	Light Distribution	Asymetric

Article	Housing Color		Price
730454	Silver		€ 359.95



Accessory

872083 IP, CV, V6-40-24

€ 74.95

843502 RF-smart, starter set RGB/W/CCT, 12-48 V, 20 A incl. remote, IP20

€ 99.95







CANUM 230V SYMMETRICAL

· Including connecting cable

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area


Housing	Stainless steel, Aluminium	Power Supply Unit incl.	Yes
Colour Temperature	3000 K	Installation Depth	150 mm
Luminous Flux	280 lm	Light Beam Angle	30 Degree
Height	102 mm	Cut Out Ø	102 mm
Ø	116 mm	CRI (Ra)	80
Power	4.1 W	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
		Light Distribution	Symmetric

Article	Housing Color		Price
730255	 Silver		€ 179.95



5-year guarantee

Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



CANUM 230V ASYMMETRICAL


- Asymmetrical
- Including 0.5 m connecting cable

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	153 mm
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Luminous Flux	700 lm	Light Beam Angle 2	35 Degree
Height	111 mm	Cut Out Ø	157 mm
Ø	173 mm	CRI (Ra)	80
Power	11.9 W	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
Power Supply Unit incl.	Yes	IK Protection Class	IK09
		Light Distribution	Asymmetric

Article	Housing Color		Price
730289	<input type="checkbox"/> Silver		€ 269.95



Onlineshop

You can find more information about the products in the onlineshop: Detailed images, videos, project reports, LDT files, EPREL data sheets and more.





LINE

·Incl. connecting cable

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Light Beam Angle	20 Degree
Colour Temperature	3000 K	Cut Out Width	68 mm
Width	68 mm	CRI (Ra)	80
Height	31.5 mm	Primary Cable Length	0.5 m
Rated Input Voltage	220-240 V/AC	Primary Connection End	Connection box
Power Supply Unit incl.	Yes	IK Protection Class	IK07
Installation Depth	80 mm	Light Distribution	Symmetric

Article	Housing Color	Luminous Flux	Length	Power	Cut Out Length	Cutout L x W	Price
730434	Silver	WW	1100 lm	549 mm	18.0 W	527 mm	527 x 68 mm € 389.95
730432	Silver	WW	2300 lm	1025 mm	36.0 W	1007 mm	1007 x 68 mm € 628.95



LINE ASYMMETRICAL

Application Area

Garden / Terrace / Balcony / Walkways, Garage / carport / car park, Park / public outdoor area

Housing	Stainless steel, Aluminium	Installation Depth	90 mm
Colour Temperature	3000 K	Light Beam Angle	45 Degree
Width	63 mm	Light Beam Angle 2	35 Degree
Height	65 mm	Cut Out Width	58 mm
Rated Input Voltage	220-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Primary Connection End	Connection box
		Light Distribution	Asymetric

Article	Housing Color	Luminous Flux	Length	Power	Cut Out Length	Cutout L x W	Price
730292	Silver	WW	340 lm	195 mm	5.5 W	180 mm	180 x 58 mm € 185.95
730262	Silver	WW	730 lm	328 mm	11.9 W	313 mm	313 x 58 mm € 259.95





■
page 122



■
page 123

Floodlights






DEKO-LIGHT RF-SMART FLOODLIGHT RGB+CCT RF + ZIGBEE

- Adjustable brightness and colour saturation
- 16 million available colours and adjustable colour temperature
- 18 automatic programmes pre-installed
- Program and remote control synchronisation when operating multiple RF smart components (repeater function)
- Can be controlled with RF smart wireless remote controls (2.4 GHz, range approx. 30 m, not included in the scope of delivery)
- Can be controlled with all Zigbee 3.0 compatible controllers/apps such as Amazon Echo (Alexa), Google Assistant, Tuya (relevant gateway required, outdoor range up to 100 m)

Application Area

Object lighting / architecture, Garage / carport / car park

Housing	Aluminium, Plastic	Control	RF-Smart, ZigBee 3.0
Colour Temperature	2700-6500 K	Primary Cable Length	1.5 m
Rated Input Voltage	100-240 V/AC	CRI (Ra)	80
Power Supply Unit incl.	Yes	Light Direction	Front
Light Beam Angle	160 Degree	IP Protection Type Plug	IP 44
Swivelling Angle	345 Degree		



843518

Article	Housing Color	Luminous Flux	Length	Width	Height	Power	Price
843518	Anthracite	3300 lm	40 mm	167 mm	227 mm	30.0 W	€ 249.95
843519	Anthracite	4800 lm	48 mm	220 mm	311 mm	50.0 W	€ 349.95
843520	Anthracite	10000 lm	60 mm	295 mm	403 mm	100.0 W	€ 549.95



Accessory

843510	RF-smart, remote control, white, 1 zone, RGB/RGBW/RGB+CCT, IP20	€ 38.95
843511	RF-smart, remote control, black, 1 zone, RGB/RGBW/RGB+CCT, IP20	€ 38.95
843512	RF-smart, remote control, black, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	€ 49.95
843513	RF-smart, wall remote control, white, 3 V, 4 zones, single/CCT/RGB/W/+CCT	€ 69.95
843522	RF-smart, wall remote control, white, 230 V, 4 zones, single/CCT/RGB/W/+CCT	€ 74.95
843514	RF-smart, wall remote control, white, 8 zones, single/CCT/RGB/RGBW/RGB+CCT	€ 109.95
930659	Wall bracket/display arm, metal, black, length: 800 mm	€ 59.95






ATIK

- IEC62662 - Protection against mechanical effects (IK Code)
- EN60598-2-24 - Lights for use in explosive gas and dust atmosphere (D designation)
- Including 2 m connecting cable with IP44 plug

Application Area


Garage / carport / car park, Industry / production / high-bay warehouse

Housing	Aluminium	Swivelling Angle	180 Degree
Colour Temperature	4000 K	Primary Cable Length	2 m
Length	319 mm	Primary Connection End	Power plug IP44
Width	90 mm	CRI (Ra)	80
Height	411 mm	IP Protection Type Plug	IP 44
Power Supply Unit incl.	Yes	IK Protection Class	IK08
Light Beam Angle	110 Degree		



732102

Article	Housing Color	Luminous Flux	Power	Rated Input Voltage	EEL	Price
732096	Black	21350 lm	152.0 W	220-240 V/AC	D	€ 439.95
732097	Black	28450 lm	202.0 W	220-240 V/AC	D	€ 554.95
732098	Black	31800 lm	242.0 W	220-240 V/AC	D	€ 624.95
732102	Black	39900 lm	302.0 W	100-240 V/AC	E	€ 699.95

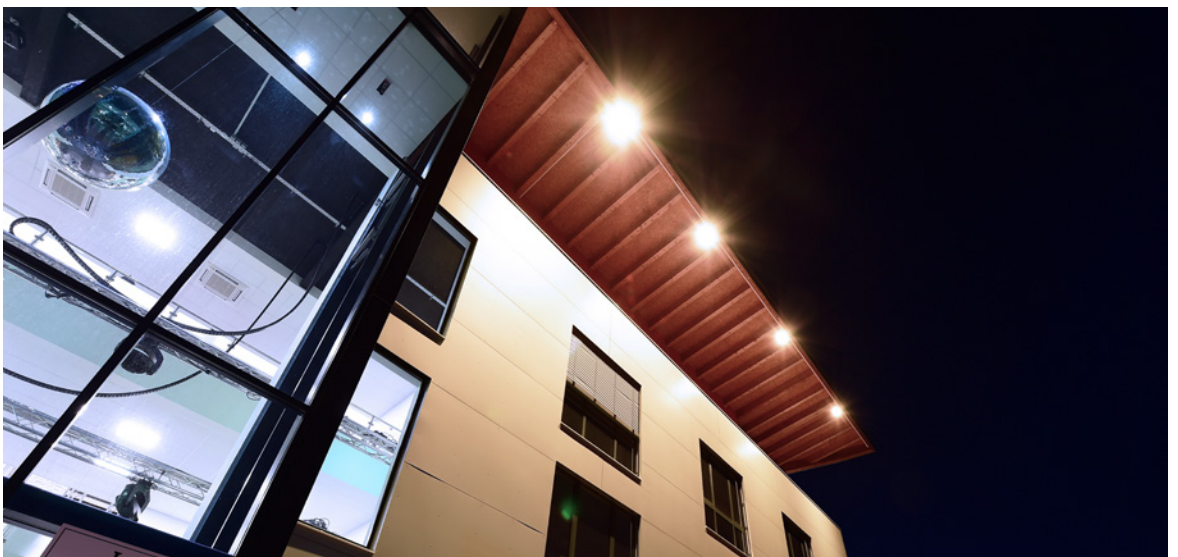



page 126

Display lights





ATIS

When it comes to illuminating signs, façades, billboards or images, display lights are the perfect choice. They are easy to install, exceptionally efficient and suit almost any environment thanks to their timeless design. With corresponding IP protection, they can also be used outdoors, purposefully providing an additional lighting source in such environments.



ATIS


· rotatable and swivelling lamp head

Application Area

Object lighting / architecture, Advertising lighting

Housing	Aluminium
Colour Temperature	3000 K
Luminous Flux	1150 lm
Length	526 mm
Width	144 mm
Base Length	95 mm
Base Height	40 mm
Power	15 W

Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Light Beam Angle	100 Degree
Swivelling Angle	90 Degree
Control	Leading-edge dimmer, Trailing-edge dimmer
CRI (Ra)	80



688020


Article	Housing Color		Price
688020	<input type="checkbox"/> White		€ 229.95
688021	<input checked="" type="checkbox"/> Black		€ 229.95




Lighting design

Interested in our lighting design service?

Your contact person will be happy to answer any questions you may have.



Accessories



■ ■
page 130



■ ■
page 130



■
page 131



■
page 131



■
page 132



■
page 132



■
page 133





MULTI OUTDOOR CABLE CONNECTOR | CONNECTION SLEEVE

- Watertight M25 cable glands
- For two cables measuring 4-14 mm
- For two to five wires measuring 0.5-4 mm²
- Adapter sleeves included in scope of delivery

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	112.53 mm	Rated Input Voltage	12-450 V/AC
Width	29.5 mm	Rated Current	24 A

Article	Housing Color	Price
930571	■ Black, Yellow	€ 9.95

IP68
max.2m



MULTI OUTDOOR Y-SHAPED CABLE CONNECTOR | CONNECTION SLEEVE

- Waterproof M25 cable glands
- For three cables measuring 4-14 mm (adapter sleeves included in the scope of delivery)
- For two to three wires measuring 0.5-4 mm²

Housing	PA 6.6 - Polyamide 6.6	Height	32.56 mm
Length	139.71 mm	Rated Input Voltage	12-450 V/AC
Width	71.88 mm	Rated Current	24 A

Article	Housing Color	Price
930573	■ Black, Yellow	€ 10.95

IP68
max.2m



MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- Watertight M20 cable glands
- For two cables measuring 5-12 mm
- Adapter sleeves included in scope of delivery
- For wires measuring 0.5-2.5 mm²
- Screwed cover (screws included in scope of delivery)

Housing	PA 6.6 - Polyamide 6.6	Height	42 mm
Length	125 mm	Rated Input Voltage	12-450 V/AC
Width	70 mm	Rated Current	24 A

Article	Housing Color	Price
930712	■ Black	€ 9.95

IP68
max.2m



MULTI OUTDOOR CABLE DISTRIBUTOR TWO-WAY

- For wiring low-voltage and 230 V outdoor components
- Robust housing
- For wires measuring 0.5-2.5 mm²
- For two cables measuring 5-12 mm
- Versatile thanks to the adapter sleeves included in the scope of delivery
- Watertight M20 cable glands
- Cover: Quick-action coupling (screwless)

Housing	PA 6.6 - Polyamide 6.6	Rated Input Voltage	12-450 V/AC
Height	46.31 mm	Rated Current	24 A
Ø	65.33 mm		

Article	Housing Color	Price
930578	■ Black	€ 6.95

IP66



MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- Watertight M25 cable glands
- For two to four cables measuring 4-14 mm
- Adapter sleeves and two blanking plugs included in scope of delivery
- For wires measuring 0.5-4.0 mm²
- Screwed cover (screws included in scope of delivery)

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930735	■ Black	€ 19.95

IP68
max.2m



MULTI OUTDOOR CABLE DISTRIBUTOR FOUR-WAY

- Watertight M25 cable glands
- For two to four cables measuring 4-14 mm
- Adapter sleeves and two blanking plugs included in scope of delivery
- For wires measuring 0.5-4.0 mm²
- Screwed cover (screws included in scope of delivery)

Housing	PA 6.6 - Polyamide 6.6	Height	35.3 mm
Length	112.54 mm	Rated Input Voltage	12-450 V/AC
Width	93.3 mm	Rated Current	24 A

Article	Housing Color	Price
930575	■ Black	€ 11.95

IP68
max.2m



MULTI OUTDOOR CABLE DISTRIBUTOR TEN-WAY

- Watertight M25 cable glands
- For two to ten cables measuring 4-14 mm
- Adapter sleeves and eight blanking plugs included in scope of delivery
- For wires measuring 0.5-4 mm²
- Screwed cover (screws included in scope of delivery)
- For wiring low-voltage and 230 V outdoor components
- Versatile thanks to the adapter sleeves included in the scope of delivery

Housing	PA 6.6 - Polyamide 6.6	Height	49.1 mm
Length	182.95 mm	Rated Input Voltage	12-450 V/AC
Width	135.3 mm	Rated Current	24 A

Article	Housing Color	Price
930574	■ Black	€ 39.95

IP68
max.2m




5-year guarantee

Benefit from the maximum quality promise:
All DEKO-LIGHT brand products come with a five-year manufacturer's guarantee.



LIGHT COLOURS / CHANNELS

Depending on the LED equipment, different colours can be mixed with the luminaire via the individual RGB / RGBW channels.



SELECTABLE LIGHT COLOUR

Luminaires with this function allow the light colour to be adjusted and therefore offer a wide range of applications.



COLOUR RENDERING INDEX RA

The colour rendering index Ra describes the measure of the correspondence of the perceived light colour between an existing lighting situation and a reference light source. The higher the Ra value, the better/natural the colour rendering.



COLOUR CONSISTENCY SDCM

The SDCM value describes the standard deviation of an LED from the target colour location and is a measure of production-related colour differences between LEDs with identical values. The higher the value, the greater the colour deviation. The maximum valid deviation is 6 SDCM.



POWER SWITCH

Luminaires with an integrated power switch can be switched in wattage and operated in several power levels. The power reduction enables flexible adjustment of the light intensity and is usually carried out via a dip switch on the unit.



CONTROLLABLE VIA ...

The luminaire can be controlled via one of the following lighting control systems: RF smart [the new control system from DEKO-LIGHT for up to eight light zones], zigbee, DALI, RF [Radio Frequency], Bluetooth, WiFi.



PASSABLE

Drive-on recessed luminaires are generally used outdoors and can withstand particularly high pressure loads from pedestrians, vehicles and other objects. Drive-in luminaires have an IP protection of at least IP67.



THROUGH-WIRING POSSIBLE

This luminaire enables through-wiring and can be connected in series with other luminaires. The advantage: luminaires with through-wiring require only one power connection, eliminating the need for costly laying of additional cables.



LIGHT CAN BE SWITCHED SEPARATELY

Separate connection phases allow the light to be switched independently of the socket.



IP PROTECTION

The IP protection class indicates the protection of live parts against the ingress of foreign bodies and contact [first digit] and against water [second digit] with two digits. The following applies: The higher the respective digit, the higher the protection.



SEAWATER RESISTANT

These lights have been developed for use in coastal regions and can withstand the increased salt and moisture in the environment – ideal for outdoor areas near the sea.



IK IMPACT RESISTANCE








The IK value [or IK impact resistance level] indicates how shock and impact resistant a luminaire or certain components of the luminaire are. The following applies: The higher the IK value [IK00 to IK10+], the greater the protection against external mechanical stress.




NIGHTSAVER

The downward-directed light reduces scattered light and provides targeted protection against light pollution.








ELECTRIC CHARACTERISTICS

-  CV
constant voltage
-  CC
constant current
-  SELV
safety extra-long voltage
-  flicker free
-  solar panel
-  USB charging socket
-  battery operation



LAMP

-  E14
base of lamp








FUNCTIONALITY

-    swivel-mounted + rotatable and swivel-mounted + rotatable
-     radiation direction











SURFACE

-  NANO coating IP XX [see product description]
lotus effect: Water rolls off and takes all dirty surface particles with it.
-  surface paintable / individual design

CONTROL

-  movement sensor [IR / HF]
-  presence detector
-  DMX control
-  dimmable
-  1 CH  4-6 CH
number of channels
-  emergency power supply

SAFETY

-  IP65
IP protection class
-  walkable
-  passable
-  safety lamp control gear
-  components may be installed on fixtures of materials, the fire behavior of which is not always known.
-  110
max. surface temperature of lamp control gear
-  lights with limited surface temperature
-  protection class I
-  protection class II [protective isolation]
-  protection class III [protective low voltage]

0
 000097 892
 000099 892
 000103 892
 000104 892
 000106 892
 000107 892

1
 100111 108
 100114 108
 100133 112

3
 348071 77
 348072 77

6
 620123 68
 620124 68
 620125 68
 620126 68
 620127 68
 620194 8
 620195 8
 620196 8
 620197 8
 620198 8
 620199 8
 620200 8
 620201 8
 620202 10
 620203 10
 620204 10
 620205 10
 620206 10
 620207 10
 620208 10
 620209 10
 688020 126
 688021 126

7
 730255 116
 730262 119
 730266 110
 730267 110
 730276 114
 730289 117
 730292 119
 730296 113
 730330 64
 730336 108
 730408 76
 730432 119
 730434 119
 730454 115
 730474 106
 730475 106
 730478 107
 730479 107
 730492 18
 730493 18
 730494 18
 730495 14
 730496 14
 730497 14
 730498 14
 730499 16
 730500 16
 730501 16
 730502 16
 730503 16
 730504 16
 730505 16

730506 16
 731015 54
 731019 54
 731020 54
 731024 54
 731025 54
 731026 54
 731029 55
 731030 55
 731031 48
 731060 64
 731099 60
 731100 60
 731126 68
 731127 58
 731129 62
 731130 52
 731131 53
 731133 49
 731134 62
 731135 62
 731136 62
 731138 66
 731139 67
 731140 66
 731141 67
 731144 49
 731151 51
 731153 50
 731154 50
 731155 50
 731156 50
 731157 51
 731158 70
 731159 70
 731160 74
 731161 74
 731162 74
 731169 40
 731170 40
 731171 40
 731172 40
 731173 40
 731174 40
 731175 41
 731176 41
 731177 41
 731178 41
 731179 41
 731180 41
 731181 46
 731182 46
 731183 46
 731184 46
 731185 46
 731186 46
 731187 47
 731188 47
 731189 47
 731190 47
 731191 47
 731192 47
 731193 39
 731194 39
 731195 39
 731196 38
 731197 38
 731198 38
 731199 45
 731200 45
 731201 45
 731202 44
 731203 44
 731204 44
 731205 42
 731206 42
 731207 42
 731208 43

731209 43
 731210 43
 731211 34
 731212 34
 731213 34
 731214 35
 731215 35
 731216 35
 731217 36
 731218 36
 731219 36
 731220 37
 731221 37
 731222 37
 731223 56
 731224 56
 731225 57
 731226 57
 731227 64
 731228 52
 731229 52
 731230 52
 731231 53
 731232 53
 731233 53
 732049 109
 732050 109
 732071 102
 732072 102
 732079 103
 732080 103
 732094 95
 732095 95
 732096 123
 732097 123
 732098 123
 732102 123
 732108 96
 732109 97
 732110 98
 732127 96
 732128 97
 732129 98
 732143 109
 732160 94
 732161 94
 733004 26
 733040 22
 733041 22
 733042 22
 733043 24
 733044 24
 733045 24
 733054 84
 733055 84
 733066 86
 733067 86
 733068 28
 733069 28
 733070 88
 733071 88
 733072 20
 733073 20

8
 836011 80
 836014 80
 836930 80
 836931 80
 843518 122
 843519 122
 843520 122
 843521 92
 843539 92

9
 930571 130
 930573 130
 930574 133
 930575 132
 930578 131
 930712 131
 930735 132

You can find our complete range for professional building lighting in our online store or in our main catalogue.

Whether refurbishment, modernization or new construction - our versatile portfolio offers the right solution for every application. With well thought-out lighting concepts and innovative products, we create optimum conditions for energy-efficient, sustainable and future-proof lighting.



main catalogue 25/26



Onlineshop

